

Wireless Air Source Heat Pump Thermostat DATASHEET



一:

Transmitter SPECIFICATIONS
Power Supply: 2pcs AAA batteries (User-supplied)
White backlight, TN display screen
Control Mode: RF 868MHz
Room Temperature Display Range: 0°C~99°C
Temperature Control Accuracy: $\pm 0.5^{\circ}\text{C}$
Working Temperature Range: 0~50°C; Humidity Range: 5~95%RH (non-condensing), Transport temperature range: -20~65°C
Installation Method: Desktop Stand. Wall mounting is optional (European Round Box 60×60mm, Installation Hole Dimension 50-60mm).

二:

Transmitter FEATURES
Control modes: Manual mode, Auto mode (7-day weekly programming), Sleep mode
Child lock

深圳市新贵峰科技有限公司 SHENZHEN GREAT PEAK TECHNOLOGY CO., LTD.

Contact: Jane 贺

email: jane@smartoo.com


tel. +86 17704055988

Anti-frost Protection
Window open detection (Software)
Collect room temperature and set temperature control
Parameter setting in engineering mode
RF 868MHz communication control
Communication alarm, temperature sensor alarm, output feedback reminder
Set temperature range: 16~30°C, factory default: 24°C

三： Screen Display



四： Buttons

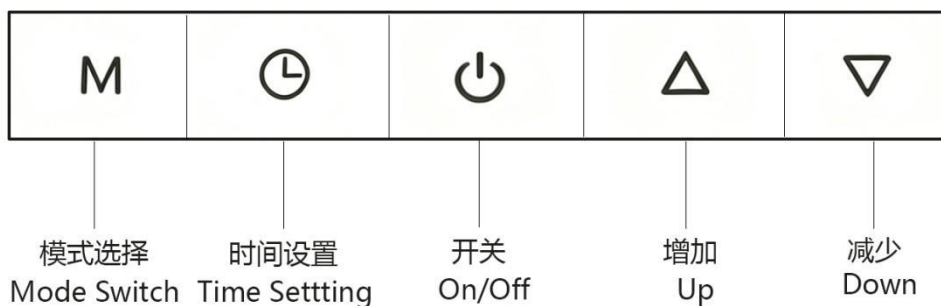

深圳市新贵峰科技有限公司 SHENZHEN GREAT PEAK TECHNOLOGY CO., LTD.


Contact: Jane 贺

email: jane@smartoo.com

tel. +86 17704055988

五:

Receiver Technical Specifications
Power Supply Voltage: AC 110-220V, 50/60Hz
Dry contact control, maximum 10A
Communicates with the transmitter at 868MHz
Tuya 2.4G WiFi
Compatible with Alexa and Google Home Assistant voice control

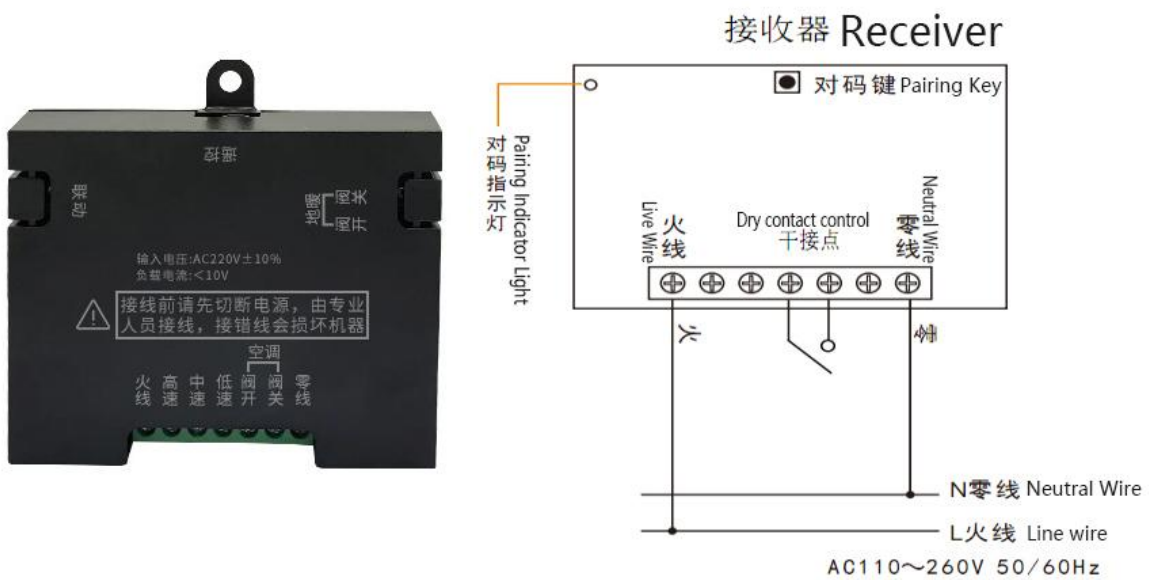

深圳市新贵峰科技有限公司 SHENZHEN GREAT PEAK TECHNOLOGY CO., LTD.

Contact: Jane 贺

email: jane@smartoo.com

tel. +86 17704055988