

LAWN LIGHT



DL5001 P/F01



DL5002 P/F03



DL5003 P/F05



DL5004 P/F07



DL5005 P/F09



DL5006 P/F11



DL5007 P/F13



DL5008 P/F15



DL5009 P/F17



DL5010 P/F19



DL5011 P/F21



DL5012 P/F23



DL5013 P/F25



DL5014 P/F27



DL5015 P/F29



DL5016 P/F31



DL5017 P/F33



DL5018 P/F35



DL5019 P/F37



DL5020 P/F39



DL5021 P41



DL5022 P/F43



DL5023 P/F45



DL5024 P/F47



DL5025 P/F49



DL5026 P/F51



DL5027 53



DL5028 P/F55



DL5029 P/F57



DL5030 P/F59

P/F61

Professional LED Luminaries Manufacturer



草坪灯系列

DL5001A/B/C


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

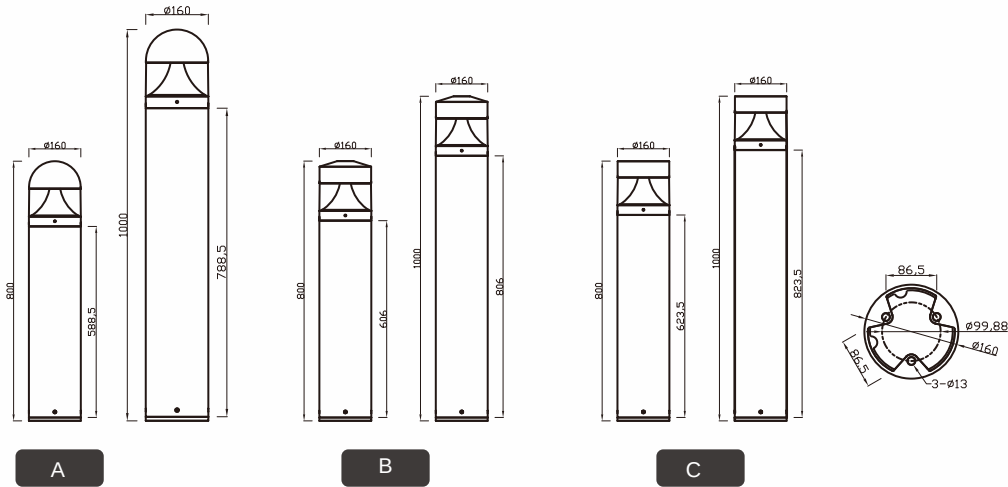


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

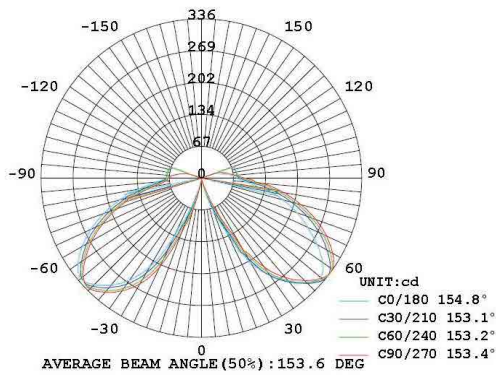

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5001-10w	10W	2835/3030	750lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5001-14w	14W	2835/3030	1055lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5001-20w	20W	2835/3030	1463lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5001-24w	24W	2835/3030	1672lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5001-30w	30W	2835/3030	2070lm	2700-6500K	≥80	AC85-305V	IP65	IK08

NEW VISION

Professional LED Luminaries Manufacturer



草坪灯系列

DL5002


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

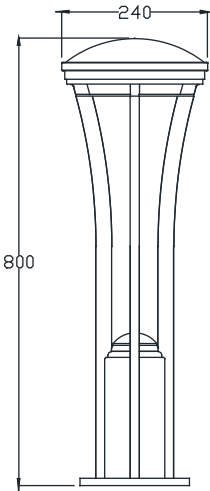

Installation plate

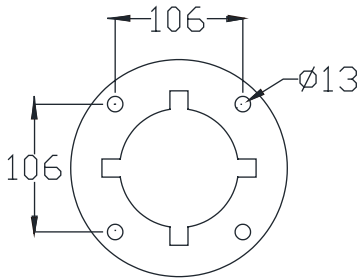


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

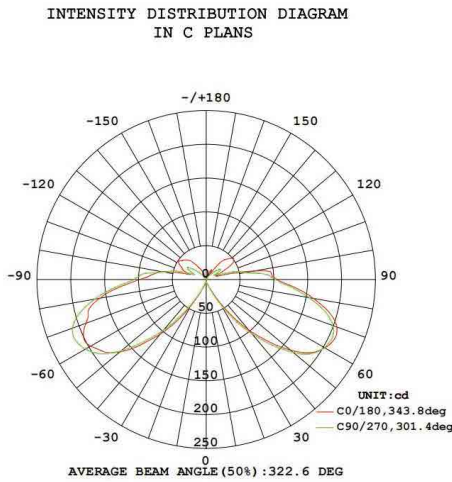

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5002-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5002-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5003A/B


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions


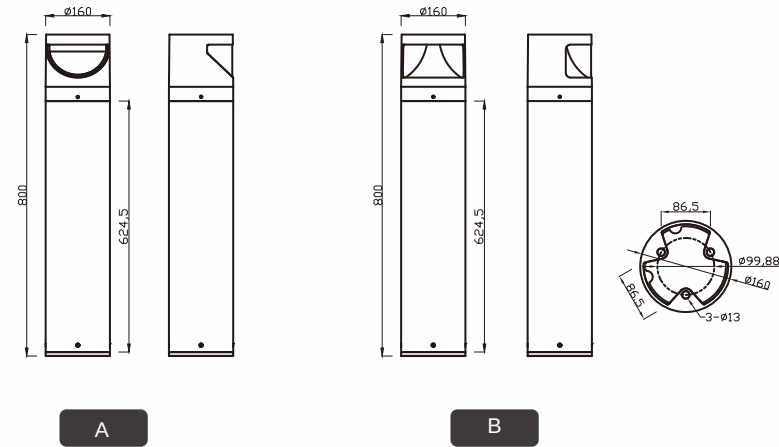


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

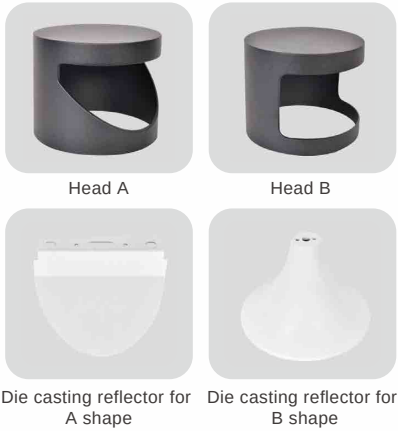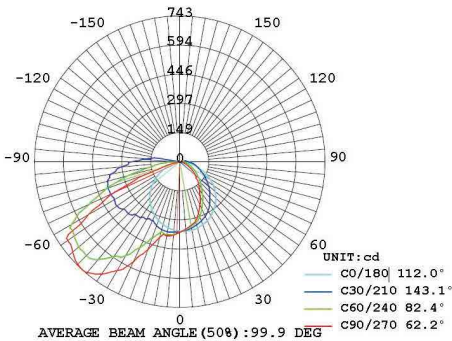

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5003A-10w	10W	2835/3030	845lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003A-14w	14W	2835/3030	1140lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003A-20w	20W	2835/3030	1535m	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003A-24w	24W	2835/3030	1805m	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003B-10w	10W	2835/3030	721lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003B-14w	14W	2835/3030	967lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003B-20w	20W	2835/3030	1330lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5003B-24w	24W	2835/3030	1500lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5004A/B/C


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

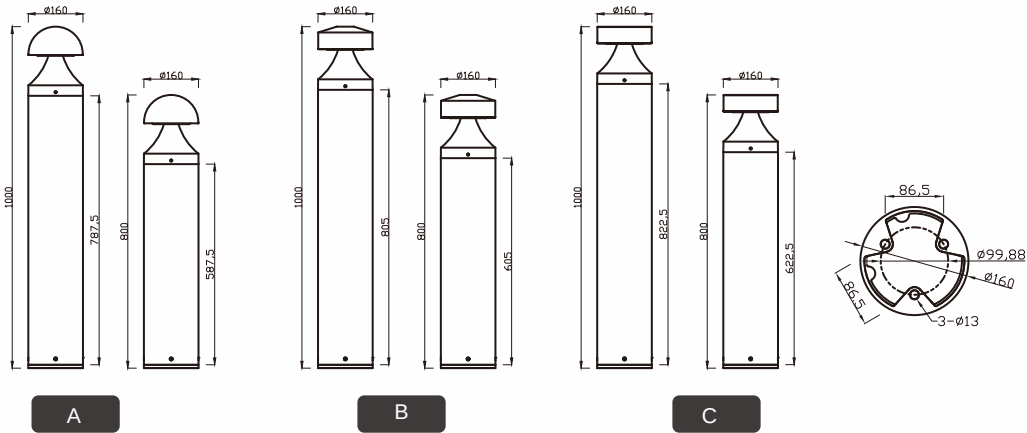


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

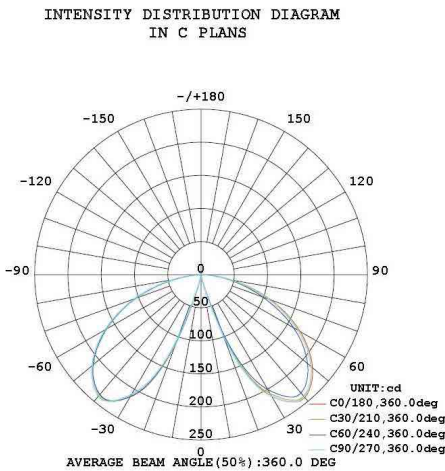

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5004-10w	10W	2835/3030	450lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5004-14w	14W	2835/3030	630lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5004-20w	20W	2835/3030	829lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5004-24w	24W	2835/3030	983lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5004-30w	30W	2835/3030	1243lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5005A/B/C


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

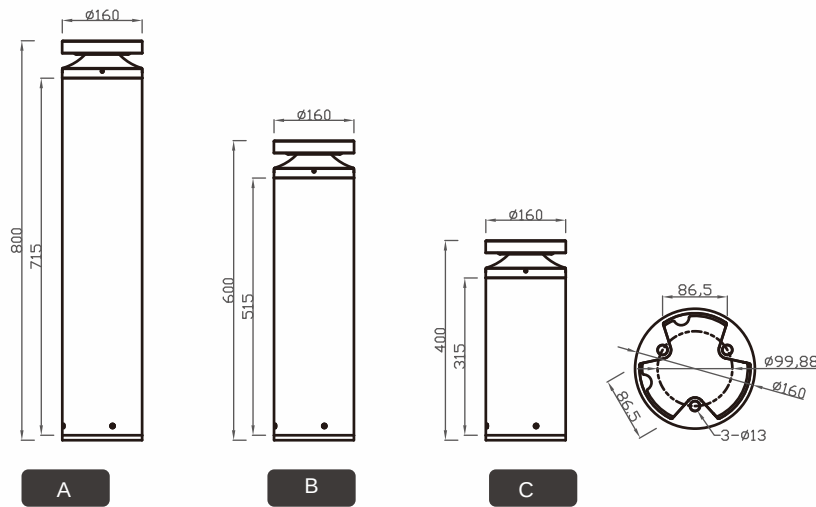


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

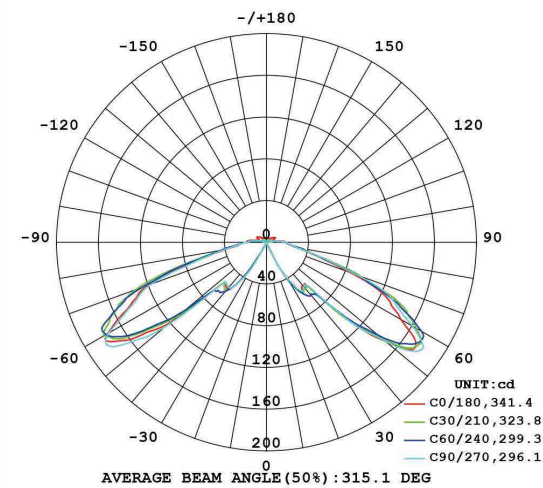

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5005-10w	10W	2835/3030	600lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5005-14w	15W	2835/3030	900lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5005-20w	20W	2835/3030	1200lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5005-24w	25W	2835/3030	1500lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5006


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

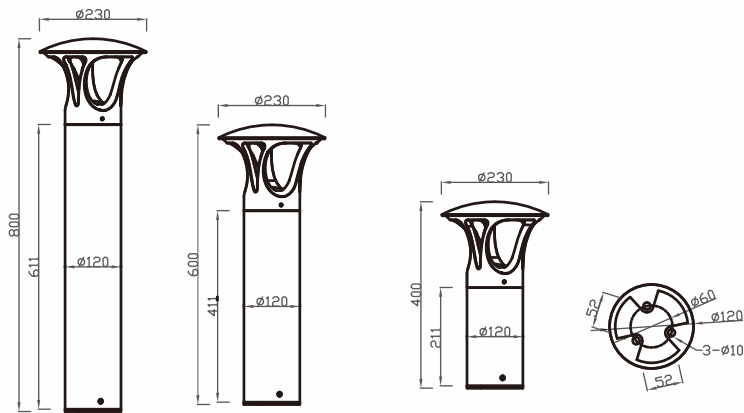


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

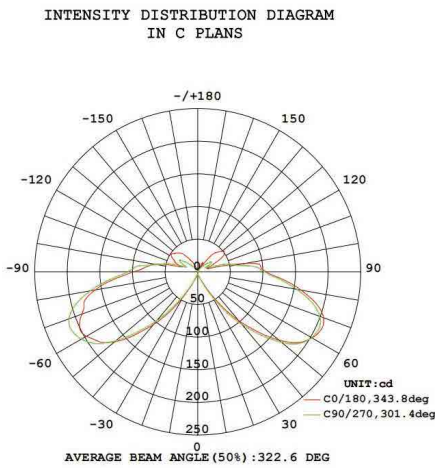

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5006-10w	10W	2835/3030	600lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5006-14w	15W	2835/3030	900lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5006-20w	20W	2835/3030	1200lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5007


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance, With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

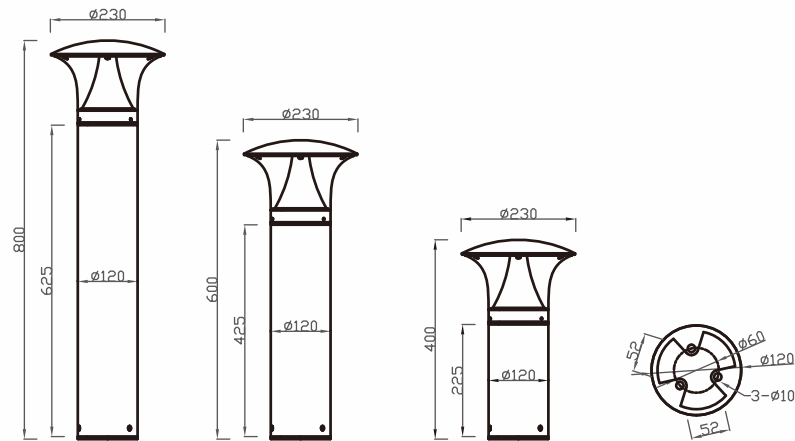


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

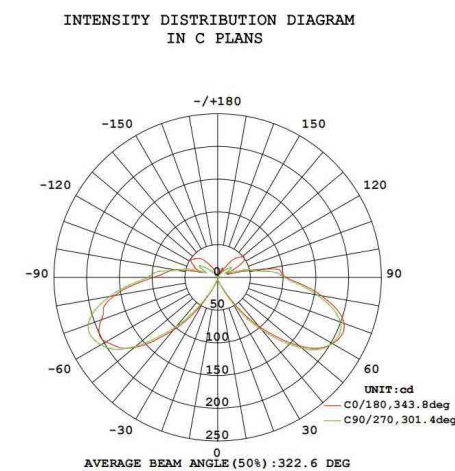

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5007-10w	10W	2835/3030	600lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5007-14w	15W	2835/3030	900lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5007-20w	20W	2835/3030	1200lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5008A/B


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

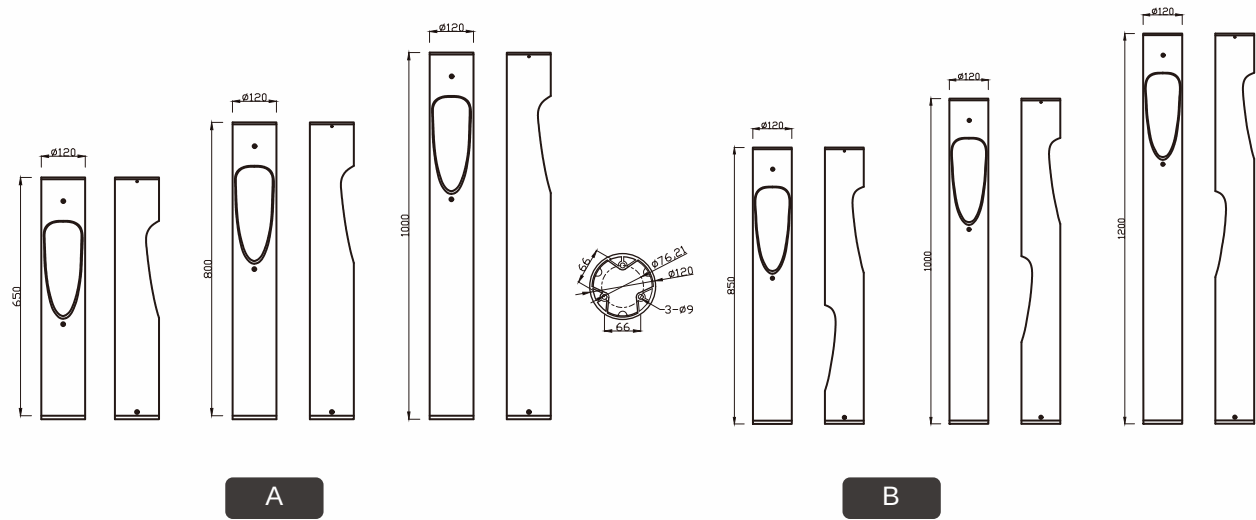


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

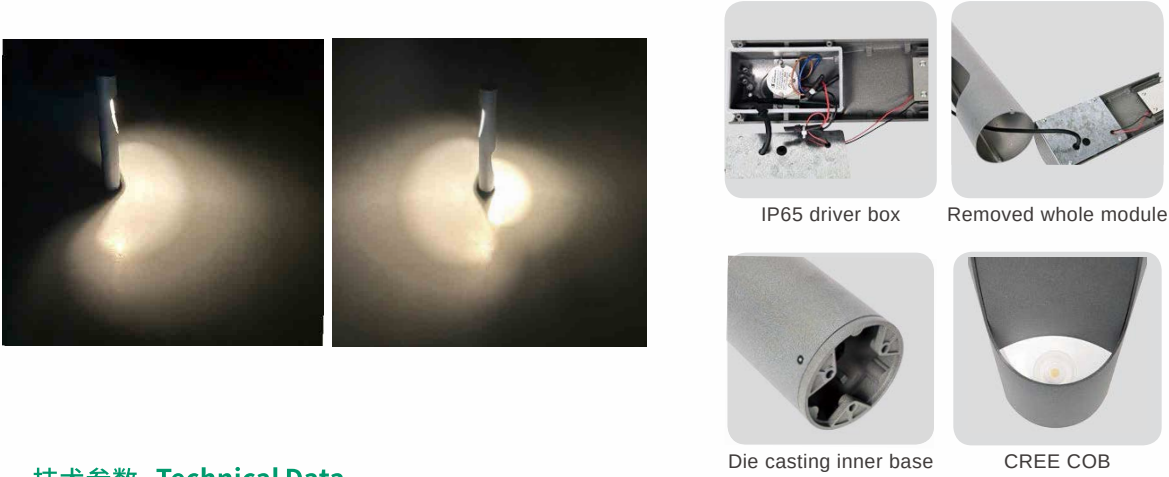

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5008-10w	10W	2835/3030	400lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5008-10w x 2	10Wx2	2835/3030	400lmx 2	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5009


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions


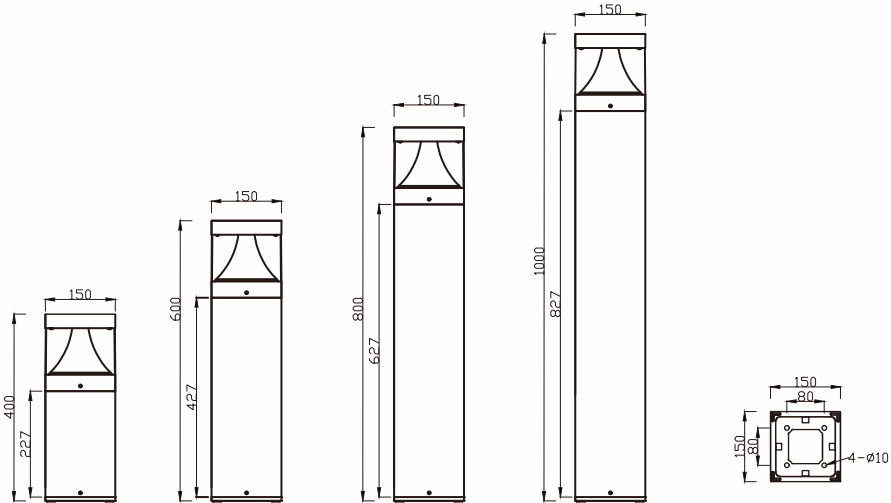


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

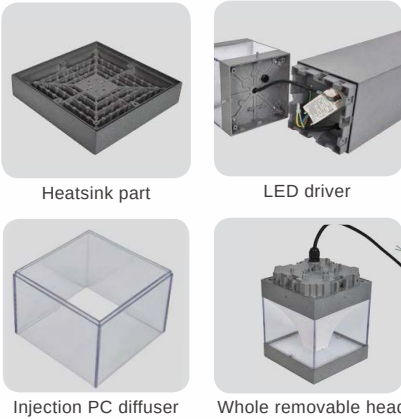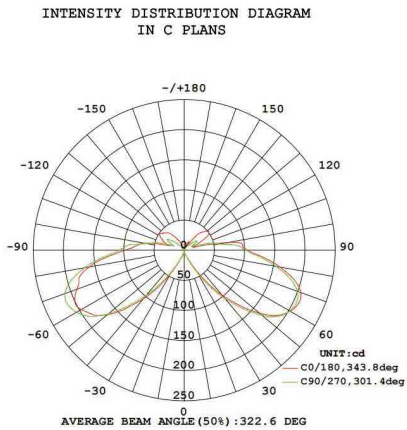

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5009-10w	10W	2835/3030	800lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5009-15w	15W	2835/3030	1600lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5009-20w	20W	2835/3030	2400lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5009-25w	24W	2835/3030	3000lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5009-30w	30W	2835/3030	4800lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5010A/B


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

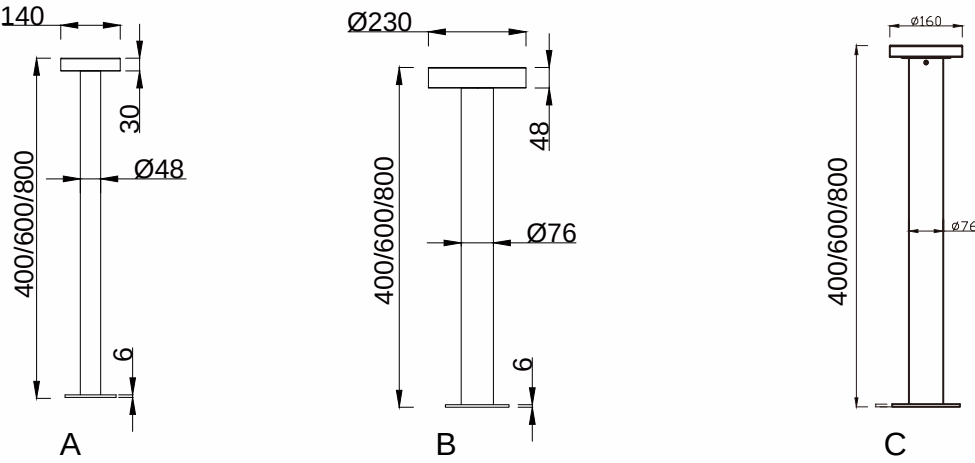


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

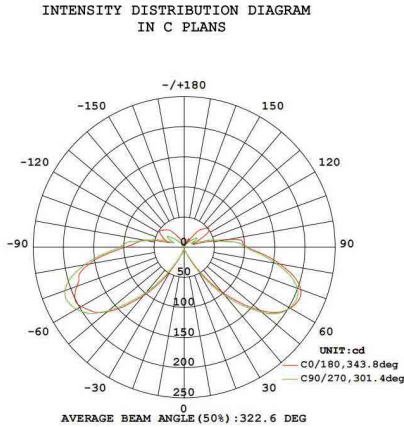

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5010A-10w	10W	2835/3030	663Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5010B-10w	10W	2835/3030	811Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5010B-14w	14W	2835/3030	1091Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5010B-20w	20W	2835/3030	1498Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5010B-24w	24W	2835/3030	1753Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5010B-30w	30W	2835/3030	2091Lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5011


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08

Specification


- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions


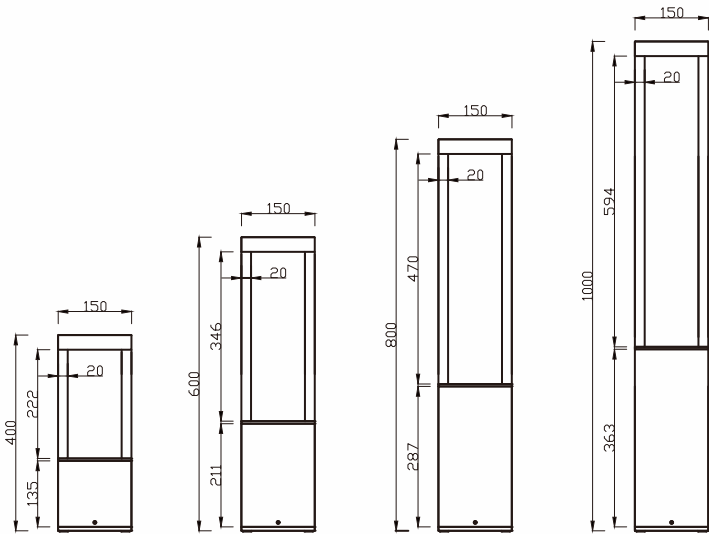


LED BOLLARD LIGHT

产品应用 Application

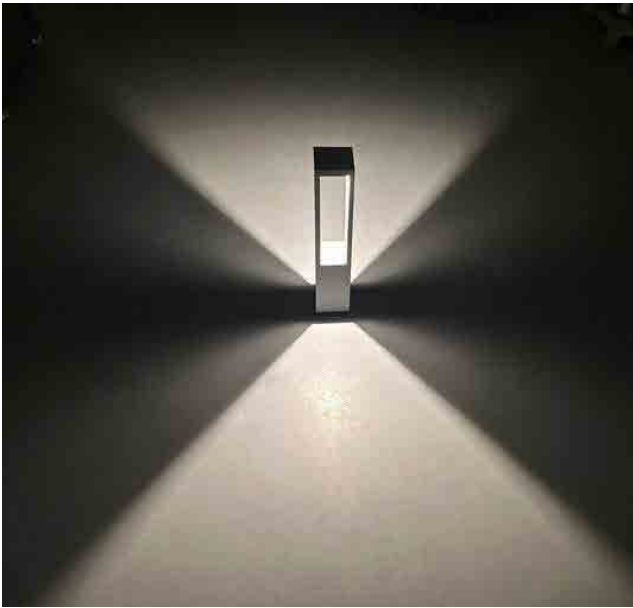

应用透镜 Optical Application

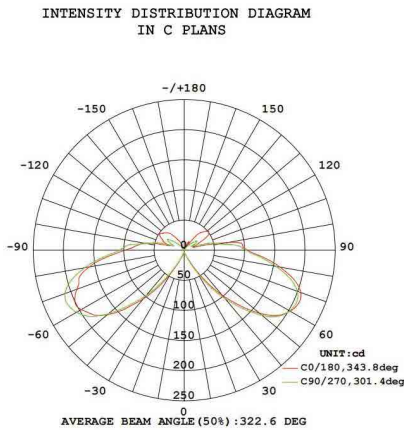

Heatsink part



IP66 driver box



Die casting inner base



Ultrawhite glass

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5011-10w	10W	2835/3030	600Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5011-15w	15W	2835/3030	900Lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5011-20w	20W	2835/3030	1200Lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5012


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance, With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

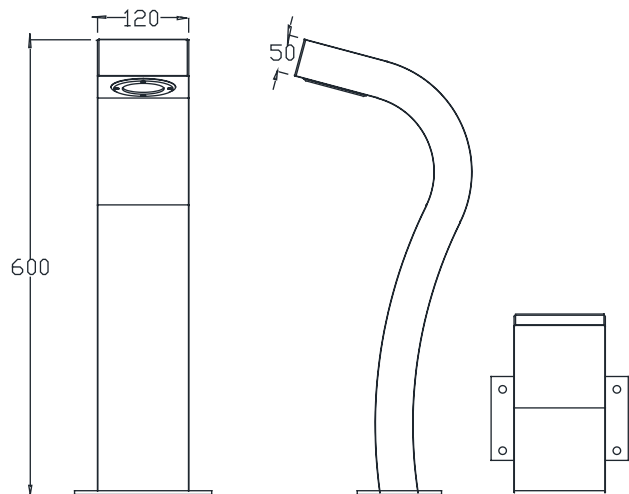

Installation plate

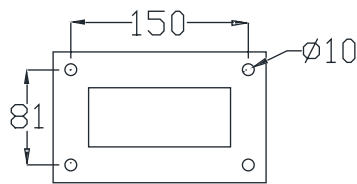


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

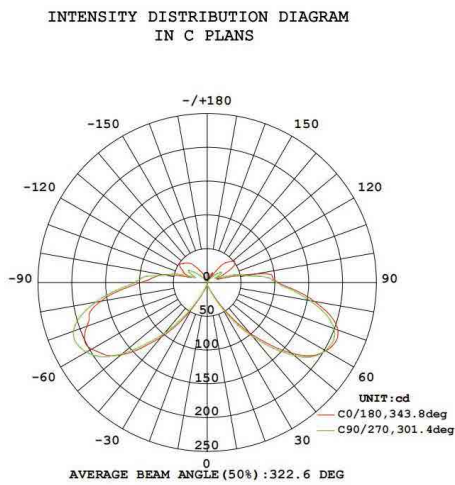

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5002-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5002-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5013


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

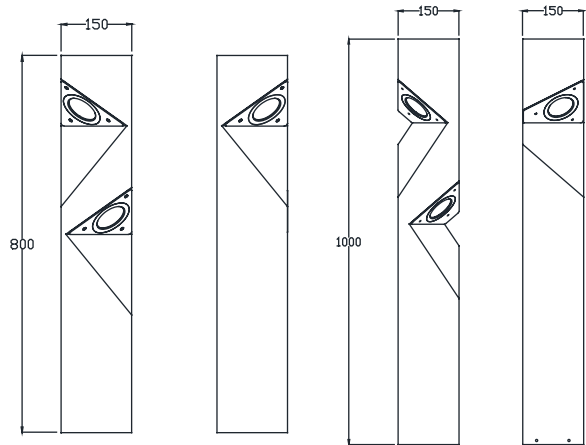

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

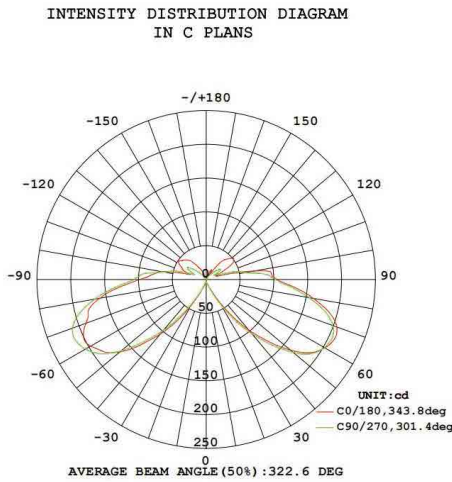

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5013-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5013-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5014


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

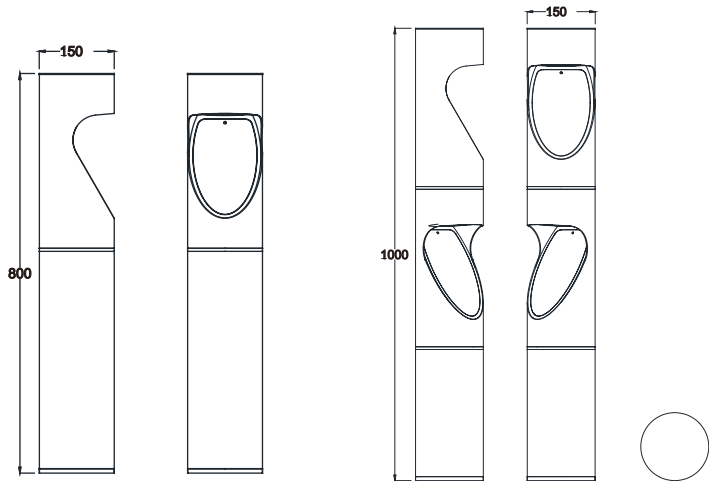

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

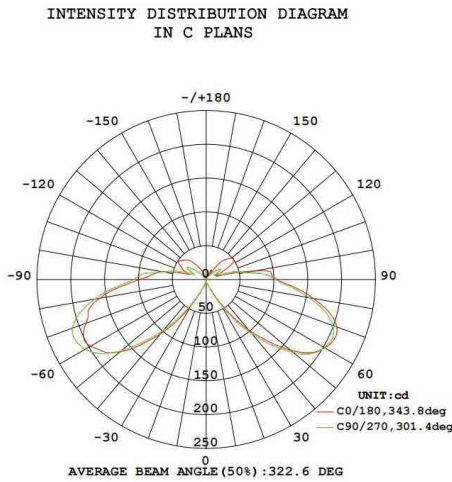

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5014-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5014-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5015A/B/C


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

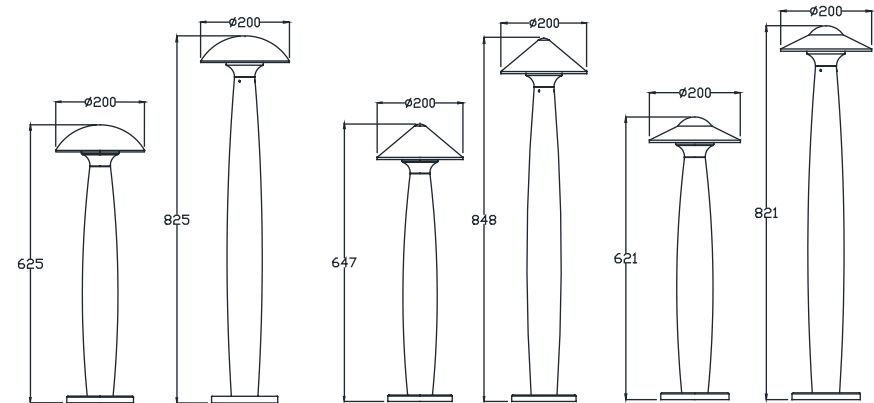

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

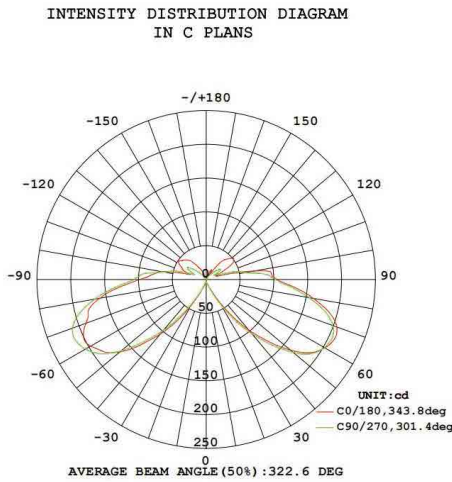

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5015-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5015-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5016


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

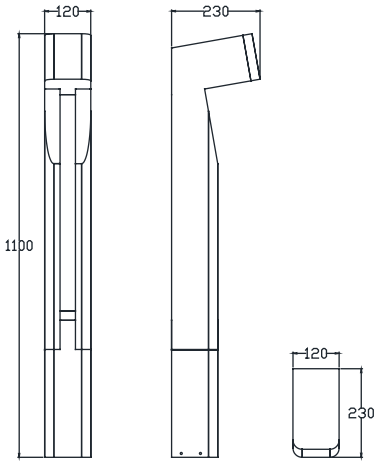

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

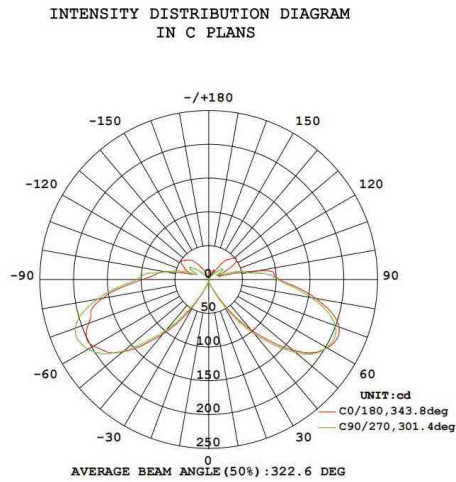

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5016-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5016-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5017


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

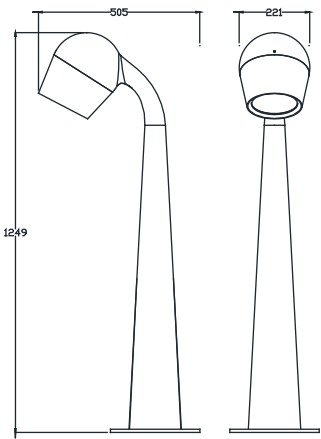

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

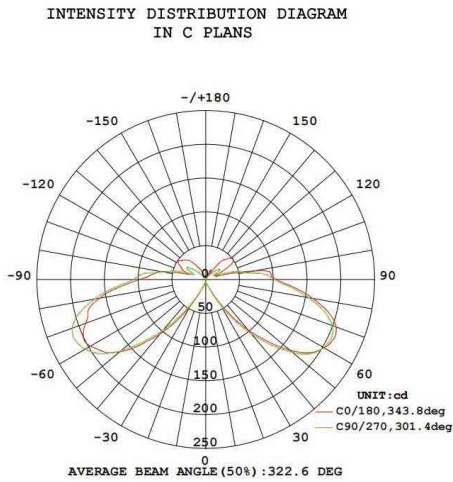

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5017-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5017-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5018


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

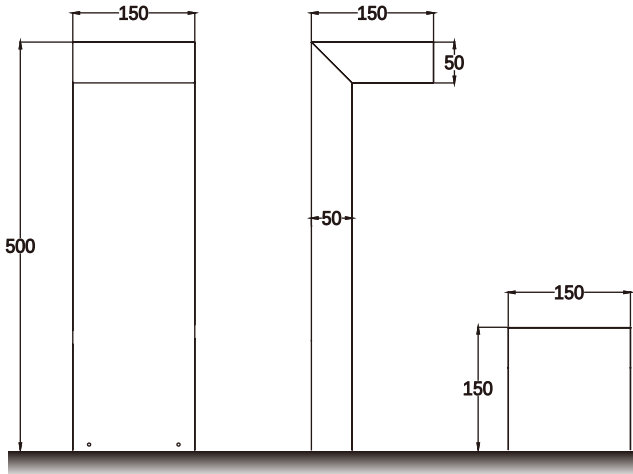

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

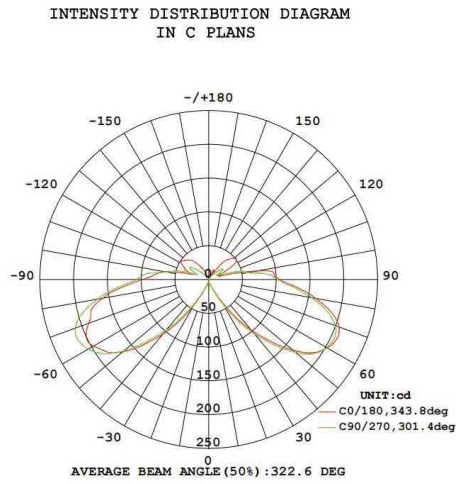

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5018-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5018-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5019


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

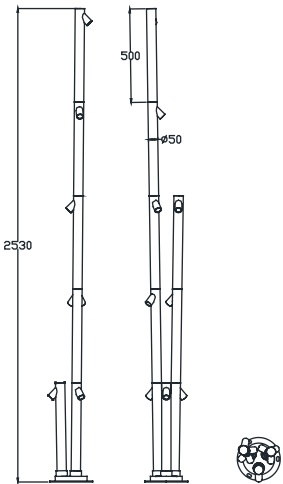


Installation plate




LED BOLLARD LIGHT

产品应用 Application

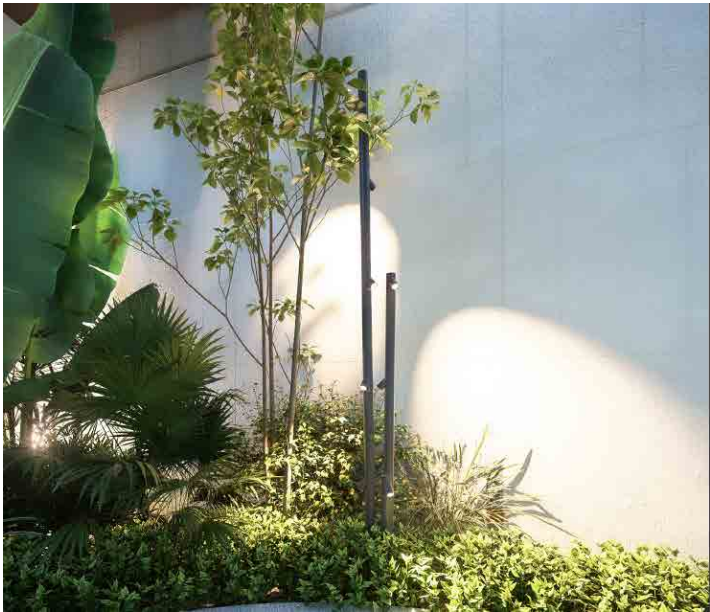

应用透镜 Optical Application

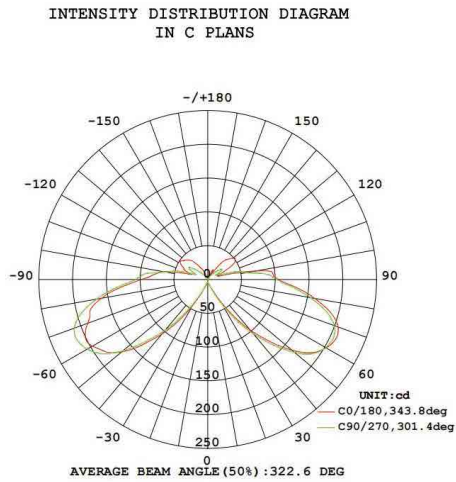

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5019-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5019-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5020


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08



Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

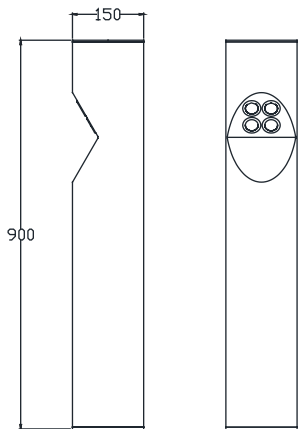

Installation plate

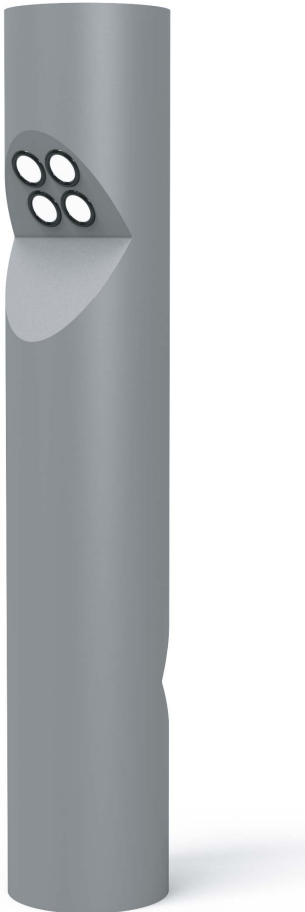


LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

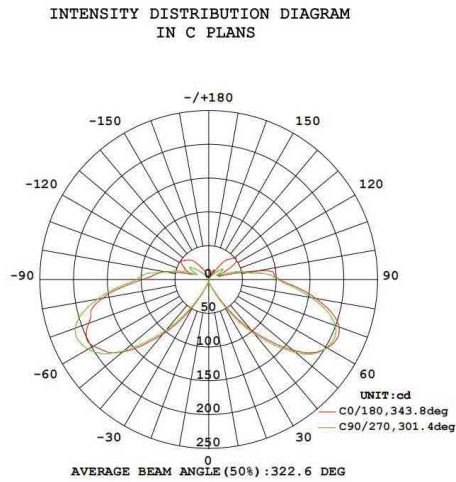

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5020-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5020-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5021


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

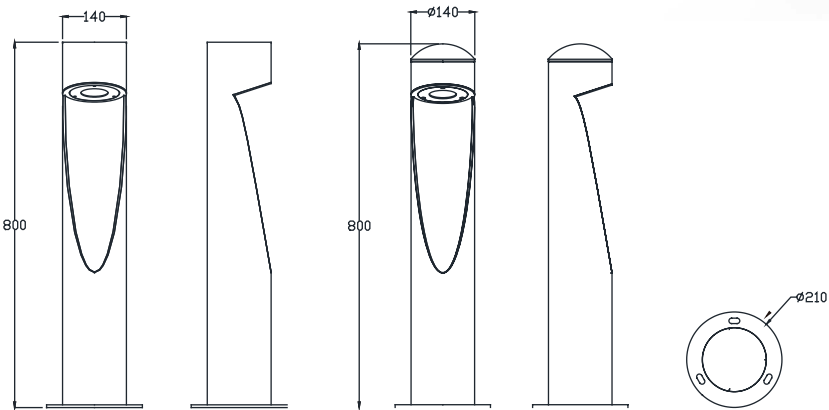

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

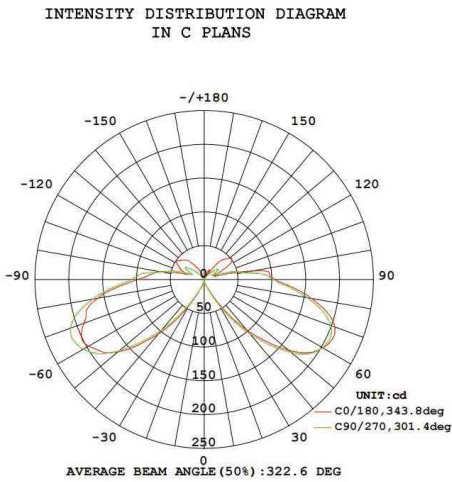

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5021-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5021-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5022


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

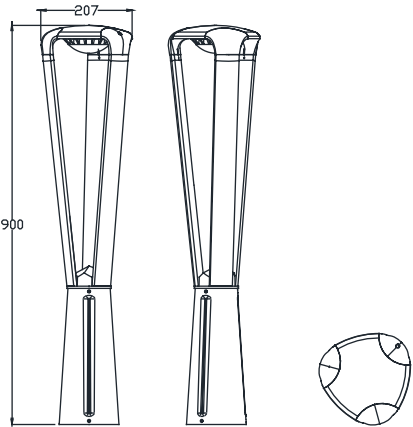

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

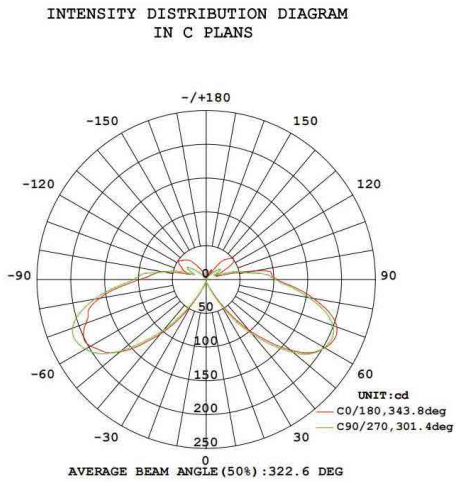

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5022-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5022-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5023


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率和防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

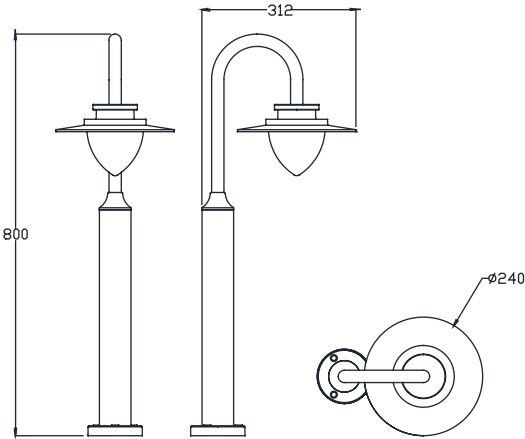

Installation plate




LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

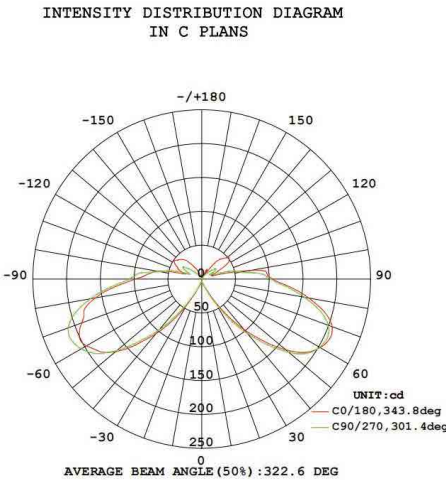

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5023-10w	10W	2835/3030	700lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5023-12w	12W	2835/3030	1100lm	2700-6500K	≥80	AC85-305V	IP65	IK08

Professional LED Luminaries Manufacturer



草坪灯系列

DL5024 A/B


产品描述

- 主体由压铸铝合金和挤压铝合金制成
- 扩散器是透明的抗紫外线聚碳酸酯，具有高效率 and 防破坏性，带防眩板
- 通过可拆卸的头可轻松检查LED和驱动器。
- 防拆固定件，可提高抗破坏性。
- 防紫外线静电粉末喷涂，常规颜色：黑色、银色、RAL7043、RAL7016
- 防护等级：IP65 和 IK08


Specification

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance,With anti-glare plate.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

尺寸简图 Dimensions

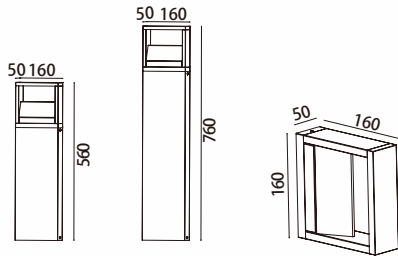

A

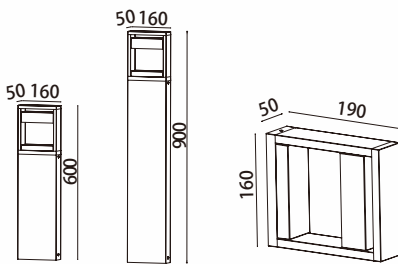

B



Adjustable $\pm 45^\circ$



A


B

LED BOLLARD LIGHT

产品应用 Application



应用透镜 Optical Application

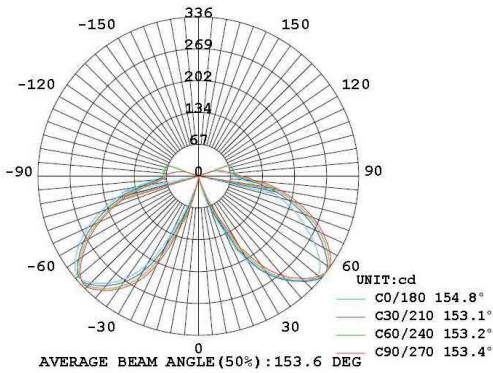

技术参数 Technical Data

Model Number 产品型号	Power 功率	LED Source 光源	Lumen 光通	Color Temperature 色温	CRI 显指	Input Voltage 输入电压	IP 防水防尘	Protective Grade 防护等级
DL5024A-8w	8W	2835/3030	800lm	2700-6500K	≥80	AC85-305V	IP65	IK08
DL5024B-8w	8W	2835/3030	800lm	2700-6500K	≥80	AC85-305V	IP65	IK08