

FCC 47 CFR PART 15 Subpart B

TEST REPORT

Equipment Industrial Control Switchboard

Trademark N/A

Model No. MNS, GCK, GCS, VFD, ATS, ACC, ACP, AP, AL, AF, APE, ALE, AD, AS, AR, AW, JXF, XM, XL-21, GGD, GGJ, DB, PDU, ODC, OSG, ODB, OTC, AH, AM, AA, AJ

Applicant Riches hardware Co., Ltd
Building 168 Guangren Road, Xintian Group, Dongya Village Committee, Ruhu Town, Huicheng District, Huizhou City, Guangdong Province, China

Manufacturer Riches hardware Co., Ltd
Building 168 Guangren Road, Xintian Group, Dongya Village Committee, Ruhu Town, Huicheng District, Huizhou City, Guangdong Province, China

Prepared by Shenzhen Anteng Testing Technology Co., Ltd.
Floor 5, No. 11, Hebei Industrial Zone, Hualian Community, Longhua Street, Longhua District, Shenzhen, China.


Report No. ATJC25101380005200E


Date of Test Oct. 13 - 25, 2025

Date of Issue Oct. 25, 2025

Test Standard(s) CFR47, FCC Part 15 Subpart B, ANSI C63.4: 2014

In the configuration tested, the EUT complied with the standards specified above.

Tested :  Date : Oct. 25, 2025
Aria Yan/ Engineer

Approved :  Date : Oct. 25, 2025
Henry Tian / Manager

Note:

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ATJC. This document may be altered or revised by ATJC personnel only, and shall be noted in the revision of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
0	Oct. 25, 2025	Initial Issue	All Page	Aria Yan

Table of Contents

1. GENERAL INFORMATION	4
1.1. Description of EUT	4
2. TEST SUMMARY	5
3. FACILITIES	6
3.1. Test Facility	6
3.2. Test Instruments	6
4. Measurement Uncertainty	7
4.1. Operating Condition of EUT	7
4.2. Test Conditions	7
5. Conducted Emission	8
5.1. Limit	8
5.2. Test Setup	8
5.3. EMI Test Receiver Setup	8
5.4. Test Procedure	9
5.5. Test Results	9
6. Radiated Emission	12
6.1. Limit	12
6.2. Test Setup	12
6.3. Test Procedure	13
6.4. Corrected Amplitude & Margin Calculation	13
6.5. Test Results	13
7. Photographs of EUT	16

1. GENERAL INFORMATION

1.1. Description of EUT

Equipment	Industrial Control Switchboard
Trade Mark	N/A
Model No.	MNS, GCK, GCS, VFD, ATS, ACC, ACP, AP, AL, AF, APE, ALE, AD, AS, AR, AW, JXF, XM, XL-21, GGD, GGJ, DB, PDU, ODC, OSG, ODB, OTC, AH, AM, AA, AJ
Model Difference	Only the model name and the color of the exterior are different.
I/O Port	N/A
Rated Power Supply	Input:1000V~, 50/60Hz, 4000kW Max
Testing Voltage	AC1000V
EUT Power Rating	4000kW Max
Configuration	☒ Table-top ☐ Floor-standing
Accessory Device	N/A
Cable Supplied	N/A

1. The EUT uses following adapter

Adapter	--	--
Manufacturer	--	--
Model	--	--
AC Input Power	--	--
DC Output Power	--	--
Plug Type	--	--
Power Cord	--	--

2. Other Accessory Device List and Details

Description	Manufacturer	Model	Note
--	--	--	--
--	--	--	--

External I/O Cable

Cable Description	Shielded Type	Ferrite Core	Length(m)	Note
--	☐ Shielded ☒ Non-shielded	☒ Yes ☐ No	--	--
--	--	--	--	--

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Rules	Test Item	Test Result
§15.107	Conducted Emission	PASS
§15.109	Radiated Emission	PASS

Remark: N/A is abbreviation for Not Applicable.

The test was carried out in all the test modes, only the worst data are list in report.

3. FACILITIES

3.1. Test Facility

ATJC-LAB

Floor 5, No. 11, Hebei Industrial Zone, Hualian Community, Longhua Street, Longhua District, Shenzhen, China.

3.2. Test Instruments

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

Table list of the test and measurement equipment

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	R&S	ESH3-Z5	831551852	2025.10.30
2	Pulse limiter	R&S	ESH3Z2	357881052	2025.10.30
3	EMI test Receiver	R&S	ESCI	834115/006	2025.10.30
4	Coaxial cable	ZDECL	Z302S-BNCJ-BNCJ-1.5M	18091904	2025.10.30
5	CE Test software	FALA	EZ-EMC	Ver. EMC-con3A1.1	N/A

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2025.10.30
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	1911	2025.10.30
3	Preamplifier	Agilent	8449B	3008A01838	2025.10.30
4	Amplifier	HP	8447E	2945A02747	2025.10.30
5	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2025.10.30
6	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2025.10.30
7	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2025.10.30
8	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2025.10.30
9	EMI test Receiver	R&S	ESPI	100362	2025.10.30
10	MXA signal analyzer	Agilent	N9020A	MY52090073	2025.10.30
11	RE Test software	FALA	EZ-EMC	Ver. FA-03A2 RE	N/A

4. Measurement Uncertainty

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4 and ANSI C63.4.

Test	Parameters	Expanded Uncertainty (U_{Lab})	Expanded Uncertainty (U_{Cispr})
Conducted Emission	Level Accuracy: 150kHz to 30MHz	± 1.22 dB	± 3.6 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 3.67 dB	± 5.2 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.79 dB	N/A

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.1. Operating Condition of EUT

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode	Running

For Conducted Emission Test	
Final Test Mode	Description
Mode	Running

For Radiated Emission Test	
Final Test Mode	Description
Mode	Running

4.2. Test Conditions

Temperature: 15-25℃

Relative Humidity: 30-60 %

Atmospheric pressure: 800hPa-1060hPa

5. Conducted Emission

5.1.Limit

☒ Except for Class A devices:


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

☐ For Class A devices:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60

5.2.Test Setup

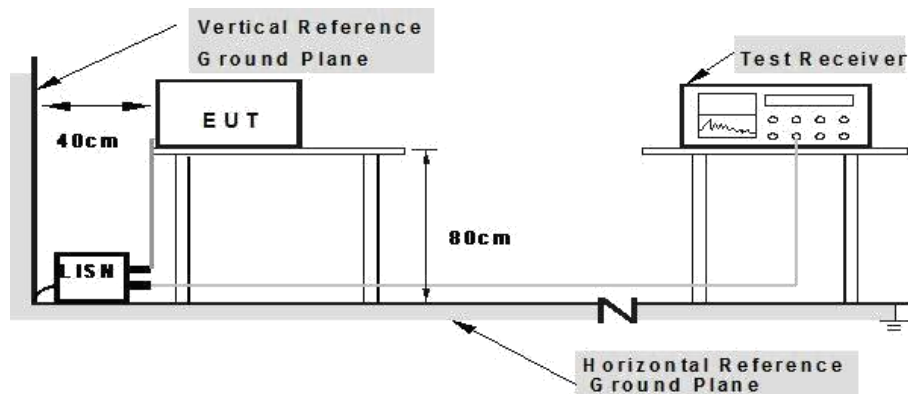

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The setup of EUT is according with ANSI C63.4 measurement procedure. Specification used with FCC Part 15 limits.

5.3.EMI Test Receiver Setup

Frequency Range	9kHz-30MHz
Resolution Bandwidth	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)

5.4. Test Procedure

Measurement was performed in shielded room, and instruments used were followed clause 4 of ANSI C63.4.

Detailed test procedure was following clause 7 of ANSI C63.4.


Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

5.5. Test Results

PASS

Please refer to the following page.


Polarization: L

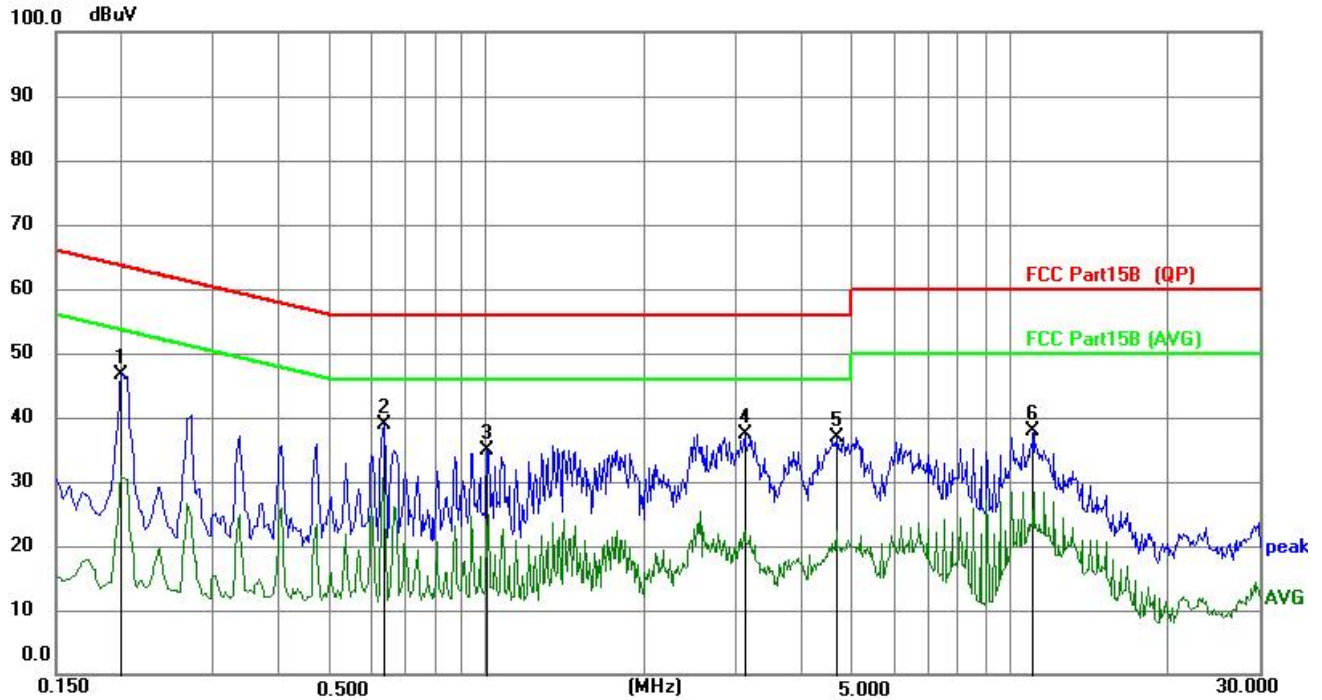

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1995	36.51	10.19	46.70	63.63	-16.93	peak
2		0.6360	28.69	10.22	38.91	56.00	-17.09	peak
3		1.0004	24.75	10.12	34.87	56.00	-21.13	peak
4		3.1154	27.10	10.24	37.34	56.00	-18.66	peak
5		4.6590	26.67	10.14	36.81	56.00	-19.19	peak
6		11.1254	27.61	10.23	37.84	60.00	-22.16	peak

Note: Result=Reading+Factor
Over Limit=Result-Limit

Polarization: N

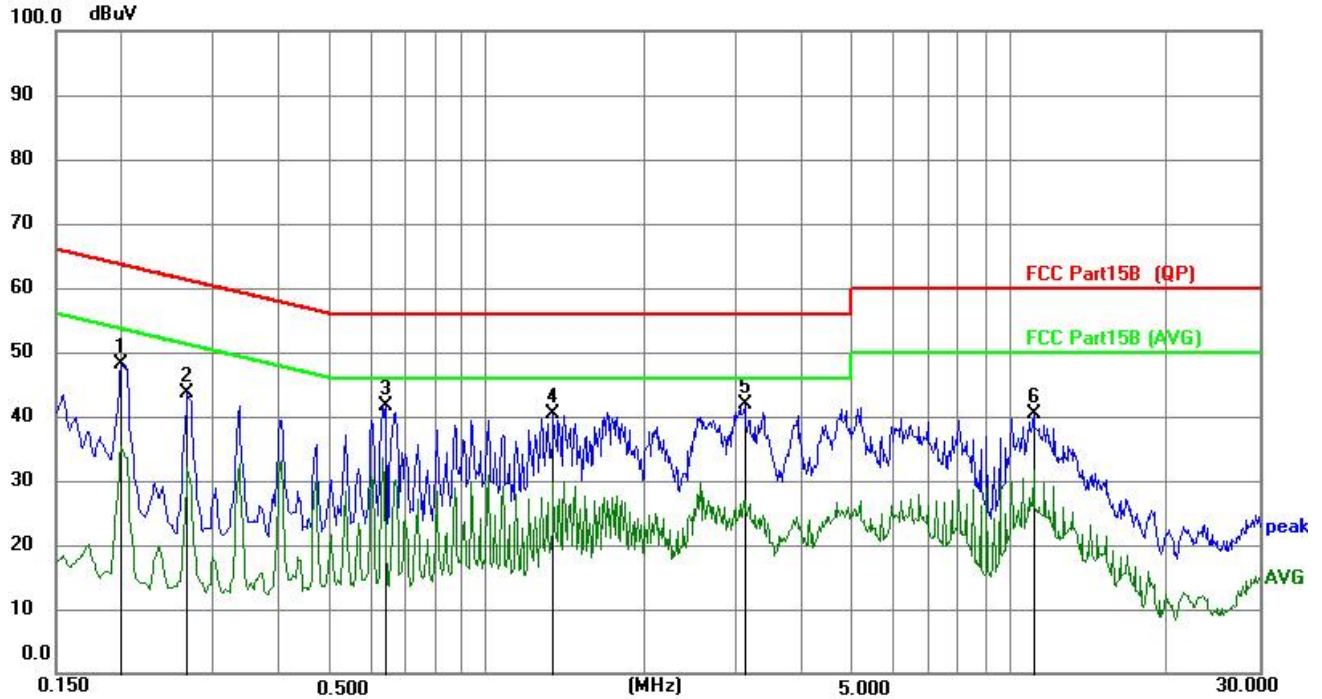

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1995	37.95	10.20	48.15	63.63	-15.48	peak
2		0.2670	33.44	10.20	43.64	61.21	-17.57	peak
3		0.6405	31.53	10.19	41.72	56.00	-14.28	peak
4		1.3380	30.26	10.21	40.47	56.00	-15.53	peak
5	*	3.1110	31.54	10.24	41.78	56.00	-14.22	peak
6		11.1165	29.93	10.38	40.31	60.00	-19.69	peak

Note: Result=Reading+Factor
Over Limit=Result-Limit

6. Radiated Emission

6.1.Limit

☒ Except for Class A devices (at 3m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

☐ For Class A devices (at 10m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	90	39
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

6.2.Test Setup

Radiated Emission Test Set-Up Frequency Below 1 GHz

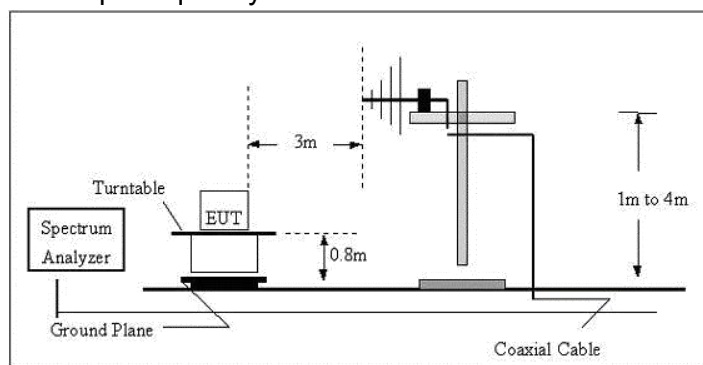

Radiated Emission Test Set-Up Frequency Above 1GHz

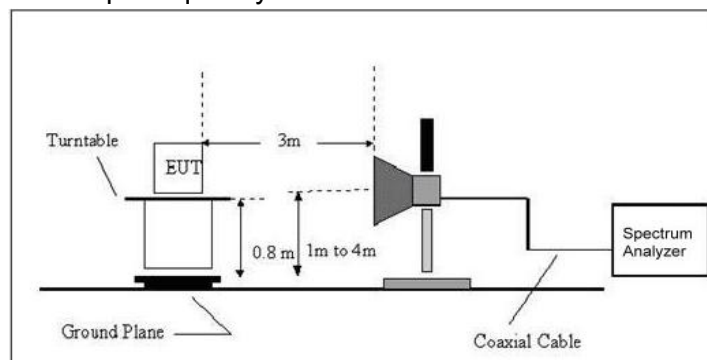

The radiated tests wer performed in 3 meter3 Charmber test site, using the setup accordance with the ANSI C63.4:2014.

EMI Test Receiver Setup and Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz-1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	3MHz	/	PK
	1MHz	10Hz	/	AVG

6.3. Test Procedure

The measurement was performed in a semi-anechoic chamber, and instruments used were followed clause 4 of ANSI C63.4.

Detailed test procedure was following clause 8 of ANSI C63.4.

6.4. Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

6.5. Test Results

PASS

Please refer to the following page.

Polarization: H

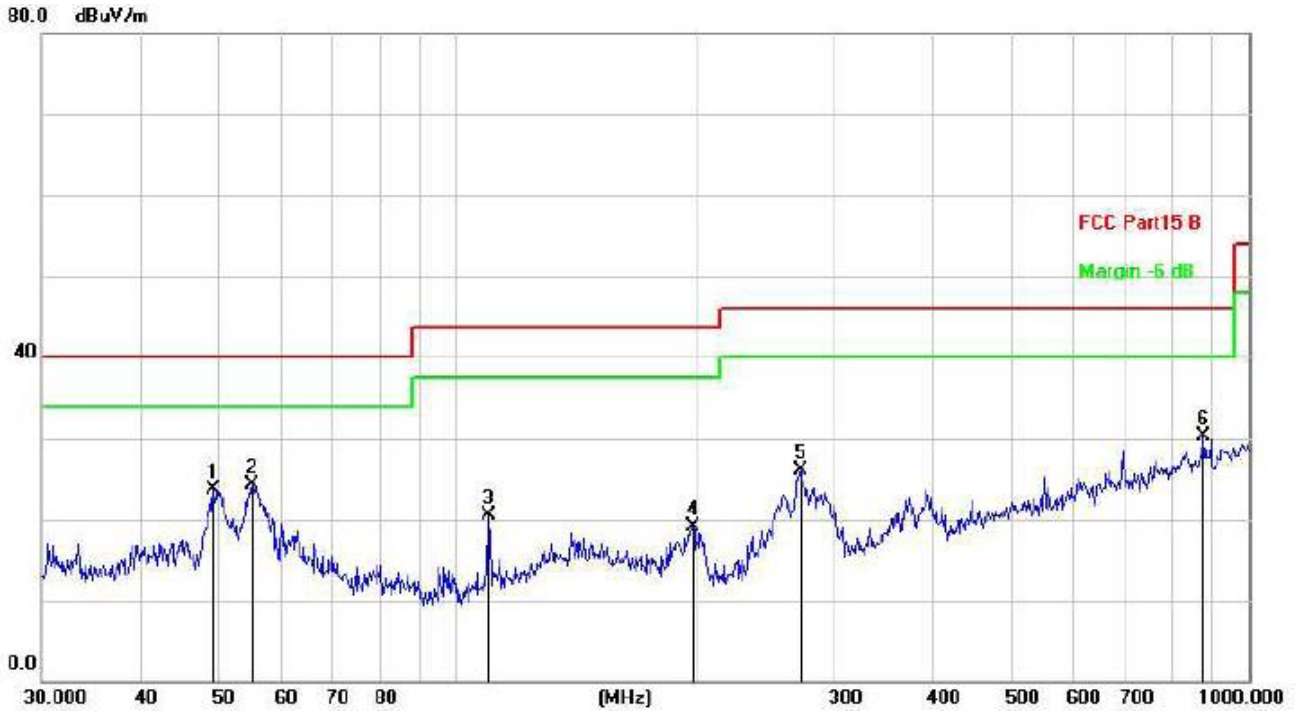

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		49.3594	35.07	-11.32	23.75	40.00	-16.25	peak
2	*	55.2207	36.16	-11.79	24.37	40.00	-15.63	peak
3		109.7960	34.37	-13.78	20.59	43.50	-22.91	peak
4		198.5879	33.15	-14.13	19.02	43.50	-24.48	peak
5		271.3245	36.93	-10.90	26.03	46.00	-19.97	peak
6		875.2469	29.47	0.75	30.22	46.00	-15.78	peak

Note: Result=Reading+Factor
Over Limit=Result-Limit

Polarization: V



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	50.2324	47.34	-11.32	36.02	40.00	-3.98	peak
2	!	55.6094	47.31	-11.90	35.41	40.00	-4.59	peak
3		96.7749	44.31	-15.26	29.05	43.50	-14.45	peak
4		134.0882	39.18	-10.87	28.31	43.50	-15.19	peak
5		263.8190	32.81	-11.12	21.69	46.00	-24.31	peak
6		922.5157	27.83	1.25	29.08	46.00	-16.92	peak

Note: Result=Reading+Factor
Over Limit=Result-Limit

7. Photographs of EUT

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



----- End of Report -----