



FitRight Solution - Custom Copper Piping Solutions

✉ info@fitrightsolution.com


🌐 www.fitrightsolution.com

☎ +86 575 88798750

📠 +86 13735568599

📍 Headquarters: 1331,Block C,Building 2,Baolong Plaza,Zhuji City
Zhejiang Province,China 311800

📍 Factory: Building 1,No. 386-3 Xueyuan Road,Diankou Town,Zhuji City
Zhejiang Province,China 311800

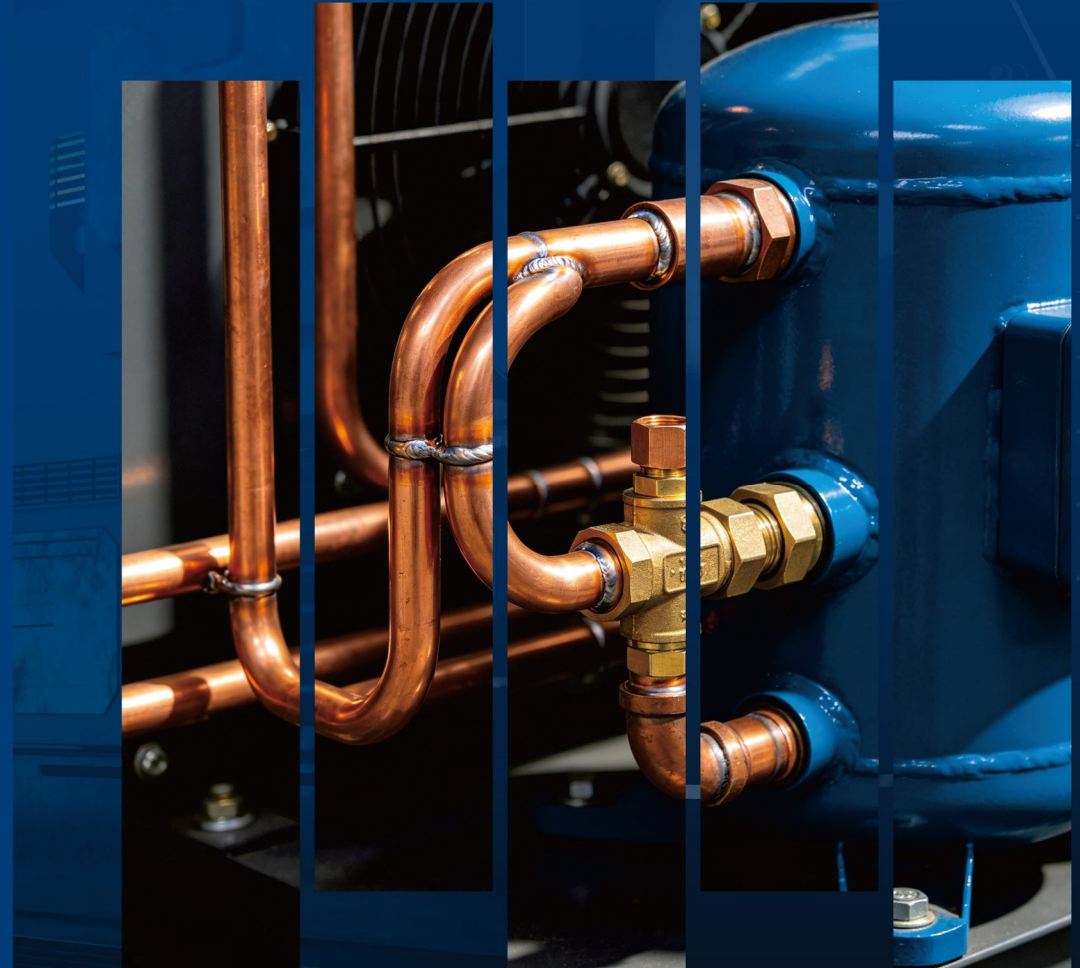

About Us

FitRight Solution - Custom Copper Piping Solutions

Facing homogeneous & highly substitutable ordinary spare parts market, we strategically launch FitRight Solution to focus on customized precision copper piping system for air conditioning, providing personalized drawing customization, size tailor-made, overall pipeline matching service.

FitRight Solution - Operated by JOYHOTOOL

Established in 2016, Over 10+ years of serving the global HVAC industry which is our registered trading entity for international trade, contracts, invoicing, logistics and after-sales settlement.
Custom Copper Pipe inquiry, sample, order → Brand: FitRight Solution, Contract signed under JOYHOTOOL


What stays the same

- The same team you've trusted since 2016
- The same commitment to quality and reliability
- The same manufacturing partner with daily on-site QC

What's new


- Focused custom engineering capabilities
 - Tailored solutions for your specific applications
 - We're excited to serve you better with a sharper focus.
- Follow us here for updates on our custom solutions!

The FitRight Solution Team

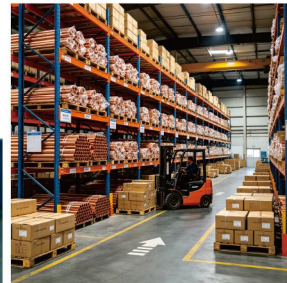

FitRight
Solution

Product Range

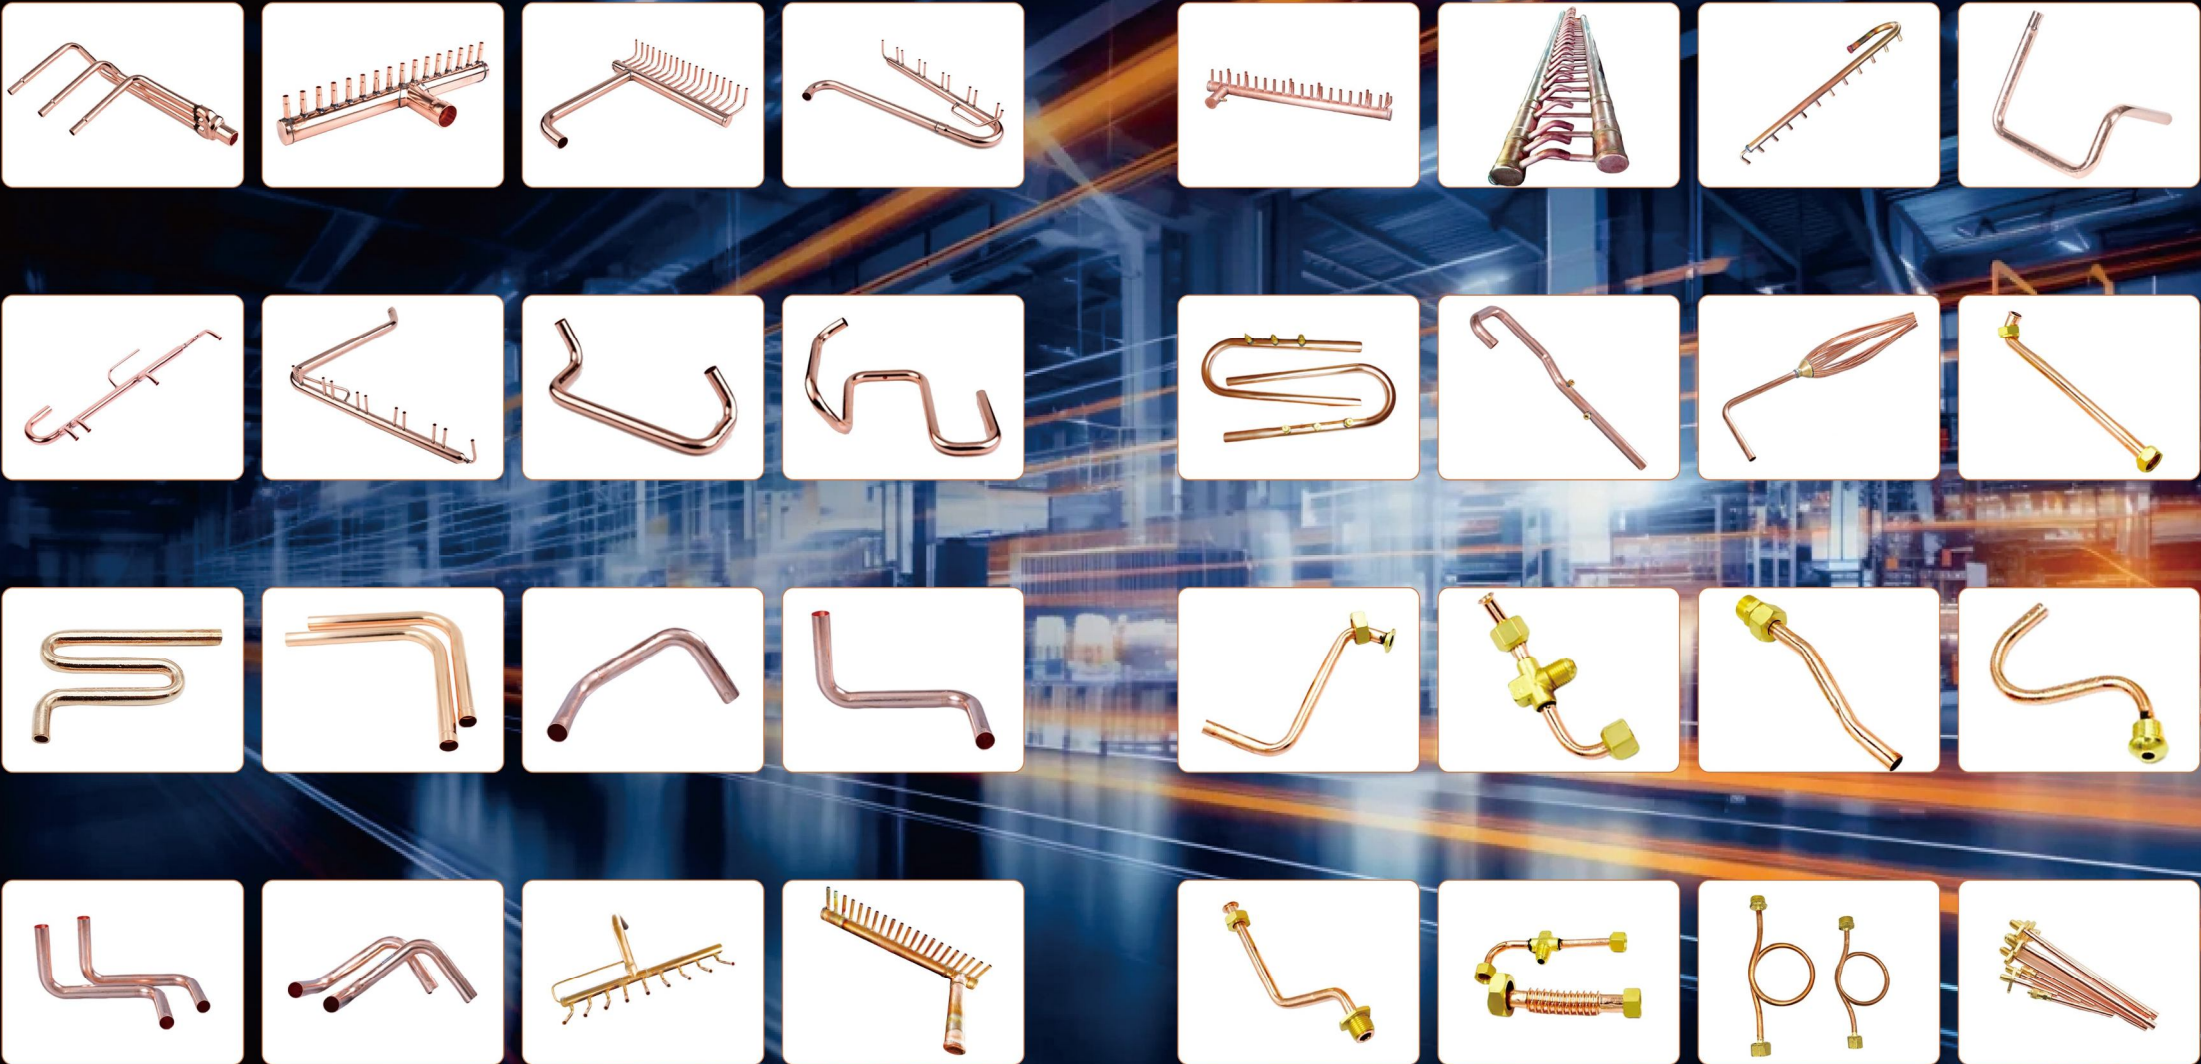



Application
Demonstration



Technical Specifications

Detailed technical data for professional specification and selection

Parameter	Specification
Material Grade	ASTM B88, ASTM B280, EN 12735
Diameter Range	1/4" (6.35mm) to 4" (101.6mm)
Wall Thickness	0.020" (0.51mm) to 0.150" (3.81mm)
Length Options	Standard 20ft, custom up to 40ft
Temper	Hard Drawn (H58), Annealed (O60)
Standards Compliance	ASTM, ASME, NSF, UL Listed
Working Pressure	Up to 1000 PSI (depending on size/temper)
Temperature Resistance Range	-320°F to 400°F (-195°C to 204°C)

Why Choose Us?

Traditional Sourcing



High MOQ from China



Straight pipes hard to transport



No small-batch cutting



Too many fitting SKUs



High inventory & labor cost

Our Solution



One-stop fitting solution



Custom bending & cutting



Ready-to-use assemblies



Save 5 major costs



Professional design support