



Size:120x120x38mm
Impeller material:Aluminum Alloy
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:60mm



FG120




PFG120



FK2120


ZL803&ZL150&
ZL804&ZL205 &
DS9803&DS5803



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air Volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF12385B11LM	DS12038ABHLM	110	0.22	50/60	39	ball	20	2550	148	87	wire	40	24kg	51*29.5*29
AF12385B11TM	DS12038ABHTM	110	0.22	50/60	39	ball	20	2550	148	87	terminal	40	24kg	51*29.5*29
AF12385B22LM	DS12038ABHLM	220	0.11	50/60	39	ball	20	2550	148	87	wire	40	24kg	51*29.5*29
AF12385B22TM	DS12038ABHTM	220	0.11	50/60	39	ball	20	2550	148	87	terminal	40	24kg	51*29.5*29
AF12385B38LM	DS12038ABHLM	380	0.06	50/60	39	ball	20	2550	148	87	wire	40	24kg	51*29.5*29
AF12385B38TM	DS12038ABHTM	380	0.06	50/60	39	ball	20	2550	148	87	terminal	40	24kg	51*29.5*29





Size: 172x150x55mm
Impeller material: Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:53mm



FG150-2

ZL804&ZL205&
ZL805&ZL256&
ZL806&ZL320&
DS9804&DS5804



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air Volume		WIRE/	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF170M11L	DS17055ABHLM	110	0.52	50	49	ball	37	2650	320	189	Wires/ Terminal	20	24kg	36*32*32
AF170M11L60	DS17055ABHLM		0.43	60	53		34	3000	380	224		20	24kg	36*32*32
AF170M22L	DS17055ABHLM	220V	0.25	50	49		37	2650	320	189		20	24kg	36*32*32
AF170M22L60	DS17055ABHLM		0.2	60	53		34	3000	380	224		20	24kg	36*32*32
AF170M38L	DS17055ABHLM	380V	0.15	50	49		37	2650	320	189		20	24kg	36*32*32
AF170M38L60	DS17055ABHLM		0.12	60	53		34	3000	380	224		20	24kg	36*32*32



Size:140x140x50mm
Impeller material : Metal
Frame: Aluminum Alloy
Motor: Shaded pole induction motor
Operation Temperature : -10°C~+100°C
Label diameter : 52mm



FG150




PFG150



FK2172


ZL804&ZL205 &
ZL805&ZL256&
DS9804&DS9804H

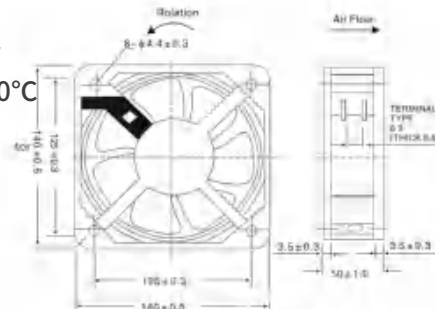

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air Volume		WIRE/	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF1450MB11L	DS14050ABHLM	110	0.52	50	49	ball	30	2550	320	189	Wires/ Terminal	20	22kgs	33*29*34
AF1450MB11L60	DS14050ABHLM	220	0.43	60	53		27	2800	380	224		20	22kgs	33*29*34
AF1450MB22L	DS14050ABHLM	380	0.25	50	49		30	2550	320	189		20	22kgs	33*29*34
AF1450MB22L60	DS14050ABHLM	220	0.2	60	53		27	2800	380	224		20	22kgs	33*29*34
AF1450MB38L	DS14050ABHLM	380	0.15	50	49		30	2550	320	189		20	22kgs	33*29*34
AF1450MB38L60	DS14050ABHLM	380	0.12	60	53		27	2800	380	224		20	22kgs	33*29*34



Size: 160x160x55mm
Impeller material: Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:48.5mm

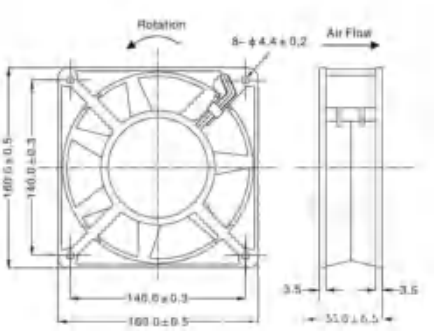

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air Volume		WIRE/	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF160M11L	DS16055ABHLM	110	0.52	50	49	ball	37	2650	320	189	Wires/ Terminal	20	25kg	36*32*32
AF160M11L60	DS16055ABHLM		0.43	60	53		34	3000	380	224		20	25kg	36*32*32
AF160M22L	DS16055ABHLM	220V	0.25	50	49		37	2650	320	189		20	25kg	36*32*32
AF160M22L60	DS16055ABHLM		0.2	60	53		34	3000	380	224		20	25kg	36*32*32
AF160M38L	DS16055ABHLM	380V	0.15	50	49		37	2650	320	189		20	25kg	36*32*32
AF160M38L60	DS16055ABHLM		0.12	60	53		34	3000	380	224		20	25kg	36*32*32



Size:180x180x60mm

Impeller material : Metal

Frame: Aluminum Alloy

Motor: Shaded pole induction motor

Operation Temperature : -10°C~+100°C

Label diameter : 65mm



FG180




PFG200



FK2200



ZL&805&ZL256&
DS9805&DS9806&
DS9805H&DS9806H

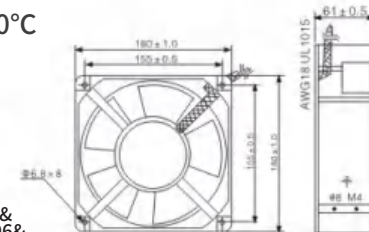

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF1860MB11L	DS18606ABHLM	110	0.7	50	60	ball	60	2650	618	363	wire	10	20kgs	40*21*37
AF1860MB22L	DS18606ABHLM	220	0.375	50	60	ball	60	2650	618	363	Wire	20	20kgs	40*21*37
AF1860MB38L	DS18606ABHLM	380	0.215	50	60	ball	60	2650	618	363	wire	20	20kgs	40*21*37



Size:200x200x60mm

Impeller material : Metal

Frame: Aluminum Alloy

Motor: Shaded pole induction motor

Operation Temperature : -10°C~+100°C

Label diameter : 65mm



FG200




PFG200



FK2200



ZL&805&ZL256&
ZL806&DS9805&
DS9806&DS9805H
&DS9806H

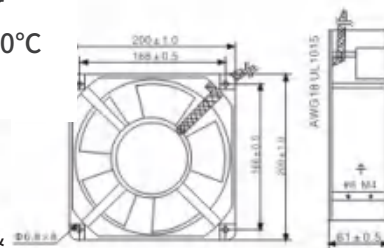

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air Volume		WIRE/ TERMINAL	Packing		
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF2060MB11L	DS20600ABHLM	110	0.78	50	65	ball	65	2550	680	400	Wire	10	21kgs	47*24*47.2
AF2060MB22L	DS20600ABHLM	220	0.4	50	65	ball	65	2550	680	400		10	21kgs	47*24*47.2
AF2060MB38L	DS20600ABHLM	380	0.24	50	65	ball	65	2550	680	400		10	21kgs	47*24*47.2



Size: 254x254x89mm


Impeller material: Metal

Frame: Aluminum Alloy

Motor:shaded pole induction motor

Operation temperature:-10°C~+100°C

Label diameter:70mm

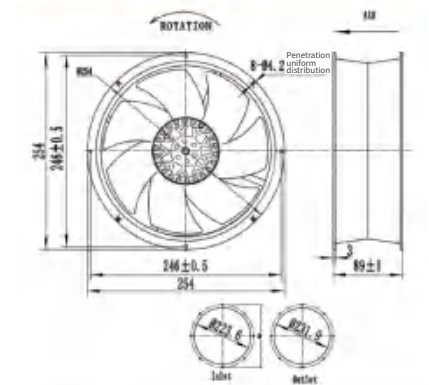

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air Volume		Connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF25489M11L	DS25489ABHLM	110	0.68	50	69	ball	105	2520	1150	676	Wire	5	14kg	54.5*33*36
AF25489M11L60	DS25489ABHLM	110	0.68	60	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M22L	DS25489ABHLM	220	0.54	50	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M22L60	DS25489ABHLM	220	0.5	60	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M38L	DS25489ABHLM	380	0.23	50	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M38L60	DS25489ABHLM	380	0.23	60	69		105	2520	1150	676		5	14kg	54.5*33*36