









Size:80x80x25mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter: 55mm
Fan accessories

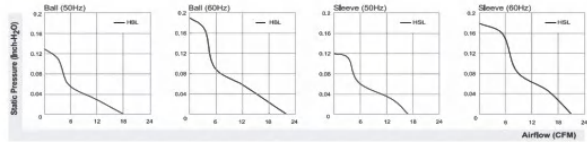

Factory Code	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF825S11L	DS8025ASHL	110	0.14	50/60	30	sleeve	14	2500	30	18	wire	80	16kg	40*40*20
AF825B11L	DS8025ABHL	110	0.14	50/60	30	ball	14	2550	32	19	wire	80	16kg	40*40*20
AF825S11T	DS8025ASHT	110	0.14	50/60	30	sleeve	14	2500	30	18	terminal	80	16kg	40*40*20
AF825B11T	DS8025ABHT	110	0.14	50/60	30	ball	14	2550	32	19	terminal	80	16kg	40*40*20
AF825S22L	DS8025ASHL	220	0.09	50/60	30	sleeve	16	2500	30	18	wire	80	16kg	40*40*20
AF825B22L	DS8025ABHL	220	0.09	50/60	30	ball	16	2550	32	19	wire	80	16kg	40*40*20
AF825S22T	DS8025ASHT	220	0.09	50/60	30	sleeve	16	2500	30	18	terminal	80	16kg	40*40*20
AF825B22T	DS8025ABHT	220	0.09	50/60	30	ball	16	2550	32	19	terminal	80	16kg	40*40*20
AF825SBIVL	DS8025ASHL	110&220	0.09/0.14	50/60	30	sleeve	16	2500	30	18	wire	80	16kg	40*40*20
AF8252BIVL	DS8025ABHL	110&220	0.09/0.14	50/60	30	ball	16	2550	32	19	wire	80	16kg	40*40*20





Size:80x80x38mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:45mm
Fan accessories

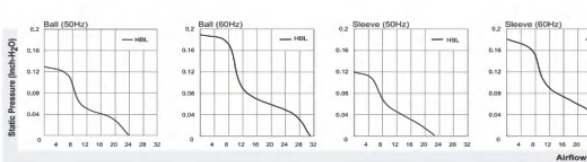

Factory Code	Model	Voltage	Current	Freq	Noise	Bearing	Power		Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF838S11L	DS8038ASHL	110	0.14	50/60	32	sleeve	14	2550	40	30	wire	60	16kg	40*40*20
AF838B11L	DS8038ABHL	110	0.14	50/60	32	ball	14	2600	42	31	wire	60	16kg	40*40*20
AF838S11T	DS8038ASHT	110	0.14	50/60	32	sleeve	14	2550	40	30	terminal	60	16kg	40*40*20
AF838B11T	DS8038ABHT	110	0.14	50/60	32	ball	14	2600	42	31	terminal	60	16kg	40*40*20
AF838S22L	DS8038ASHL	220	0.09	50/60	32	sleeve	17	2550	40	30	wire	60	16kg	40*40*20
AF838B22L	DS8038ABHL	220	0.09	50/60	32	ball	17	2600	42	31	wire	60	16kg	40*40*20
AF838S22T	DS8038ASHT	220	0.09	50/60	32	sleeve	17	2550	40	30	terminal	60	16kg	40*40*20
AF838B22T	DS8038ABHT	220	0.09	50/60	32	ball	17	2600	42	31	terminal	60	16kg	40*40*20
AF838SBIVL	DS8038ASHL	110&220	0.09/0.14	50/60	32	sleeve	17	2550	40	30	wire	60	16kg	40*40*20
AF8382BIVL	DS8038ABHL	110&220	0.09/0.14	50/60	32	ball	17	2600	42	31	wire	60	16kg	40*40*20





Size:92x92x25mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter: 55mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF925S11L	DS9225ASHL	110	0.14	50/60	32	sleeve	13	2500	58	35	wire	80	23kg	46*40*22
AF925B11L	DS9225ABHL	110	0.14	50/60	32	ball	14	2550	59	36		80	23kg	46*40*22
AF925S11T	DS9225ASHT	110	0.14	50/60	32	sleeve	13	2500	58	35	terminal	80	23kg	46*40*22
AF925B11T	DS9225ABHT	110	0.14	50/60	32	ball	14	2550	59	36		80	23kg	46*40*22
AF925S22L	DS9225ASHL	220	0.09	0	32	sleeve	13	2500	58	35	wire	80	23kg	46*40*22
AF925B22L	DS9225ABHL	220	0.09	50/60	32	ball	14	2550	59	36		80	23kg	46*40*22
AF925S22T	DS9225ASHT	220	0.09	50/60	32	sleeve	13	2500	58	35	terminal	80	23kg	46*40*22
AF925B22T	DS9225ABHT	220	0.09	50/60	32	ball	14	2550	59	36		80	23kg	46*40*22
AF925SBIVL	DS9225ASHL	110&220	0.09/0.14	50/60	32	sleeve	13	2500	58	35	wire	80	23kg	46*40*22
AF9252BIVL	DS9225ABHL	110&220	0.09/0.14	50/60	32	ball	14	2550	59	36		80	23kg	46*40*22





Size:92x92x38mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:45mm

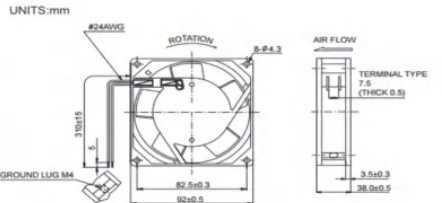

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power		Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF938S11L	DS9238ASHL	110	0.14	50/60	32	sleeve	15	2550	77	46	wire	60	23kg	46*40*22
AF938B11L	DS9238ABHL	110	0.14	50/60	32	ball	15	2600	79	47		60	23kg	46*40*22
AF938S11T	DS9238ASHT	110	0.14	50/60	32	sleeve	15	2550	77	46	terminal	60	23kg	46*40*22
AF938B11T	DS9238ABHT	110	0.14	50/60	32	ball	15	2600	79	47		60	23kg	46*40*22
AF938S22L	DS9238ASHL	220	0.09	50/60	32	sleeve	15	2550	77	46	wire	60	23kg	46*40*22
AF938B22L	DS9238ABHL	220	0.09	50/60	32	ball	15	2600	79	47		60	23kg	46*40*22
AF938S22T	DS9238ASHT	220	0.09	50/60	32	sleeve	15	2550	77	46	terminal	60	23kg	46*40*22
AF938B22T	DS9238ABHT	220	0.09	50/60	32	ball	15	2600	79	47		60	23kg	46*40*22
AF938SBIVL	DS9238ASHL	110&220	0.09/0.14	50/60	32	sleeve	16	2550	77	46	wire	60	23kg	46*40*22
AF9382BIVL	DS9238ABHL	110&220	0.09/0.14	50/60	32	ball	16	2600	79	47		60	23kg	46*40*22





Size:110x110x25mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:57mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	CFM		pcs/ctn	weight	dimension
AF1125S11L	DS11025ASHL	110	0.16	50/60	32	sleeve	14	2500	78	47	wire	80	20kg	53*40*26
AF1125B11L	DS11025ABHL	110	0.16	50/60	32	ball	15	2550	80	48		80	20kg	53*40*26
AF1125S11T	DS11025ASHT	110	0.16	50/60	32	sleeve	14	2500	78	47	terminal	80	20kg	53*40*26
AF1125B11T	DS11025ABHT	110	0.16	50/60	32	ball	15	2550	80	48		80	20kg	53*40*26
AF1125S22L	DS11025ASHL	220	0.08	50/60	32	sleeve	14	2500	78	47	wire	80	20kg	53*40*26
AF1125B22L	DS11025ABHL	220	0.08	50/60	32	ball	15	2550	80	48		80	20kg	53*40*26
AF1125S22T	DS11025ASHT	220	0.08	50/60	32	sleeve	14	2500	78	47	terminal	80	20kg	53*40*26
AF1125B22T	DS11025ABHT	220	0.08	50/60	32	ball	15	2550	80	48		80	20kg	53*40*26
AF1125SBIVL	DS11025ASHL	110&220	0.08/0.16	50/60	32	sleeve	14	2500	78	47	wire	80	20kg	53*40*26
AF1125BIVL	DS11025ABHL	110&220	0.08/0.16	50/60	32	ball	15	2550	80	48		80	20kg	53*40*26





Size:120x120x25mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter: 57mm

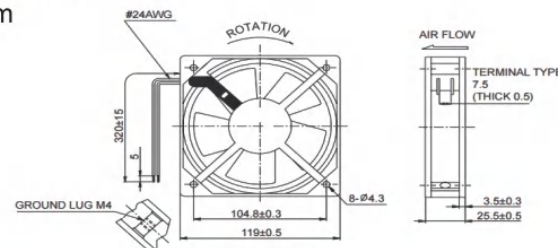

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power		Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	CFM		pcs/ctn	weight	dimension
AF1225S11L	DS12025ASHL	110	0.16	50/60	32	sleeve	15	2550	85	50	wire	60	21kg	44*40*28
AF1225B11L	DS12025ABHL	110	0.16	50/60	32	ball	15	2600	90	53		60	21kg	44*40*28
AF1225S11T	DS12025ASHT	110	0.16	50/60	32	sleeve	15	2550	85	50	terminal	60	21kg	44*40*28
AF1225B11T	DS12025ABHT	110	0.16	50/60	32	ball	15	2600	90	53		60	21kg	44*40*28
AF1225S22L	DS12025ASHL	220	0.08	50/60	32	sleeve	15	2550	85	50	wire	60	21kg	44*40*28
AF1225B22L	DS12025ABHL	220	0.08	50/60	32	ball	15	2600	90	53		60	21kg	44*40*28
AF1225S22T	DS12025ASHT	220	0.08	50/60	32	sleeve	15	2550	85	50	terminal	60	21kg	44*40*28
AF1225B22T	DS12025ABHT	220	0.08	50/60	32	ball	15	2600	90	53		60	21kg	44*40*28
AF1225SBIVL	DS12025ASHL	110&220	0.08/0.16	50/60	32	sleeve	16	2550	85	50	wire	60	21kg	44*40*28
AF1225SBIVL	DS12025ABHL	110&220	0.08/0.16	50/60	32	ball	16	2600	90	53		60	21kg	44*40*28





Size:120x120x38mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter: 60mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	CFM		pcs/ctn	weight	dimension
AF12385S11L	DS12038ASHL	110	0.22	50/60	39	sleeve	19	2500	138	81	wire	40	19kg	51*29.5*29
AF12385B11L	DS12038ABHL	110	0.22	50/60	39	ball	20	2550	148	87		40	19kg	51*29.5*29
AF12385S11T	DS12038ASHT	110	0.22	50/60	39	sleeve	19	2500	138	81	terminal	40	19kg	51*29.5*29
AF1238511T	DS12038ABHT	110	0.22	50/60	39	ball	20	2550	148	87		40	19kg	51*29.5*29
AF12385S22L	DS12038ASHL	220	0.11	50/60	39	sleeve	19	2500	138	81	wire	40	19kg	51*29.5*29
AF12385B22L	DS12038ABHL	220	0.11	50/60	39	ball	20	2550	148	87		40	19kg	51*29.5*29
AF12385S22T	DS12038ASHT	220	0.11	50/60	39	sleeve	19	2500	138	81	terminal	40	19kg	51*29.5*29
AF12385B22T	DS12038ABHT	220	0.11	50/60	39	ball	20	2550	148	87		40	19kg	51*29.5*29
AF12385S38L	DS12038ASHL	380	0.06	50/60	39	sleeve	19	2500	138	81	wire	40	19kg	51*29.5*29
AF12385B38L	DS12038ABHL	380	0.06	50/60	39	ball	20	2550	148	87		40	19kg	51*29.5*29
AF12385SBVL	DS12038ASHL	110&220	0.11/0.22	50/60	39	sleeve	19	2500	138	81		40	19kg	51*29.5*29
AF123852BVL	DS12038ABHL	110&220	0.11/0.22	50/60	39	ball	20	2550	148	87		40	19kg	51*29.5*29




Size:120x120x38mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter: 45mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	CFM		pcs/ctn	weight	dimension
AF12387S11L	DS12038ASHL	110	0.24	50/60	43	sleeve	21	2580	160	94	wire	40	22kg	46*28*28
AF12387B11L	DS12038ABHL	110	0.24	50/60	43	ball	22	2700	172	102		40	22kg	46*28*28
AF12387S11T	DS12038ASHT	110	0.24	50/60	43	sleeve	21	2580	160	94	terminal	40	22kg	46*28*28
AF1238711T	DS12038ABHT	110	0.24	50/60	43	ball	22	2700	172	102		40	22kg	46*28*28
AF12387S22L	DS12038ASHL	220	0.12	50/60	43	sleeve	21	2580	160	94	wire	40	22kg	46*28*28
AF12387B22L	DS12038ABHL	220	0.12	50/60	43	ball	22	2700	172	102		40	22kg	46*28*28
AF12387S22T	DS12038ASHT	220	0.12	50/60	43	sleeve	21	2580	160	94	terminal	40	22kg	46*28*28
AF12387B22T	DS12038ABHT	220	0.12	50/60	43	ball	22	2700	172	102		40	22kg	46*28*28
AF12387S38L	DS12038ASHL	380	0.07	50/60	43	sleeve	21	2580	160	94	wire	40	22kg	46*28*28
AF12387B38L	DS12038ABHL	380	0.07	50/60	43	ball	22	2700	172	102		40	22kg	46*28*28
AF12387SBVL	DS12038ASHL	110&220	0.12/0.24	50/60	43	sleeve	21	2580	160	94		40	22kg	46*28*28
AF123872BVL	DS12038ABHL	110&220	0.12/0.24	50/60	43	ball	22	2700	172	102		40	22kg	46*28*28





Size:135x135x32mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:45mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF13532S11L	125FZY1-S	110	0.28	50/60	45	sleeve	25	2500	168	98	wire	40	24kg	37*29.5*30
AF13532B11L	125FZY1-S	110	0.28	50/60	45	ball	25	2550	180	105		40	24kg	37*29.5*30
AF13532S22L	125FZY2-S	220	0.14	50/60	45	sleeve	25	2500	168	98		40	24kg	37*29.5*30
AF13532B22L	125FZY2-S	220	0.14	50/60	45	ball	25	2550	180	105		40	24kg	37*29.5*30
AF13532S38L	125FZY4-S	380	0.08	50/60	45	sleeve	25	2500	168	98		40	24kg	37*29.5*30
AF13532B38L	125FZY4-S	380	0.08	50/60	45	ball	25	2550	180	105		40	24kg	37*29.5*30





Size:172x150x38mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:45mm

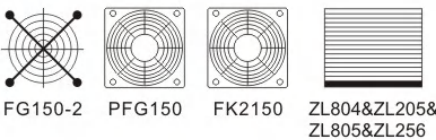

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF17238B11L	145FZY1-S	110	0.36	50/60	52	sleeve	30w	2500	312	183	wire	20	18kg	37*33*26.5
AF17238B11T	145FZY1-S	110	0.36	50/60	52	ball	30w	2550	320	188	terminal	20	18kg	37*33*26.5
AF17238B22L	145FZY2-S	220	0.18	50/60	52	sleeve	30w	2500	312	183	wire	20	18kg	37*33*26.5
AF17238B22T	145FZY2-S	220	0.18	50/60	52	ball	30w	2550	320	188	terminal	20	18kg	37*33*26.5
AF17238B38L	145FZY4-S	380	0.1	50/60	52	sleeve	30w	2500	312	183	wire	20	18kg	37*33*26.5
AF17238B38T	145FZY4-S	380	0.1	50/60	52	ball	30w	2550	320	188	terminal	20	18kg	37*33*26.5





Size:172x150x51mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:53mm

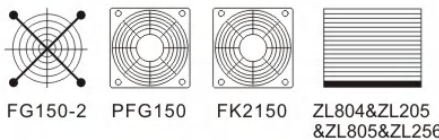

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF1725S11L	DS15052ASHL	110	0.4	50/60	50	sleeve	26w	2500	298	175	wire	20	18kg	37.5*33*31
AF1725B11L	DS15052ABHL	110	0.4	50/60	50	ball	26w	2650	330	194		20	18kg	37.5*33*31
AF1725S11T	DS15052ASHT	110	0.4	50/60	50	sleeve	26w	2500	298	175	terminal	20	18kg	37.5*33*31
AF1725B11T	DS15052ABHT	110	0.4	50/60	50	ball	26w	2650	330	194		20	18kg	37.5*33*31
AF1725S22L	DS15052ASHL	220	0.2	50/60	50	sleeve	26w	2500	298	175	wire	20	18kg	37.5*33*31
AF1725B22L	DS15052ABHL	220	0.2	50/60	50	ball	26w	2650	330	194		20	18kg	37.5*33*31
AF1725S22T	DS15052ASHT	220	0.2	50/60	50	sleeve	26w	2500	298	175	terminal	20	18kg	37.5*33*31
AF1725B22T	DS15052ABHT	220	0.2	50/60	50	ball	26w	2650	330	194		20	18kg	37.5*33*31
AF1725S38L	DS15052ASHL	380	0.12	50/60	50	sleeve	26w	2500	298	175	wire	20	18kg	37.5*33*31
AF1725B38L	DS15052ABHL	380	0.12	50/60	50	ball	26w	2650	330	194		20	18kg	37.5*33*31
AF1725S38T	DS15052ASHT	380	0.12	50/60	50	sleeve	26w	2500	298	175	terminal	20	18kg	37.5*33*31
AF1725B38T	DS15052ABHT	380	0.12	50/60	50	ball	26w	2650	330	194		20	18kg	37.5*33*31





Size:150x150x51mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:53mm

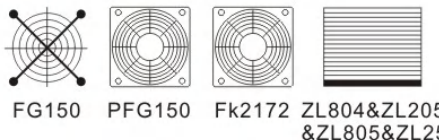

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF1551S11L	DS15051ASHL	110	0.4	50/60	50	sleeve	25	2500	298	175	wire	20	18kg	33*29*33.5
AF1551B11L	DS15051ABHL	110	0.4	50/60	50	ball	30	2650	330	194		20	18kg	33*29*33.5
AF1551S11T	DS15051ASHT	110	0.4	50/60	50	sleeve	25	2500	298	175	terminal	20	18kg	33*29*33.5
AF1551B11T	DS15051ABHT	110	0.4	50/60	50	ball	30	2650	330	194		20	18kg	33*29*33.5
AF1551S22L	DS15051ASHL	220	0.2	50/60	50	sleeve	25	2500	298	175	wire	20	18kg	33*29*33.5
AF1551B22L	DS15051ABHL	220	0.2	50/60	50	ball	30	2650	330	194		20	18kg	33*29*33.5
AF1551S22T	DS15051ASHT	220	0.2	50/60	50	sleeve	25	2500	298	175	terminal	20	18kg	33*29*33.5
AF1551B22T	DS15051ABHT	220	0.2	50/60	50	ball	30	2650	330	194		20	18kg	33*29*33.5
AF1551S38L	DS15051ASHL	380	0.12	50/60	50	sleeve	25	2500	298	175	wire	20	18kg	33*29*33.5
AF1551B38L	DS15051ABHL	380	0.12	50/60	50	ball	30	2650	330	194		20	18kg	33*29*33.5
AF1551S38T	DS15051ASHT	380	0.12	50/60	50	sleeve	25	2500	298	175	terminal	20	18kg	33*29*33.5
AF1551B38T	DS15051ABHT	380	0.12	50/60	50	ball	30	2650	330	194		20	18kg	33*29*33.5





Size:172x172x51mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:53mm

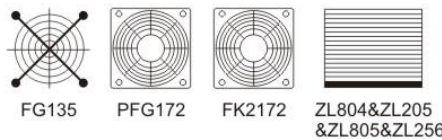

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF172RS11L	DS1752ASHL	110	0.4	50/60	50	sleeve	25	2500	298	175	wire	20	17kg	38*37*31
AF172RB11L	DS1752ABHL	110	0.4	50/60	50	ball	30	2650	330	194		20	17kg	38*37*31
AF172RS11T	DS1752ASHT	110	0.4	50/60	50	sleeve	25	2500	298	175	terminal	20	17kg	38*37*31
AF172RB11T	DS1752ABHT	110	0.4	50/60	50	ball	30	2650	330	194		20	17kg	38*37*31
AF172RS22L	DS1752ASHL	220	0.2	50/60	50	sleeve	25	2500	298	175	wire	20	17kg	38*37*31
AF172RB22L	DS1752ABHL	220	0.2	50/60	50	ball	30	2650	330	194		20	17kg	38*37*31
AF172RS22T	DS1752ASHT	220	0.2	50/60	50	sleeve	25	2500	298	175	terminal	20	17kg	38*37*31
AF172RB22T	DS1752ABHT	220	0.2	50/60	50	ball	30	2650	330	194		20	17kg	38*37*31
AF172RS38L	DS1752ASHL	380	0.12	50/60	50	sleeve	25	2500	298	175	wire	20	17kg	38*37*31
AF172RB38L	DS1752ABHL	380	0.12	50/60	50	ball	30	2650	330	194		20	17kg	38*37*31
AF172RS38T	DS1752ASHT	380	0.12	50/60	50	sleeve	25	2500	298	175	terminal	20	17kg	38*37*31
AF172RB38T	DS1752ABHT	380	0.12	50/60	50	ball	30	2650	330	194		20	17kg	38*37*31





Size:180x180x60mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:65mm

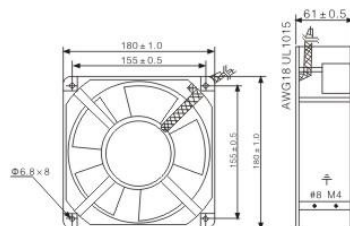

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF1860B11L	DS18060ABHL	110	0.7	50	60	ball	60	2650	618	363	WIRE	10	17kg	40*21*37
AF1860B22L	DS18060ABHL	220	0.375	50	60	ball	60	2650	618	363	WIRE	10	17kg	40*21*37
AF1860B38L	DS18060ABHL	380	0.215	50	60	ball	60	2650	618	363	WIRE	10	17kg	40*21*37





Size:200x200x60mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:65mm

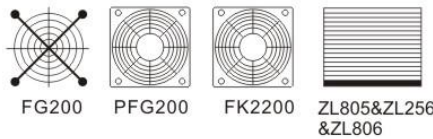

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF2060B11L	DS20060ABHL	110	0.78	50	65	ball	65	2550	680	400	WIRE	10	18kg	47*24*47.2
AF2060B22L	DS20060ABHL	220	0.4	50	65	ball	65	2550	680	400	WIRE	10	18kg	47*24*47.2
AF2060B38L	DS20060ABHL	380	0.24	50	65	ball	65	2550	680	400	WIRE	10	18kg	47*24*47.2





Size:220x220x60mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:70mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF2260B11L	DS22060ABHL	110	0.6	50	60	ball	50	2450	509	509	WIRE	10	21kg	50*48*26
AF2260B22L	DS22060ABHL	220	0.33	50	60	ball	50	2450	509	509	WIRE	10	21kg	50*48*26
AF2260B38L	DS22060ABHL	380	0.2	50	60	ball	50	2450	509	509	WIRE	10	21kg	50*48*26




Size:230x230x65mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:70mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power		Air volume		connector
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	CFM	
AF2365B11L	DS23065ABHL	110	0.78	50	65	ball	65	2500	476	280	WIRE
AF2365B22L	DS23065ABHL	220	0.4	50	65	ball	65	2500	476	280	WIRE
AF2365B38L	DS23065ABHL	380	0.24	50	65	ball	65	2500	476	280	WIRE





Size:107x100x30mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10 65
Label diameter:45mm

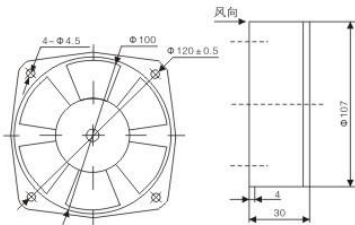

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power		Air volume		connector
		(V)	(A)	(HZ)	(Db)		(Watt)	(r/min)	(m3/h)	CFM	
AF100FS11L	100FZY1-D	110	0.14	50/60	32	sleeve	23w	2500	78	47	WIRE
AF100FS22L	100FZY2-D	220	0.07	50/60	32	sleeve	23w	2500	78	47	WIRE




Size:160x160x60mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:65*30mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	CFM		pcs/ctn	weight	dimension
AF15F11L	150FZY1-D	110	0.25	50/60	62	Ball bearing	30	2550	340	200	wire	20	17kg	34.5*34.5*35
AF15F22L	150FZY2-D	220	0.137	50/60	62		30	2550	340	200		20	17kg	34.5*34.5*35
AF15F38L	150FZY4-D	380 three phase	0.137	50	62		30	2550	340	200		20	17kg	34.5*34.5*35
AF15F387L	150FZY7-D	380 single phase	0.09	50	32		30	2550	340	200		20	17kg	34.5*34.5*35






Size:210*210*70mm
Impeller material:PBT thermoplastic black UL94-V
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃
Label diameter:44mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	CFM		pcs/ctn	weight	dimension
AF20F11L	200FZY1-D	110	0.4	50/60	67	Ball bearing	65	2550	790	465	WIRE	10	15kg	45.5*23*42
AF20F22L	200FZY2-D	220	0.2	50	67		65	2550	790	465		10	15kg	45.5*23*42
AF20F22L6H	200FZY2-D	220	0.17	60	65		60	2450	750	440		10	15kg	45.5*23*42
AF20F38L4	200FZY4-D	380 three phase	0.1	50	67		65	2550	790	465		10	15kg	45.5*23*42
AF20F38L7	200FZY7-D	380 single phase	0.1	50	67		65	2550	790	465		10	15kg	45.5*23*42





Size: 172x150x55mm
Impeller material: Metal
Frame: Aluminum Alloy
Motor: shaded pole induction motor
Operation temperature: -10°C~+80°C
Label diameter: 53mm



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF160M11L	DS17055ABHLM	110	0.52	50	49	ball	37	2650	320	189		10	24kg	
AF160M11L60	DS17055ABHLM		0.43	60	53		34	3000	380	224		10	24kg	
AF160M22L	DS17055ABHLM	220V	0.25	50	49		37	2650	320	189		10	24kg	
AF160M22L60	DS17055ABHLM		0.2	60	53		34	3000	380	224		10	24kg	
AF160M38L	DS17055ABHLM	380V	0.15	50	49		37	2650	320	189		10	24kg	
AF160M38L60	DS17055ABHLM		0.12	60	53		34	3000	380	224		10	24kg	




Size: 225x225x80mm
Impeller material: Metal
Frame: Aluminum Alloy
Motor: shaded pole induction motor
Operation temperature: -10°C~+65°C
Label diameter: 70mm

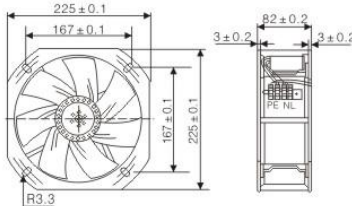

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF225F9L11	DS22580ABHL	110	0.68	50	69	ball	105	2520	1150	676	WIRE	10	24kg	51*26.5*56
AF225F911F60	DS22580ABHL	110	0.68	60	69	ball	105	2520	1150	676		10	24kg	51*26.5*56
AF225F9L22	DS22580ABHL	220	0.54	50	69	ball	105	2520	1150	676		10	24kg	51*26.5*56
AF225F922F60	DS22580ABHL	220	0.5	60	69	ball	105	2520	1150	676		10	24kg	51*26.5*56
AF225F9L38	DS22580ABHL	380	0.23	50	69	ball	105	2520	1150	676		10	24kg	51*26.5*56
												10	24kg	51*26.5*56





Size: 225x225x80mm
Impeller material: Metal
Frame: Aluminum Alloy
Motor: shaded pole induction motor
Operation temperature: -10~65
Label diameter: 70mm

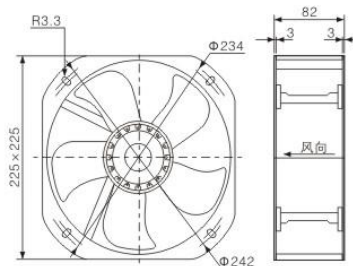

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF225F11L	200FZY1-S	110	0.7	50	75	ball	80	2400	1200	705	WIRE	10	24kg	51*26.5*56
AF225F11L60F	200FZY1-S		1.04	60	75	ball	105	2400	1200	705		10	24kg	51*26.5*56
AF225F22L	200FZY2-S	220	0.18	50	65	ball	40	1250	720	425		10	24kg	51*26.5*56
AF225F22LH6	200FZY6-S		0.54	50	75	ball	110	2500	1300	764		10	24kg	51*26.5*56
AF225F22H6F6	200FZY6-S	380 three phase	0.5	60	75	ball	105	2600	1300	764		10	24kg	51*26.5*56
AF225F38L3	200FZY3-S		0.1	50	75	ball	40	1250	720	425		10	24kg	51*26.5*56
AF225F38L4	200FZY4-S		0.1	50	75	ball	40	1250	720	425		10	24kg	51*26.5*56
AF225F11LH7	200FZY7-S		0.23	50	75	ball	110	2500	1300	764		10	24kg	51*26.5*56
AF225F11LH8	200FZY8-S		0.23	50	75	ball	110	2500	1300	764		10	24kg	51*26.5*56
												10	24kg	51*26.5*56




Size: 280x280x80mm
Impeller material: Metal
Frame: Aluminum Alloy
Motor: shaded pole induction motor
Operation temperature: -10°C~+65°C
Label diameter: 70mm

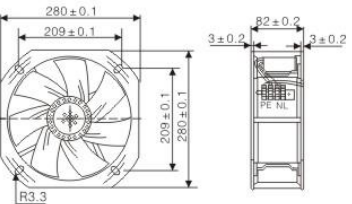

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power	Speed	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF280FL11	DS28083ABHL	110	0.7	50	69	ball	115	2400	1800	1060	WIRE	10	14kg	54.5*33*36
AF280F11F60	DS28083ABHL	110	0.7	60	69	ball	115	2400	1800	1060		10	14kg	54.5*33*36
AF280FL22	DS28083ABHL	220	0.5	50	69	ball	115	2400	1800	1060		10	14kg	54.5*33*36
AF280F22F60	DS28083ABHL	220	0.5	60	69	ball	115	2400	1800	1060		10	14kg	54.5*33*36
AF280FL38	DS28083ABHL	380	0.23	50	69	ball	115	2400	1800	1060		10	14kg	54.5*33*36
												10	14kg	54.5*33*36




Size:250x410x90mm
Impeller material:Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃



P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF250R11	250FZY1-D	110	0.36	50	60	ball	40	1300	633	376	1	5	15kg	56*43*31
AF250R11F60	250FZY1-D	110	0.36	60	60	ball	40	1300	633	376	1	5	15kg	56*43*31
AF250R22	250FZY2-D	220	0.36	50	60	ball	40	1300	633	376	1	5	15kg	56*43*31
AF250R22F60	250FZY2-D	220	0.36	60	60	ball	40	1300	633	376	1	5	15kg	56*43*31
AF250R383	250FZY3-D	380	0.1	50	60	ball	40	1300	633	376	3	5	15kg	56*43*31
AF250R384	250FZY4-D	380	0.1	50	60	ball	40	1300	633	376	1	5	15kg	56*43*31
AF250R22H6	250FZY6-D	220V	0.55	50	72	ball	110	2550	1266	753	1	5	15kg	56*43*31
AF250R22H6F60	250FZY6-D	220V	0.55	50	72	ball	110	2550	1266	753	1	5	15kg	56*43*31
AF250R38H7	250FZY7-D	380V	0.2	50	72	ball	110	2550	1266	753	3	5	15kg	56*43*31
AF250R38H8	250FZY8-D	380V	0.2	50	72	ball	110	2550	1266	753	1	5	15kg	56*43*31



Size:300x460x100mm
Impeller material:Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10℃~+65℃




P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)							pcs/ctn	weight	dimension
AF300R11	300FZY1-D	110	0.8	50	60	ball	80	1300	1137	668	terminal	5	18kg	60*47*36
AF300R11F60	300FZY1-D	110	0.8	60	60	ball	80	1300	1137	668		5	18kg	60*47*36
AF300R22	300FZY2-D	220	0.4	50	60	ball	80	1300	1137	668		5	18kg	60*47*36
AF300R22F60	300FZY2-D	220	0.4	60	60	ball	80	1300	1137	668		5	18kg	60*47*36
AF300R383	300FZY3-D	380	0.2	50	60	ball	80	1300	1137	668		5	18kg	60*47*36
AF300R384	300FZY4-D	380	0.2	50	60	ball	80	1300	1137	668		5	18kg	60*47*36
AF300R22H6	300FZY6-D	220V	1.9	50	72	ball	160	2550	2200	1294		5	18kg	60*47*36
AF300R22H6F60	300FZY6-D	220V	0.95	50	72	ball	160	2550	2200	1294		5	18kg	60*47*36
AF300R38H7	300FZY7-D	380V	0.35	50	72	ball	160	2550	2200	1294		5	18kg	60*47*36
AF300R38H8	300FZY8-D	380V	0.35	50	72	ball	160	2550	2200	1294		5	18kg	60*47*36



Size:395mmx130mm
Airflow:2100-3120m3/hr
1235-1836CFM
Weight:5950g
Noise:56-65dBA
Impeller Material:Metal

Frame:Metal
Terminals:0.5mm
LeadWire:Teflon 18#UL 1332(Optional)
Motor:Capacitor-Run Induction Motor
Operation temperature:-10℃~+105℃




Model	Bearing System	Voltage VAC	Freq.Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor
								M3/hr	CFM		
350FZY2-D	Ball	200/240	50/60	0.7	150	1360/1500	62/65	2880-3120	1659/1836	1	4.0uf/500v
350FZY3-D		380/420	50/60	0.35	150	1360/1500	62/65	2880-3120	1659/1836	3	/
350FZY4-D		380/420	50/60	0.4	150	1360/1500	62/65	2880-3120	1659/1836	1	2.2uf/630V



Size: 475mm x 130mm
Airflow: 3360-4400m3/hr
1977-2589CFM
Weight: 6800g
Noise: 58-70dBA
Impeller Material: Metal


Frame: Metal
Terminals:0.5mm
Lead Wire: Teflon 18#UL 1332(Optional)
Motor: Capacitor-Run Induction Motor
Operating Temperature: -10℃~+105℃




Model	Bearing System	Voltage VAC	Freq.Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor
								M3/hr	CFM		
400FZY2-D	Ball	200/240	50/60	0.8	180	1400/1560	68/70	4080/4400	2400/2589	1	6.0uf/500v
400FZY3-D		380/420	50/60	0.4	180	1400/1560	68/70	4080/4400	2400/2589	3	/
400FZY4-D		380/420	50/60	0.45	180	1400/1560	68/70	4080/4400	2400/2589	1	3.0uf/630V




Long tube type

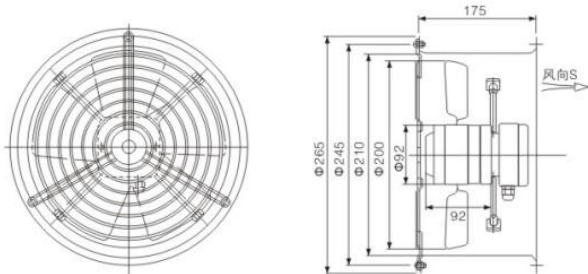

Short tube type

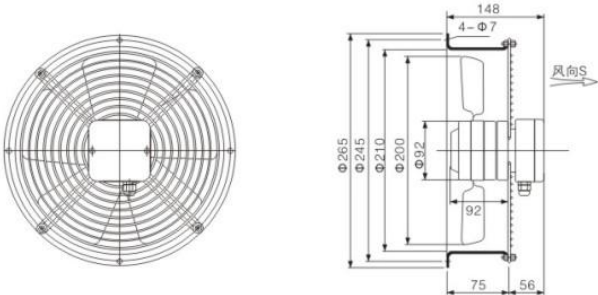


Square type

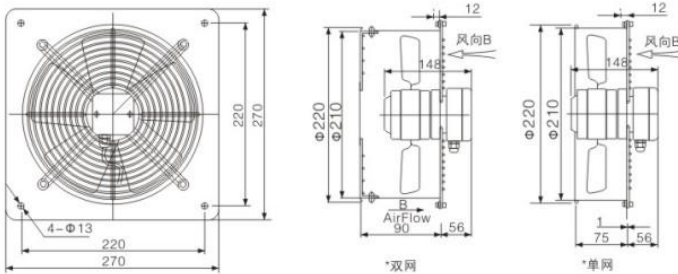

注：三相可以不带接线盒，直接电缆线引出，单相也可根据客户需要接线盒外挂或者不带接线盒



Mesh enclosure type

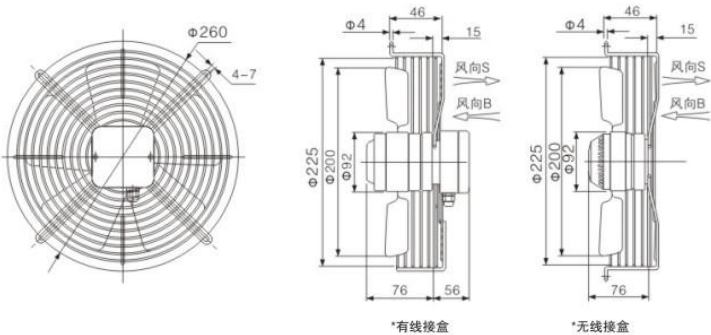


Specification

Model	Ratde voltage (V)	Frequency (Hz)	Current (A)	Input power (W)	Highest speed (r/min)	vol ume (m3/h)	Pressure (pa)	Noise db(A)	Capacitor μ F
YWF2D-200	380	50	0.25	80	2700	1080	122	57	-
YWF2E-200	220	50	0.30	70	2650	1050	120	56	2.5


We wil not inform vou if we change the data in the form




Long tube type

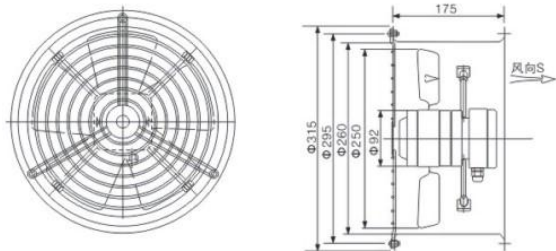

Short tube type

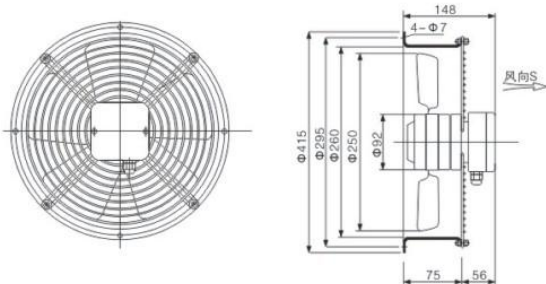


Square type

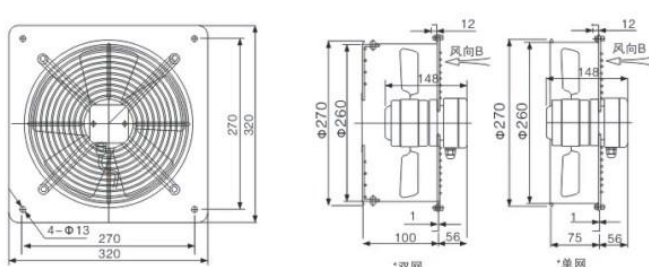

注：三相可以不带接线盒，直接电缆线引出，单相也可根据客户需要接线盒外挂或者不带接线盒



Mesh enclosure type

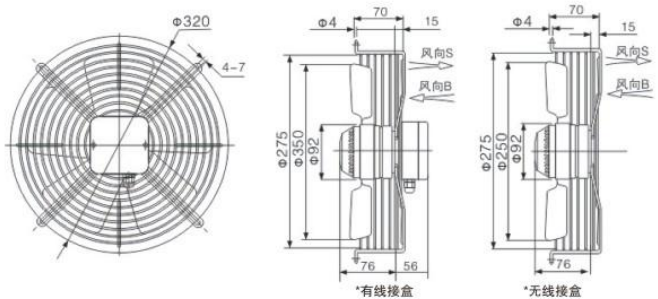

Specification


Model	Ratde voltage (V)	Frequency (Hz)	Current (A)	Input power (W)	Highest speed (r/min)	vol ume (m3/h)	Pressure (pa)	Noise db(A)	Capacitor μ F
YWF2D-250	380	50	0.25	110	2650	1850	192	65	2.4
YWF2E-250	220	50	0.53	110	2550	1800	190	65	4
YWF4D-250	380	50	0.23	40	1450	1250	60	55	1.0
YWF4E-250	220	50	0.30	40	1440	1230	60	55	1.0

We wil not inform vou if we change the data in the form



Size:120x120x38mm
Impeller material:Aluminum Alloy
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:60mm







P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF12385B11LM	DS12038ABHLM	110	0.22	50/60	39	ball	20	2550	148	87	wire	40	24kg	51*29.5*29
AF12385B11TM	DS12038ABHTM	110	0.22	50/60	39	ball	20	2550	148	87	terminal	40	24kg	51*29.5*29
AF12385B22LM	DS12038ABHLM	220	0.11	50/60	39	ball	20	2550	148	87	wire	40	24kg	51*29.5*29
AF12385B22TM	DS12038ABHTM	220	0.11	50/60	39	ball	20	2550	148	87	terminal	40	24kg	51*29.5*29
AF12385B38LM	DS12038ABHLM	380	0.06	50/60	39	ball	20	2550	148	87	wire	40	24kg	51*29.5*29
AF12385B38TM	DS12038ABHTM	380	0.06	50/60	39	ball	20	2550	148	87	terminal	40	24kg	51*29.5*29



Size: 172x150x55mm
Impeller material: Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:53mm










P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		WIRE/ TERMINAL	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF170M11L	DS17055ABHLM	110	0.52	50	49	ball	37	2650	320	189	Wires/ Terminal	20	24kg	36*32*32
AF170M11L60	DS17055ABHLM		0.43	60	53		34	3000	380	224		20	24kg	36*32*32
AF170M22L	DS17055ABHLM	220V	0.25	50	49		37	2650	320	189		20	24kg	36*32*32
AF170M22L60	DS17055ABHLM		0.2	60	53		34	3000	380	224		20	24kg	36*32*32
AF170M38L	DS17055ABHLM	380V	0.15	50	49		37	2650	320	189		20	24kg	36*32*32
AF170M38L60	DS17055ABHLM		0.12	60	53		34	3000	380	224		20	24kg	36*32*32



Size:140x140x50mm
Impeller material : Metal
Frame: Aluminum Alloy
Motor: Shaded pole induction motor
Operation Temperature : -10°C~+100°C
Label diameter : 52mm



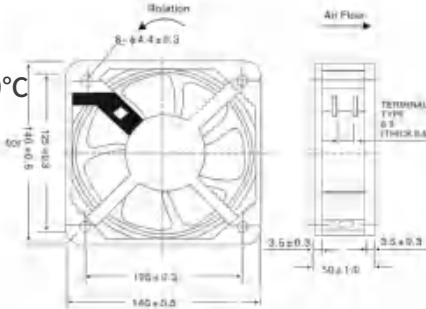


P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		WIRE/ TERMINAL	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF1450MB11L	DS14050ABHLM	110	0.52	50	49	ball	30	2550	320	189	Wires/ Terminal	20	22kgs	33*29*34
AF1450MB11L60	DS14050ABHLM	220	0.43	60	53		27	2800	380	224		20	22kgs	33*29*34
AF1450MB22L	DS14050ABHLM	380	0.25	50	49		30	2550	320	189		20	22kgs	33*29*34
AF1450MB22L60	DS14050ABHLM	220	0.2	60	53		27	2800	380	224		20	22kgs	33*29*34
AF1450MB38L	DS14050ABHLM	380	0.15	50	49		30	2550	320	189		20	22kgs	33*29*34
AF1450MB38L60	DS14050ABHLM	380	0.12	60	53		27	2800	380	224		20	22kgs	33*29*34



Size: 160x160x55mm
Impeller material: Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:48.5mm




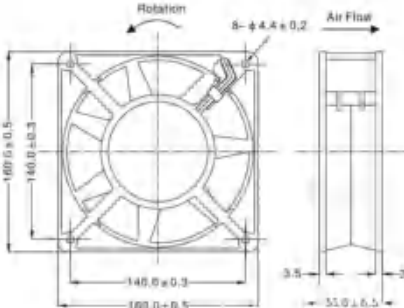

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		WIRE/ TERMINAL	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF160M11L	DS16055ABHLM	110	0.52	50	49	ball	37	2650	320	189	Wires/ Terminal	20	25kg	36*32*32
AF160M11L60	DS16055ABHLM		0.43	60	53		34	3000	380	224		20	25kg	36*32*32
AF160M22L	DS16055ABHLM	220V	0.25	50	49		37	2650	320	189		20	25kg	36*32*32
AF160M22L60	DS16055ABHLM		0.2	60	53		34	3000	380	224		20	25kg	36*32*32
AF160M38L	DS16055ABHLM	380V	0.15	50	49		37	2650	320	189		20	25kg	36*32*32
AF160M38L60	DS16055ABHLM		0.12	60	53		34	3000	380	224		20	25kg	36*32*32




Size:180x180x60mm
Impeller material : Metal
Frame: Aluminum Alloy
Motor: Shaded pole induction motor
Operation Temperature : -10°C~+100°C
Label diameter : 65mm

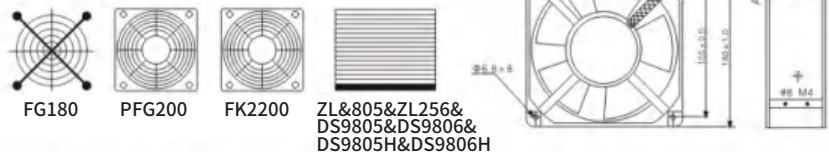

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF1860MB11L	DS18060ABHLM	110	0.7	50	60	ball	60	2650	618	363	wire	10	20kgs	40*21*37
AF1860MB22L	DS18060ABHLM	220	0.375	50	60	ball	60	2650	618	363	Wire	20	20kgs	40*21*37
AF1860MB38L	DS18060ABHLM	380	0.215	50	60	ball	60	2650	618	363	wire	20	20kgs	40*21*37




Size: 254x254x89mm
Impeller material: Metal
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+100°C
Label diameter:70mm

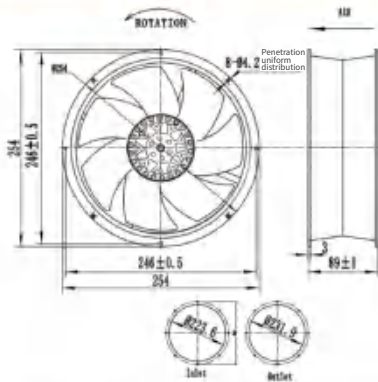

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (W)	Speed (RPM)	Air Volume		Connector	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF25489M11L	DS25489ABHLM	110	0.68	50	69	ball	105	2520	1150	676	Wire	5	14kg	54.5*33*36
AF25489M11L60	DS25489ABHLM	110	0.68	60	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M22L	DS25489ABHLM	220	0.54	50	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M22L60	DS25489ABHLM	220	0.5	60	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M38L	DS25489ABHLM	380	0.23	50	69		105	2520	1150	676		5	14kg	54.5*33*36
AF25489M38L60	DS25489ABHLM	380	0.23	60	69		105	2520	1150	676		5	14kg	54.5*33*36





Size:200x200x60mm
Impeller material : Metal
Frame: Aluminum Alloy
Motor: Shaded pole induction motor
Operation Temperature : -10°C~+100°C
Label diameter : 65mm

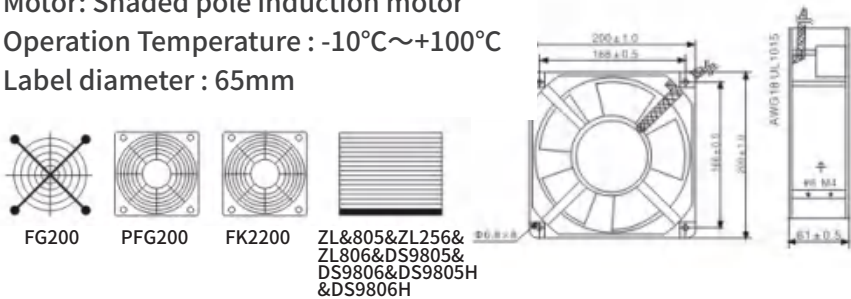

P/N	Model	Voltage	Current	Freq	Noise	Bearing	Power (Watt)	Speed (r/min)	Air Volume		WIRE/ TERMINAL	Packing		
		(V)	(A)	(HZ)	(Db)				(m3/h)	(CFM)		pcs/ctn	weight	dimension
AF2060MB11L	DS20060ABHLM	110	0.78	50	65	ball	65	2550	680	400	Wire	10	21kgs	47*24*47.2
AF2060MB22L	DS20060ABHLM	220	0.4	50	65	ball	65	2550	680	400		10	21kgs	47*24*47.2
AF2060MB38L	DS20060ABHLM	380	0.24	50	65	ball	65	2550	680	400		10	21kgs	47*24*47.2




Size:280x280x80mm
Impeller material:Plastic PA66
Frame:Aluminum Alloy
Motor:shaded pole induction motor
Operation temperature:-10°C~+65°C
Label diameter:70mm

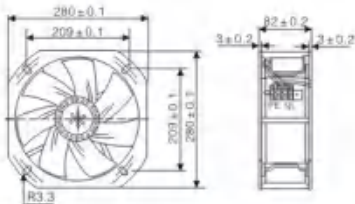

P/N	Model	Voltage (V)	Current (A)	Freq (HZ)	Noise (Db)	Bearing	Power (Watt)	Speed (r/min)	Air Volume (m3/h)	(CFM)	connector	Function	Packing		
													pcs/ctn	weight	dimension
DF280FL12P	DF28080B12HP	12	10.84	50/60	69	ball	130	3000	2040	1200	Terminal	PWM+FG	5	14kgs	54.5*33*36
DF280FL24P	DF28080B24HP	24	5.42	50/60	69	ball	130	3000	2040	1200	Terminal		5	14kgs	54.5*33*36
DF280FL48P	DF28080B48HP	48	2.71	50/60	69	ball	130	3000	2040	1200	Terminal		5	14kgs	54.5*33*36
DF280FL12S	DF28080B12HS	12	10.84	50/60	69	ball	130	3000	2040	1200	Terminal	Temperature Sensor	5	14kgs	54.5*33*36
DF280FL24S	DF28080B24HS	24	5.42	50/60	69	ball	130	3000	2040	1200	Terminal		5	14kgs	54.5*33*36
DF280FL48S	DF28080B48HS	48	2.71	50/60	69	ball	130	3000	2040	1200	Terminal		5	14kgs	54.5*33*36

PERFORMANCE CURVES

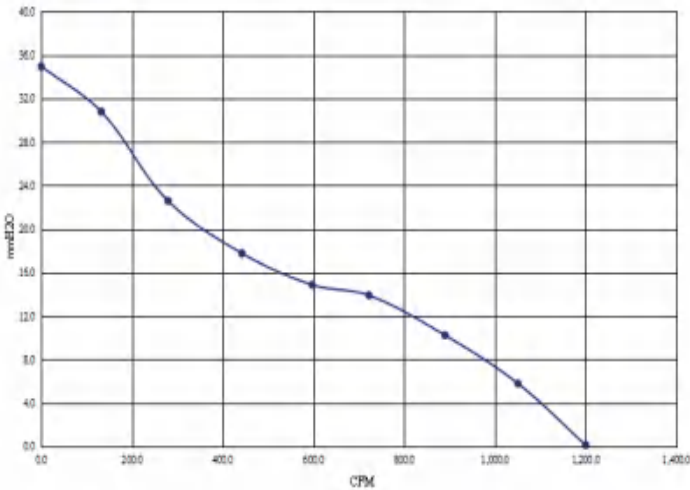



Red	Black	Blue	Yellow	White

Line	Connection	Colour	Assignmeng/function
1	+	Red	Maximum ripple +- 3.5%
	-	Black	Maximum ripple +- 3.5%
	PWM/Sensor	Blue	Control input 0-10V PWM / NTC Temperature sensor (One fan only can choose 1 function)
	RD	White	RD Alarm signal
	FG	Yellow	FG Signal



Size:Φ250x85mm
Airflow: 1450-2600m3/h
854-878CFM
Weight : 2400-3100g
Noise: 62-75dB
Type of protection: IP44

Impeller: Metal
Frame: Aluminum Alloy
Motor: External Rotor Induction motor
Operation Temperature : -10°C~+100°C
Insulation class: F





P/N	Model	Voltage (V)	Current (A)	Freq (HZ)	Noise (Db)	Power (W)	Speed (RPM)	Air Volume (m3/h)	CFM	Static Pressure Pa	mmH2O	Capacitor μF	Packing		
													pcs/ctn	weight	dimension
AF2E250HJM11	YWF2E-250HJM	110	1.46	50	75	160	2600	1400	825	580	59.1	20	6	19kgs	53*29*37
AF2E250HJM22	YWF2E-250HJM	220	0.73	50	75	160	2600	1400	825	580	59.1	5	6	19kgs	53*29*37
AF2D250HJM38	YWF2D-250HJM	380	0.3	50	62	65	1450	800	475	580	59.1	3	6	15kgs	53*29*37



Size:Φ280x85mm
Airflow: 1450-2100m3/h
1120-1237CFM
Weight: 2900-3100g
Noise: 63-76dB Type of protection: IP44

Impeller: Metal
Frame: Aluminum Alloy
Motor: External Rotor Induction motor
Operation Temperature : -10°C~+100°C
Insulation class: F




P/N	Model	Voltage (V)	Current (A)	Freq (HZ)	Noise (Db)	Power (W)	Speed (RPM)	Air Volume (m3/h)	CFM	Static Pressure Pa	mmH2O	Capacitor μF	Packing		
													pcs/ctn	weight	dimension
AF2E280HJM11	YWF2E-280HJM	110	2.08	50	76	230	2700	2100	1237	788	80.1	20	3	10kgs	53*29*37
AF2E280HJM22	YWF2E-280HJM	220	1.04	50	76	230	2700	2100	1237	788	80.1	7	3	10kgs	53*29*37
AF2D280HJM38	YWF2D-280HJM	380	0.35	50	63	80	1450	1450	1120	788	80.1	4	3	9kgs	53*29*37



Size: Φ315x154mm
Airflow: 2100m3/h
1237CFM
Weight : 3500g
Noise: 60dB
Type of protection: IP44

Impeller: Metal
Frame: Aluminum Alloy
Motor: External Rotor Induction motor
Operation Temperature: -10°C~+100°C
Insulation class: F

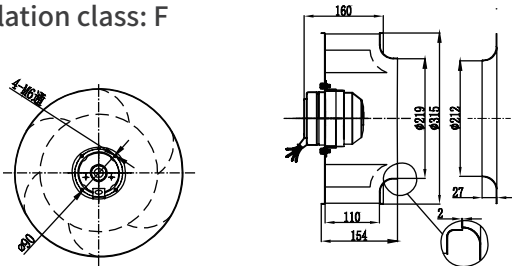


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF4E315HJM22	YWF4E-315HJM	220	0.48	50	60	120	1400	2100	1237	788	80.1	5	3	11kgs	53*29*37
AF4D315HJM38	YWF4D-315HJM	380	0.35	50	60	110	1400	2100	1237	788	80.1	20	3	11kgs	53*29*37



Size: Φ400x145mm
Airflow: 3150-4500m3/h
1855-2650CFM
Weight : 9800g
Noise: 64-70dB
Type of protection: IP44

Impeller: Metal
Frame: Aluminum Alloy
Motor: External Rotor Induction motor
Operation Temperature: -10°C~+100°C
Insulation class: F

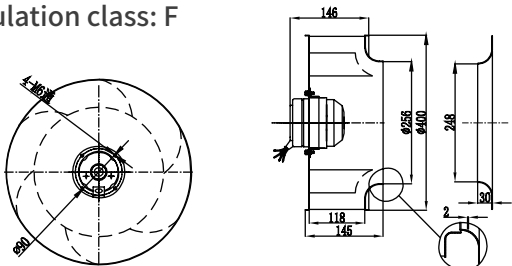


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF4E400HJM22	YWF4E-400HJM	220	1.27	50	60	260	1380	4500	2650	715	73	8	2	20kgs	53*29*37
AF4D400HJM38	YWF4D-400HJM	380	0.6	50	64	265	1300	3150	1855	500	51	-	2	10kgs	53*29*37



Size: Φ355x146mm
Airflow: 3600m3/h
2120CFM
Weight : 4800g
Noise: 60-65dB
Type of protection: IP44

Impeller: Metal
Frame: Aluminum Alloy
Motor: External Rotor Induction motor
Operation Temperature: -10°C~+100°C
Insulation class: F

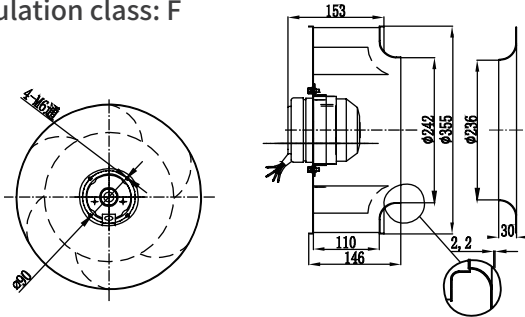


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF4E355HJM22	YWF4E-355HJM	220	0.76	50	60	180	1400	3600	2120	572	58.3	6	3	15kgs	53*29*37
AF4D355HJM38	YWF4D-355HJM	400	0.35	50	65	170	1400	3600	2120	572	58.3	-	3	15kgs	53*29*37



Size: Φ450x220mm
Airflow: 5200m3/h
3063CFM
Weight : 12500g
Noise: 75dB
Type of protection: IP44

Impeller: Metal
Frame: Aluminum Alloy
Motor: External Rotor Induction motor
Operation Temperature: -10°C~+100°C
Insulation class: F

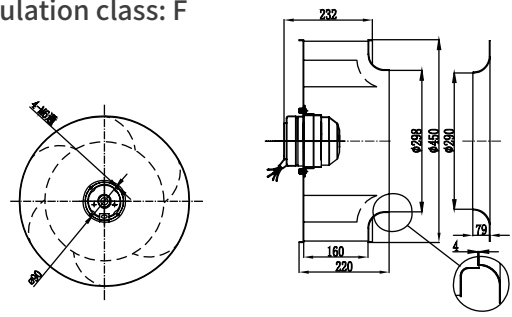


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF4E450HJM22	YWF4E-450HJM	220	3.58	50	75	580	1420	5200	3063	487	83	12	1	12.5kgs	53*29*37
AF4D450HJM38	YWF4D-450HJM	380	1.79	50	75	580	1420	5200	3063	487	83	-	1	12.5kgs	53*29*37



Size: Φ133x62mm
Airflow: 280-300m3/h
165-177CFM
Weight: 800g
Noise: 54dB
Type of protection: IP44

Impeller: PA66
Frame: GF 25% V0
Motor: Shaded Pole and External Rotor
Induction motor
Operation Temperature: -10°C~+65°C
Insulation class: F

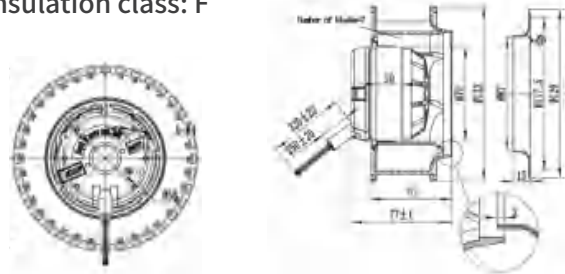


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF2E133HJ11	YWF2E-133HJ	110	0.44	50	54	32	2160	230	136	148	15	-	6	5kgs	53*29*37
AF2E133HJ22	YWF2E-133HJ	220	0.22	50	54	32	2160	230	136	148	15	-	6	5kgs	53*29*37



Size: Φ190x62mm
Airflow: 737m3/h
435CFM
Weight : 1200g
Noise: 74dB
Type of protection: IP44

Impeller: PA66
Frame: GF 25% V0
Motor: Shaded Pole and External Rotor
Induction motor
Operation Temperature: -10°C~+65°C
Insulation class: F

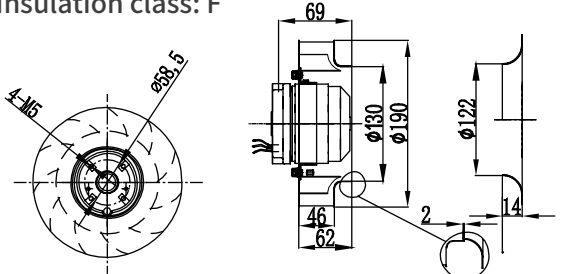


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF2E190HJ11	YWF2E-190HJ	110	0.78	50	68	84	2600	737	435	426	43.4	8	6	7.5kgs	53*29*37
AF2E190HJ22	YWF2E-190HJ	220	0.39	50	68	84	2600	737	435	426	43.4	3	6	7.5kgs	53*29*37
AF2D190HJ38	YWF2D-190HJ	380	0.28	50	68	84	2600	737	435	426	43.4	/	6	7.5kgs	53*29*37



Size: Φ175x65mm
Airflow: 430-440m3/h
253-259CFM
Weight : 1000g
Noise: 60dB
Type of protection: IP44

Impeller: PA66
Frame: GF 25% V0
Motor: Shaded Pole and External Rotor
Induction motor
Operation Temperature: -10°C~+65°C
Insulation class: F

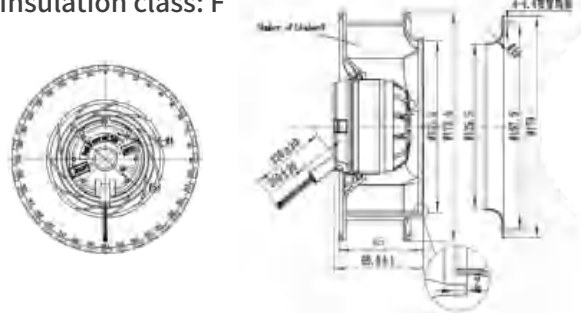


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF2E175HJ11	YWF2E-175HJ	110	0.74	50	60	78	2700	610	359	225	32.5	-	6	6kgs	53*29*37
AF2E175HJ22	YWF2E-175HJ	220	0.37	50	60	78	2700	610	359	225	32.5	-	6	6kgs	53*29*37



Size: Φ220x64mm
Airflow: 807m3/h
477CFM
Weight : 2500g
Noise: 69dB
Type of protection: IP44

Impeller: PA66
Frame: GF 25% V0
Motor: Shaded Pole and External Rotor
Induction motor
Operation Temperature: -10°C~+65°C
Insulation class: F


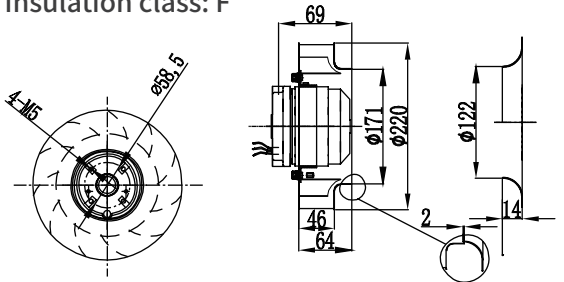


P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m3/h)	CFM	Pa	mmH2O	μF	pcs/ctn	weight	dimension
AF2E220HJ22	YWF2E-220HJ	220	0.41	50	69	92	2400	807	477	467	47.5	3	6	15kgs	53*29*37
AF2D220HJ38	YWF2D-220HJ	380	0.2	50	69	92	2400	807	477	467	47.5	/	6	15kgs	53*29*37



Size: $\Phi 225 \times 89 \text{ mm}$
 Airflow: 980m³/h
 477CFM
 Weight: 2700g
 Noise: 70dB
 Type of protection: IP44

Impeller: PA66
 Frame: GF 25% V0
 Motor: Shaded Pole and External Rotor
 Induction motor
 Operation Temperature: -10°C~+65°C
 Insulation class: F





P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m ³ /h)	CFM	Pa	mmH ₂ O	μF	pcs/ctn	weight	dimension
AF2E225HJ22	YWF2E-225HJ	220	0.45	50	70	95	2200	980	477	568	57.7	4	6	17kgs	53*29*37
AF2D225HJ38	YWF2D-225HJ	380	0.23	50	70	95	2200	980	477	568	57.7	/	6	17kgs	53*29*37



Size: $\Phi 250 \times 85 \text{ mm}$
 Airflow: 1450m³/h
 858CFM
 Weight : 2900g
 Noise: 70dB
 Type of protection: IP44

Impeller: PA66
 Frame: GF 25% V0
 Motor: Shaded Pole and External Rotor
 Induction motor
 Operation Temperature: -10°C~+65°C
 Insulation class: F



P/N	Model	Voltage	Current	Freq	Noise	Power	Speed	Air Volume		Static Pressure		Capacitor	Packing		
		(V)	(A)	(HZ)	(Db)	(W)	(RPM)	(m ³ /h)	CFM	Pa	mmH ₂ O	μF	pcs/ctn	weight	dimension
AF2E250HJ22	YWF2E-250HJ	220	0.55	50	70	121	1900	1800	1060	720	73.4	4	6	18kgs	53*29*37
AF2D250HJ38	YWF2D-250HJ	380	0.28	50	70	121	1900	1800	1060	720	73.4	/	6	18kgs	53*29*37