

No. BVPMBG_4539

Genehmigungsinhaber
Holder

Wenzhou Guipai Electric Co., Ltd

No.16, Yulan Road, Binhai Zone, Wenzhou Economic Technology Development Zone, Wenzhou City, Zhejiang Province - CHINA

Fertigungsstätte
Manufacturing site

Wenzhou Guipai Electric Co., Ltd (26252)

No.16, Yulan Road, Binhai Zone, Wenzhou Economic Technology Development Zone, Wenzhou City, Zhejiang Province - CHINA

Aktenzeichen
File No.
TL784280

Ausstellungsdatum
Date of delivery
29/11/2023

Gültig bis
Expired on
28/11/2028

Geprüft nach / Tested in conformity with

DIN VDE 0620-1:2016+A1:2017

Testbericht Nr. / Test report No

ACMW-ESH-P22061015-1

Produkt / Product

Wandsteckdose / Socket-outlet for fixed-electrical installations

Modell / Model

9220-42, 9220-52, 9226-42, 9226-52, 9226-42CP, 9226-52CP

Nominalwerte / Rated characteristics

Siehe Anhang / See Annex

Markenname / Brand name

Lexman / SIRODE

Weitere Angaben / Additional information


Prüfung nach Punkt 10.5 DIN VDE 0620-1 :2021 /
Tested acc. Clause 10.5 DIN VDE 0620-1 :2021

Dieser Genehmigung liegen unsere Prüf- und Zertifizierungsregeln zugrunde. *The present approval is submitted to our Testing and Certification rules.*

Die Gültigkeit dieser Lizenz endet mit der Aufhebung eines der Standards, auf denen sie basiert. *The present license is valid until the cancellation of one of the standards on which it is based.*

Zertifizierungsstelle erfüllt ISO/IEC 17065. *Certification Body complies with ISO/IEC 17065.*

Fontenay-aux-Roses, 29/11/2022

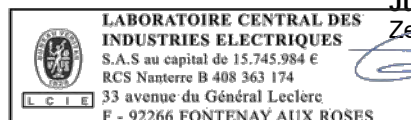

Julien GAUTHIER

Zertifizierungsleiter / Certification Officer



REFERENCES, MAIN CHARACTERISTICS

REFERENCE	NUMBER OF SOCKETS	SPECIFICITY
9220-42	1	16A 250V~ / With shutter
9220-52	2	16A 250V~ / With shutter
9226-42	1	16A 250V~ / Without shutter
9226-52	2	16A 250V~ / Without shutter
9226-42CP	1	16A 250V~ / With shutter
9226-52CP	2	16A 250V~ / With shutter

Standard Sheet	DIN 49440-1
Rated current (A)	16A
Rated load (W)	-
Rated voltage (V)	250 V~
Household voltage (V)	-
Degree of protection	IP20
Provision for earthing	with earthing contact
Method of connecting the cable	rewirable
Type of terminals	screw-type(rigid and flexible)
Colour	Any color
socket-outlets	
Multiple socket-outlets	16 A : 1 or 2
Number of socket-outlets	
Degree of protection against electric shock	normal protection
Existence of shutters	with shutters
Method of application - mounting	flush-type
Method of installation	design A

