



Celaeno™ 纳米隐形膜

# Nano Cloaking Film

## Super Clear, Cost Effective, Data Security

Nano Cloaking Film is made by NHDFilm. It is an LED cloaking technology for glass walls that obscures content on screens from outside view. It's a high transparent film material with back adhesion which can be easily pasted on the glass. Anyone looking into the room from the outside sees just a black screen, while everyone in the room can work freely with peace of mind.

**New**

Without Nano Cloaking Film



***Now You See it.***

***Now You Don't!***

With Nano Cloaking Film



## Applications

NOMURA Shanghai Office




ILLUMINA Beijing Office



CISCO Shanghai Office



Melbourne University

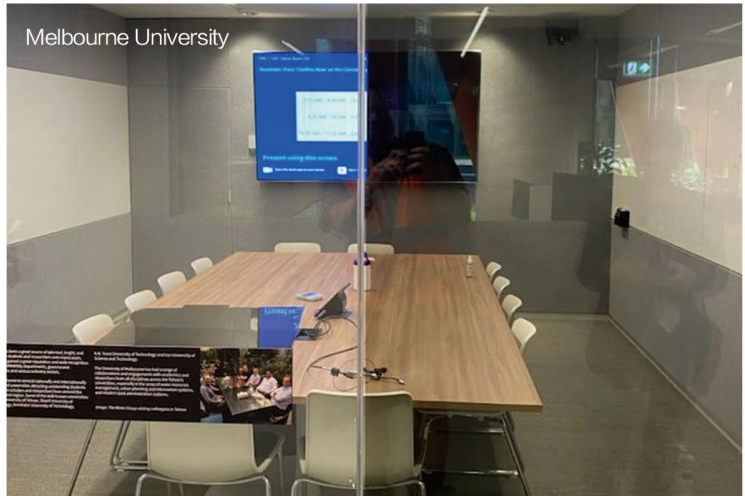

## Data Sheet

|                             |                                     |
|-----------------------------|-------------------------------------|
| Product Name                | Nano Cloaking Film (Celaeno™)       |
| Model                       | T0F2                                |
| Use                         | Architectural Glass Films           |
| Compatibility <sup>※1</sup> | LCD/LED Display                     |
| Length                      | 100feet                             |
| Width                       | 48/60inch                           |
| Visible Light Transmittance | 43%                                 |
| Cloaking Efficiency         | 99.95%                              |
| Effective Thickness         | .006 ~ .007inch                     |
| Color                       | Clear Grey                          |
| Material                    | PET + Triacetate+ Polyvinyl         |
| Backing Adhesion            | Acrylic Pressure-sensitive Adhesive |

※ Above are sample values and not an absolute guaranteed.

※ 1 Before use, please MUST test the compatibility of the LCD/LED monitor EVERY single time.

This product does not guarantee to support for all monitors. Even if they are same brands and models, due to different coating materials and assembly structures.

※ 2 Standard installation orientation is 0 degree, small part of installation orientations are 90 degrees or other angles. If you have any questions, please consult our company or local dealers.

|                            |                                                                                                                                                                                                                                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Surface Treatment          | Anti-crack/Scratch Resistant HC(Optional)                                                                                                                                                                                                                                      |
| Orientation <sup>※2</sup>  | 0 Degree(Standard Vertical)                                                                                                                                                                                                                                                    |
| Working Environment        | -5 ~ +60°C/90%RH                                                                                                                                                                                                                                                               |
| Severe Environment Testing | -30 ~ +80°C/90%RH/1200H                                                                                                                                                                                                                                                        |
| Storage Environment        | +10 ~ +30°C/70%RH                                                                                                                                                                                                                                                              |
| Packaging & Label          | Composite Sealing/Sun & Moisture Proof Warning                                                                                                                                                                                                                                 |
| Effective Warranty         | 60Months                                                                                                                                                                                                                                                                       |
| Test Report                | <ul style="list-style-type: none"> <li>Chemistry, REACH SVHC 263/RoHS, Compliant</li> <li>VOC, CA 01350, Pass</li> <li>Flammability, ASTM E 84, Class A, Pass</li> <li>Fire Safety, EN 13501-1, C-s2-d0, Pass</li> <li>SDS/COA, by Regulations of Importing Country</li> </ul> |
| Place of Origin            | China                                                                                                                                                                                                                                                                          |

### Manufacturers/ Brand Owner

**NANHAI DISPLAY LIMITED**

ROOMS 1318-19, HOLLYWOOD PLAZA,  
610 Nathan Road, Mongkok, Kowloon, HK, 999077  
URL <http://www.nhdfilm.com> / E-mail [joe@nhdfilm.com](mailto:joe@nhdfilm.com)

### Exporter/ General Agent

**XIUYA TECHNOLOGY (SHANGHAI) CO., LTD.**

ROOM U22, BUILDING 3, NO. 39 LINBAO ROAD, TINGLIN TOWN, JINSHAN DISTRICT, SHANGHAI  
TEL 0086-021-57525589  
URL <http://www.showyaaa.com> / E-mail [sun@showyaaa.com](mailto:sun@showyaaa.com)

### Distributor/ Dealer