

Stainless Steel Pneumatic Connector Series


Applicable Tubing

Tubing material	FEP,PFA, Nylon, Soft nylon, Polyurethane,Polyolefin
Tubing O.D.	Φ4, Φ6,Φ8, Φ10,Φ12,Φ16

Specifications


Fluid	Air, N2, Water
Operating pressure range	-100 kPa to 1 Mpa
Proof pressure	3.0 MPa
Ambient and fluid temperature	-5 to 15° c (No freezing)
Lubricant	Grease-free specification
Seal on the threads	With sealant

PC-Stainless Steel Straight Male Connector

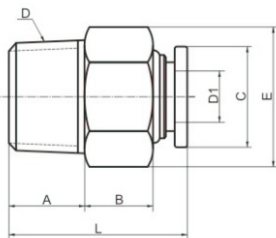


Specifications	A	B	C	D	D1	E	L
4-M5	4	6	10	M5	4.2	10	21
4-M6	4	6	10	M6	4.2	10	21
4-01	8	6	10	1/8	4.2	10	20
4-02	9	6	10	1/4	4.2	14	22
6-M5	4	8	12	M5	6.2	12	22
6-M6	4	7	12	M6	6.2	12	22
6-01	8	8	12	1/8	6.2	12	22
6-02	9	7	12	1/4	6.2	14	22
6-03	9	8	12	3/8	6.2	17	22
6-04	12	7	12	1/2	6.2	22	26
8-01	8	11	14	1/8	8.2	14	24
8-02	9	8	14	1/4	8.2	14	23
8-03	9	7	14	3/8	8.2	17	22
8-04	13	7	14	1/2	8.2	22	26
8-06	13	8	14	3/4	8.2	27	28
10-01	8	12	16	1/8	10.2	17	26
10-02	9	12	16	1/4	10.2	17	29
10-03	9	8	16	3/8	10.2	17	23
10-04	13	7	16	1/2	10.2	22	26
10-06	13	8	16	3/4	10.2	27	28
12-01	8	12	18	1/8	12.2	17	26
12-02	9	12	18	1/4	12.2	17	29
12-03	9	9	18	3/8	12.2	17	24
12-04	13	9	18	1/2	12.2	22	26
12-06	13	8	18	3/4	12.2	27	28
14-02	9	11	20	1/4	14.2	22	27
14-03	9	11	20	3/8	14.2	22	27
14-04	13	9	20	1/2	14.2	22	28
16-02	9	12	22	1/4	16.2	22	28
16-03	9	12	22	3/8	16.2	22	28
16-04	13	8	22	1/2	16.2	22	28
16-06	13	8	22	3/4	16.2	27	28

PL-Stainless Steel Elbow Male Connector

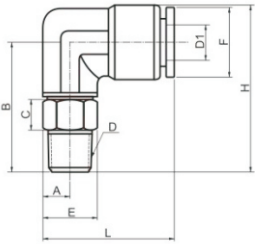


Specifications	A	B	C	D	D1	E	F	H
4-M5	6	23.7	7.5	M5	4.2	12	9.8	28.7
4-M6	7	24.5	7	M6	4.2	12	9.8	29.5
4-01	6	23.7	7.5	1/8"	4.2	12	9.8	28.7
4-02	7	24.5	7	1/4"	4.2	14	9.8	29.5
6-M5	6	24	7	M5	6.2	12	12	30
6-M6	7	26	7	M6	6.2	12	12	32
6-01	6	24	7	1/8"	6.2	12	12	30
6-02	7	26	7	1/4"	6.2	14	12	32
6-03	8.5	28	7.6	3/8"	6.2	17	12	34
6-04	11	28	7	1/2"	6.2	22	12	34
8-01	6	26	7	1/8"	8.2	12	14	33
8-02	7	26	7	1/4"	8.2	14	14	33
8-03	8.5	28	8	3/8"	8.2	17	14	35
8-04	11	29	7	1/2"	8.2	22	14	36
10-01	6	25.5	7	1/8"	10.2	12	16	34
10-02	7	26.5	7	1/4"	10.2	14	16	35
10-03	8.5	27.5	7	3/8"	10.2	17	16	36
10-04	11	31.5	7	1/2"	10.2	22	16	40
12-02	7	27.5	7	1/4"	12.2	14	18	37
12-03	8.5	26.5	7	3/8"	12.2	17	18	36
12-04	11	31	7	1/2"	12.2	22	18	40.5
14-02	7	31	7	1/4"	14.2	14	20	42
14-03	8.5	31	7	3/8"	14.2	17	20	42
14-04	11	34	7	1/2"	14.2	22	20	45
16-02	7	30.5	7	1/4"	16.2	14	22	42
16-03	8.5	30.5	7	3/8"	16.2	17	22	42
16-04	11	35	7	1/2"	16.2	22	22	46.5

PB-Stainless Steel Tee Male Connector




Specifications	A	B	C	D	E	F	G	H
4-M5	12	M5	7	8	4.2	10	2	28
4-M6	12	M8	7	8	4.2	10	2	28
4-01	12	1/8"	7	8	4.2	10	2	28
4-02	14	1/4"	7	8	4.2	10	2	28
4-03	17	3/8"	7	8	4.2	10	2	30
6-M5	12	M5	7	10	8.2	12	2	30
6-M6	12	M6	7	10	6.2	12	2	31
6-01	12	1/8"	7	10	6.2	12	2	30
6-02	14	1/4"	7	10	6.2	12	2	31
6-03	17	3/8"	7	10	8.2	12	2	32
6-04	22	1/2"	7	10	6.2	12	2	34
8-01	12	1/8"	7	12	8.2	14	2	32
8-02	14	1/4"	7	12	0.2	14	2	33
8-03	17	3/8"	7	12	8.2	14	2	35
8-04	22	1/2"	7	12	8.2	14	2	37
10-01	12	1/8"	7	15	10.2	16	2	33
10-02	14	1/4"	7	15	10.2	16	2	35
10-03	17	3/8"	7	15	10.2	16	2	36
10-04	22	1/2"	7	15	10.2	16	2	40
12-01	12	1/8"	7	17	12.2	18	2	36
12-02	14	1/4"	7	17	12.2	18	2	38
12-03	17	3/4"	7	17	12.2	18	2	38
12-04	22	1/2"	7	17	12.2	18	2	41
14-02	17	1/4"	7	20	14.2	20	2	40
14-03	19	3/8"	7	20	14.2	20	2	40
14-04	22	1/2"	7	20	14.2	20	2	41
16-02	17	1/4"	7	20	16.2	22	2	41
16-03	19	3/8"	7	20	16.2	22	2	42
16-04	22	1/2"	7	20	16.2	22	2	42

PCF-Stainless Steel Straight Female Connector

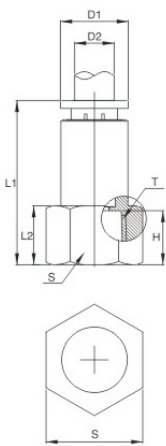


Specifications	D2	D1	T	L	H	L2	S
4-M5	4.2	9.8	M5*0.8p	24	6	10.5	10
4-01	4.2	9.8	G 1/8	26	9	10.5	14
4-02	4.2	9.8	G 1/4	29	11	13.5	17
4-03	4.2	9.8	G3/8	29	11	13.5	19
6-M5	6.2	11.8	M5*0.8p	24	6	10.5	12
6-01	6.2	11.8	G 1/8	23	9	10.5	14
6-02	6.2	11.8	G1/4	28	11	13.5	17
6-03	6.2	11.8	G3/8	29	11	13.5	19
6-04	6.2	11.8	G1/2	30	13	15	24
8-01	6.2	13.8	G1/8	26	9	10.5	14
8-02	8.2	13.8	G 1/4	28	11	13.5	17
8-03	8.2	13.8	G 3/8	29	11	13.5	19
8-04	8.2	13.8	G 1/2	30	13	15	24
10-01	8.2	15.8	G1/8	29	9	10.5	17
10-02	10.3	15.8	G 1/4	29	11	13.5	17
10-03	10.3	15.8	G3/8	29	11	13.5	19
10-04	10.3	15.8	G1/2	31	11	15	24
12-02	12.3	17.8	G1/4	29	11	13.5	17
12-03	12.3	17.8	G3/8	29	11	13.5	19
12-04	12.3	17.8	G1/2	31	13	15	24
14-02	14.2	20	G1/4	28	13	16	22
14-03	14.2	20	G3/8	28	13	16	22
14-04	14.2	20	G1/2	30.5	14.8	16	24
16-02	16.2	22	G1/4	31	13	18	22
16-03	16.2	22	G3/8	28.3	12	16.5	22
16-04	16.2	22	G1/2	31	14	16.5	24

PU-Stainless Steel Straight Union Connector




Specifications	A	B	C	D	d	L
4-4	2	8.5	10	10	4.2	32
6-6	2	10.5	12	12	6.2	32
8-8	2	12.6	14	14	8.2	32
10-10	2	16.5	18	16	10.2	33
12-12	2	18.5	20	18	12.2	34
14-14	2	20	22	20	14.2	34
16-16	2	22	24	22	16.2	36

PG-Stainless Steel Straight Union Connector




Specifications	A	B	C	D	d	E	F	L
6-4	12	6.2	2	12	10	4.2	8	32
8-4	14	8.2	2	14	10	4.2	8	34
8-6	14	8.2	2	14	12	6.2	12	34
10-6	16	10.2	2	16	12	6.2	12	35
10-8	16	10.2	2	16	14	8.2	14	35
12-8	18	12.2	2	18	14	8.2	14	35
12-10	18	12.2	2	18	16	10.2	16	35
14-12	20	14.2	2	20	18	12.2	18	35
16-12	22	16.2	2	22	18	12.2	18	37

PV-Stainless Steel Union Elbow Connector




Specifications	A	B	C	D	E	F	L
4-4	10	4.2	12	8	10	2	27
6-6	12	6.2	12	10	12	2	29.5
8-8	14	8.2	12	12	14	2	31
10-10	16	10.2	12	15	17	2	33.3
12-12	18	12.2	12	17	19	2	36
16-16	22	16.2	12	20	23	2	40

PE-Stainless Steel Union Tee Connector




Specifications	A	B	C	D	E	F	H	L
4-4	10	4.2	11	8	10	2	26.5	44
6-6	12	6.2	11	10	12	2	29	46
8-8	14	8.2	12	12	14	2	31.4	48
10-10	16	10.2	12	15	17	2	33.5	52
12-12	18	12.2	12	17	19	2	35	52
14-14	20	14.2	12	20	22	2	40	64
16-16	22	16.2	12	20	23	2	40.5	64

PM-Stainless Steel Bulkhead Connector




Specifications	A	B	b	C	D	E	L	F
4-4	10	14	4.2	10	4	2	33	M12*1
6-6	12	17	6.2	9	4	2	32	M14*1
8-8	14	17	8.2	9	4	2	33	M16*1
10-10	16	19	10.2	9	4	2	33	M18*1
12-12	18	22	12.2	10	4	2	34	M20*1

PM-Stainless Steel Bulkhead Connector




Specifications	A	B	C	D	D1	L
4-4	4	10	14	4.2	M12*1	32
6-6	4	12	17	6.2	M14*1	33
8-8	4	14	19	8.2	M16*1	33
10-10	4	16	22	10.2	M18*1	35
12-12	4	18	22	12.2	M20*1	36
14-14	4	20	24	14.2	M22*1	36
16-16	4	22	27	16.2	M24*1	37

PK-Stainless Steel Bulkhead Connector

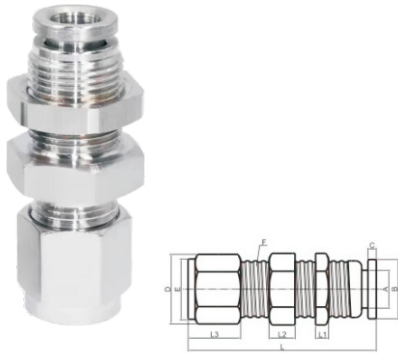

Specifications	A	B	C	D	E	L	L1	L2	F
4-4	4.2	10	2	14	12	44	4	7	M12*1
6-6	6.2	12	2	17	14	45	4	8	M14*1
8-8	8.2	14	2	17	16	45	4	7	M16*1
10-10	10.2	16	2	19	18	47	4	8	M18*1
12-12	12.2	18	2	22	21	48	4	7	M20*1
14-14	14.2	20	2	24	26	52	4	8	M22*1
16-16	16.2	22	2	26	25	52	4	8	M24*1

PZ-Stainless Steel Bulkhead Connector

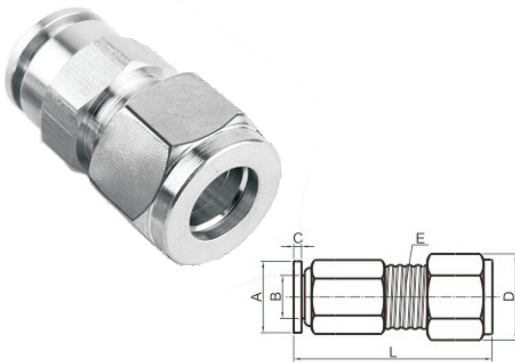

Specifications	A	B	C	D	L
6-6	12	6.2	2	14	35
8-8	14	8.2	2	17	35
10-10	16	10.2	2	19	36
12-12	18	12.2	2	22	37
14-14	20	14.2	2	24	42
16-16	22	16.2	2	26	42

PMF Stainless Steel Bulkhead Connector



Specifications	A	B	b	C	D	E	F	L	G
4-01	10	14	4.2	9	4	2	G1/8	28	M12*1
4-02	10	14	4.2	11	4	2	G1/4	30	M12*1
6-01	12	17	6.2	9	4	2	G1/8	26	M14*1
6-02	12	17	6.2	11	4	2	G1/4	30	M14*1
8-01	14	19	8.2	11	4	2	G1/8	30	M16*1
8-02	14	19	8.2	9	4	2	G1/4	26	M16*1
8-03	14	19	8.2	11	4	2	G3/8	28	M16*1
8-04	14	19	8.2	11	4	2	G1/2	31	M16*1
10-02	16	22	10.2	13	4	2	G1/4	34	M18*1
10-03	16	22	10.2	9	4	2	G3/8	30	M18*1
10-04	16	22	10.2	11	4	2	G1/2	30	M18*1
12-02	18	22	12.2	11	4	2	G1/4	31	M20*1
12-03	18	22	12.2	13	4	2	G3/8	34	M20*1
12-04	18	22	12.2	11	4	2	G1/2	27	M20*1
14-04	20	24	14.2	11	4	2	G1/2	31	M22*1
16-04	22	27	16.2	13	4	2	G1/2	35	M24*1

PC-G Stainless Steel Straight mate Connector




Specifications	A	B	C	D	d	L	I
6-G01	12	14	8	G1/8	6.2	19.5	5
6-G02	12	17	8	G1/4	6.2	21	6
8-G01	14	14	11	G1/8	8.2	23.5	5
8-G02	14	17	10	G1/4	8.2	23	6
8-G03	14	19	10	G3/8	8.2	23.5	6
8-G04	14	22	8	G1/2	8.2	24	8
10-G02	16	17	9	G1/4	10.2	22	6
10-G03	16	19	10	G3/8	10.2	23.5	6
10-G04	16	22	8	G1/2	10.2	23.5	9
12-G02	18	19	12	G1/4	12.2	25	6
12-G03	18	19	12	G3/8	12.2	25	6
12-G04	18	22	7	G1/2	12.2	23	9
14-G04	20	22	9	G1/2	14.2	25.5	9
16-G03	22	24	12	G3/8	16.2	25	6
16-G04	22	24	10	G1/2	16.2	27	9
4-M5	10	10	9	M5*0.8	4.2	20.5	4
4-M6	10	10	9	M6*0.8	4.2	20.5	4
4-M8	10	12	6	M8*1	4.2	18	5
6-M5	12	12	9	M5*0.8	6.2	20.3	4
6-M6	12	12	9	M6*0.8	6.2	20.3	4
6-M10	12	12	6	M10*1	6.2	18	5
8-M10	14	14	9	M10*1	8.2	21.4	5

PL-G Stainless Steel Elbow Male Connector




Specifications	A	a	B	b	C	D	e	H	L2
4-G01	10	4.2	10	8	7	G1/8	2	28	15
6-G01	12	6.2	12	10	6	G1/8	2	30.5	15
6-G02	12	6.2	12	10	8	G1/4	2	31	14.5
6-G03	12	6.2	12	10	6	G3/8	2	33	15
6-G04	12	6.2	12	10	7	G1/2	2	34	15
8-G01	14	8.2	14	12	6	G1/8	2	30.5	15.5
8-G02	14	8.2	14	12	8	G1/4	2	33	16
8-G03	14	8.2	14	12	6	G3/8	2	34	15.5
8-G04	14	8.2	14	12	7	G1/2	2	35	15.5
10-G02	16	10.2	17	15	8	G1/4	2	35	16
10-G03	16	10.2	17	15	6	G3/8	2	35	15.5
10-G04	16	10.2	17	15	7	G1/2	2	37	16
12-G02	18	12.2	19	17	7	G1/4	2	35.5	16
12-G03	18	12.2	19	17	6	G3/8	2	36	15
12-G04	18	12.2	19	17	7	G1/2	2	37	16
4-M5	10	4.2	10	8	7	M5*0.8	2	29	9
4-M6	10	4.2	10	8	7	M6*0.8	2	29	9
6-M5	12	6.2	12	10	7	M5*0.8	2	29	10
6-M6	12	6.2	12	10	7	M6*0.8	2	29	10

PLF Stainless Steel Elbow Feale Connector




Specifications	L1	L2	L3	H	S	T	D1	D2
4-M5	17.5	15	-	5	12	M5	Φ8	Φ4
4-M6	17.5	15	-	5	12	M6	Φ8	Φ4
4-01	17.5	20	-	8	14	G1/8	Φ10	Φ4
4-02	17.5	22	-	9.5	17	G1/4	Φ10	Φ4
6-M5	24	24	-	8	12	M5	Φ12	Φ6
6-M6	24	24	-	8	12	M6	Φ12	Φ6
6-01	24	24	-	8	14	G1/8	Φ12	Φ6
6-02	24	21	-	9.5	17	G1/4	Φ12	Φ6
6-03	24	22	-	10.5	19	G3/8	Φ12	Φ6
6-04	24	23	-	12.5	24	G1/2	Φ12	Φ6
8-01	26.5	19	-	8	14	G1/8	Φ14	Φ8
8-02	26.5	21	-	9.5	17	G1/4	Φ14	Φ8
8-03	26.5	22	-	10.5	19	G3/8	Φ14	Φ8
8-04	26.5	23	-	12.5	24	G1/2	Φ14	Φ8
10-01	31	22	-	8	14	G1/8	Φ16	Φ10
10-02	31	25	-	9.5	17	G1/4	Φ16	Φ10
10-03	31	26	-	10.5	19	G3/8	Φ16	Φ10
10-04	31	27	-	12.5	24	G1/2	Φ16	Φ10
12-02	32.5	27.5	-	9.5	17	G1/4	Φ18	Φ12
12-03	32.5	28.5	-	10.5	19	G3/8	Φ18	Φ12
12-04	32.5	29.5	-	12.5	24	G1/2	Φ18	Φ12
14-02	30	37	-	15	24	G1/4	Φ20	Φ14
14-03	30	37	-	15	24	G3/8	Φ20	Φ14
14-04	30	37	-	15	24	G1/2	Φ20	Φ14
16-02	30	37	-	15	24	G1/4	Φ22	Φ16
16-03	30	37	-	15	24	G3/8	Φ22	Φ16
16-04	30	37	-	15	24	G1/2	Φ22	Φ16

PD-Stainless Steel Tee Male Connector




Specifications	L1	L2	L3	H	S	T	D1	D2
4-M5	17.5	18	17.5	4	12	M5	Ø8	Ø4.2
4-M6	17.5	18	17.5	4	12	M6	Ø8	Ø4.2
4-01	17.5	19.5	17.5	8	12	R1/8	Ø8	Ø4.2
4-02	17.5	21.5	17.5	9	14	R1/4	Ø8	Ø4.2
6-M5	24	19	24	4	12	M5	Ø12	Ø6.2
6-M6	24	19	24	4	12	M6	Ø12	Ø6.2
6-01	24	22	24	8	12	R1/8	Ø12	Ø6.2
6-02	24	24	24	9	14	R1/4	Ø12	Ø6.2
6-03	24	24.5	24	9	17	R3/8	Ø12	Ø6.2
6-04	24	26.5	24	13	22	R1/2	Ø12	Ø6.2
8-01	26.5	23	26.5	8	12	R1/8	Ø14	Ø8.2
8-02	26.5	25	26.5	9	14	R1/4	Ø14	Ø8.2
8-03	26.5	25.5	26.5	9	17	R3/8	Ø14	Ø8.2
8-04	26.5	27.5	26.5	13	22	R1/2	Ø14	Ø8.2
10-01	31	24	31	8	17	R1/8	Ø16	Ø10.2
10-02	31	26	31	9	17	R1/4	Ø16	Ø10.2
10-03	31	28	31	9	17	R3/8	Ø16	Ø10.2
10-04	31	30	31	13	22	R1/2	Ø16	Ø10.2
12-02	32.5	29.5	32.5	9	17	R1/4	Ø18	Ø12.2
12-03	32.5	30	32.5	9	17	R3/8	Ø18	Ø12.2
12-04	32.5	32	32.5	13	22	R1/2	Ø18	Ø12.2

POC outer hexagon quick insert straight through

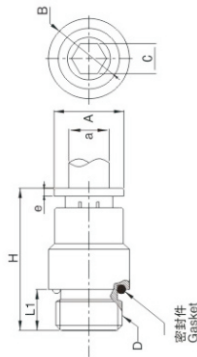


Specifications	A	a	B	C	D	e	H	L1
4-M5	10	4.2	10	2	M5	2	21.3	5
4-G01	12	4.2	12	3	G1/8	2	19.5	5
4-G02	14	4.2	14	3	G1/4	2	19	6
6-M5	12	6.2	12	2	M5	2	23	5
6-G01	11.6	6.2	11.6	4	G1/8	2	21	5
6-G02	13.8	6.2	13.8	4	G1/4	2	20	6
8-G01	13.7	8.2	13.7	5	G1/8	2	24	5
8-G02	13.7	8.2	13.7	5	G1/4	2	24	6
8-G03	18	8.2	18	5	G3/8	2	21.5	6
8-G04	21.8	8.2	21.8	5	G1/2	2	24	8
10-G01	15.8	10.2	15.8	6	G1/8	2	25.2	5
10-G02	15.8	10.2	15.8	8	G1/4	2	25.2	6
10-G03	18	10.2	18	8	G3/8	2	20.6	6
10-G04	21.6	10.2	21.6	8	G1/2	2	24	8
12-G02	18	12.2	18	8	G1/4	2	27	6
12-G03	18	12.2	18	8	G3/8	2	21	6
12-G04	21.6	12.2	21.6	8	G1/2	2	25	8

SL-Stainless Steel Speed Connector

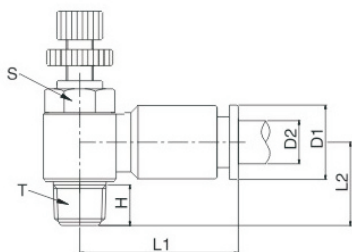


Specifications	L1	L2	H	S	T	D1	D2
4-M5	27	13	5	12	M5	10	4.2
4-M6	27	13	5	12	M6	10	4.2
4-01	27	15	9	12	1/8	10	4.2
4-02	28	18	10	14	1/4	10	4.2
6-M5	27	13	5	12	M5	12	6.2
6-M6	27	13	5	12	M6	12	6.2
6-01	27	15	9	12	1/8	12	6.2
6-02	28	18	10	14	1/4	12	6.2
6-03	29	22	10	19	3/8	12	6.2
6-04	32	23	14	24	1/2	12	6.2
8-01	27	15	9	12	1/8	14	8.2
8-02	28	18	10	14	1/4	14	8.2
8-03	29	22	10	19	3/8	14	8.2
8-04	32	23	14	24	1/2	14	8.2
10-01	33	17	9	14	1/8	16	10.2
10-02	33	17	10	14	1/4	16	10.2
10-03	33	22	10	19	3/8	16	10.2
10-04	35	23	14	24	1/2	16	10.2
12-02	33	18	10	14	1/4	18	12.2
12-03	33	22	10	19	3/8	18	12.2
12-04	35	23	14	24	1/2	18	12.2

KL Stainless Steel quick twist elbow with external thread




Specifications	L	L1	S1	S2	H	T
6*4-M5	20	25	12	12	6.2	M5
6*4-M6	20	25	12	12	6.2	M6
6*4-01	20	25	12	12	6.2	1/8
6*4-02	20	27	12	14	6.2	1/4
6*4-03	20	27	12	17	6.2	3/8
6*4-04	20	30	12	22	6.2	1/2
8*5/8*6-01	20	25	14	12	8.2	1/8
8*5/8*6-02	20	27	14	14	8.2	1/4
8*5/8*6-03	20	27	14	17	8.2	3/8
8*5/8*6-04	20	30	14	22	8.2	1/2
10*6.5/10*8-01	21	27	16	12	10.2	1/8
10*6.5/10*8-02	21	28	16	14	10.2	1/4
10*6.5/10*8-03	21	28	16	17	10.2	3/8
10*6.5/10*8-04	21	32	16	22	10.2	1/2
12*8/12*10-02	22	28	18	14	12.2	1/4
12*8/12*10-03	22	28	18	17	12.2	3/8
12*8/12*10-04	22	32	18	22	12.2	1/2

PY-Stainless Steel Union Y Connector



Specifications	ØD	ØP	L	J
4-4	4.2	10	35	14
6-6	6.2	12	35	13
8-8	8.2	14	35	14
10-10	10.2	16	41	16
12-12	12.2	18	43	19
14-14	14.2	20	44	22
16-16	16.2	22	49	24

PW-Stainless Steel Union Y Connector




Specifications	D1	D2	L2	D2
6-4	10	6.2	15	35
8-4	12	8.2	15	35
8-6	12	8.2	15	35
10-6	14	10.2	20	41
10-8	14	10.2	20	41
12-8	16	12.2	20	43
12-10	16	12.2	20	43
16-12	20	16.2	24	71

PZA Stainless Steel Quick plug four




Specifications	L	D1	D2
4	43.5	10	4
6	45	12	6
8	49	14	8
10	50.5	16	10
12	53	18	12
14	58	20	14
16	59	21	16

SA Stainless steel hand speed valve




Specifications	A	B	C	D	E	L	Wight(g)
Ø4	11.9	4.2	45	15.2	16.5	50.4	50
Ø6	11.9	6.2	45	15.2	16.5	50.4	50
Ø8	13.9	8.2	46.7	14.8	16.5	50.9	65.6
Ø10	15.9	10.2	45.9	15	16.5	51.8	60.1
Ø12	17.9	12.2	45.7	14.9	17.9	52.4	57.7

PLM- Stainless Steel quick insert elbow through plate




Specifications	Hexagon	D	D1	L	L1	L2	M
6-6	17	6.2	12	23	35	10	M14*1
8-8	17	8.2	14	24	35	10	M16*1
10-10	19	10.2	16	26	37	10	M18*1
12-12	22	12.2	18	27	37	10	M20*1
16-16	27	16.2	22	31	42	10	M24*1

PX- Stainless steel Y thread quick insert tee

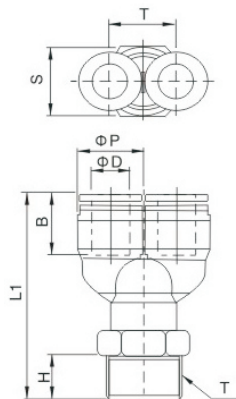


Specifications	H	S	T	L1	L2	ØD	ØP
4-M5	4	12	M5	34	13	4.2	10
4-01	8	12	1/8	35	13	4.2	10
4-02	9	14	1/4	37	13	4.2	10
6-M5	4	12	M5	37	13	6.2	12
6-01	8	12	1/8	46	13	6.2	12
6-02	9	14	1/4	46	13	6.2	12
6-03	9	17	3/8	50	13	6.2	12
6-04	13	22	1/2	53	13	6.2	12
8-01	8	12	1/8	46	14	8.2	14
8-02	9	14	1/4	48	14	8.2	14
8-03	9	17	3/8	52	14	8.2	14
8-04	13	22	1/2	55	14	8.2	14
10-01	8	12	1/8	45	16	10.2	16
10-02	9	14	1/4	48	16	10.2	16
10-03	9	17	3/8	52	16	10.2	16
10-04	13	22	1/2	55	16	10.2	16
12-02	9	14	1/4	52	19	12.2	18
12-03	9	17	3/8	55	19	12.2	18
12-04	13	22	1/2	58	19	12.2	18

PH- stainless steel hinged rotary elbow

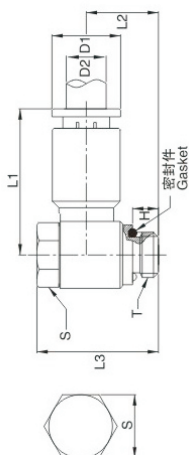

Specifications	A	B	C	D	D1	E
4-M5	21	15	24.5	5	M5	14
4-01	21	15	24.5	5	1/8	16
4-02	23	18	27	7.0	1/4	14
6-M5	23	18	27	7.0	M5	14
6-01	23	15	24.5	5	1/8	16
6-02	24	18	27	7.0	1/4	21
6-03	26	20	32	7.5	3/8	24
6-04	28	22.5	35	9	1/2	14
8-01	24.5	15	24.5	5	1/8	16
8-02	25.5	18	27	7.0	1/2	21
8-03	27.5	20	32	7.5	3/8	24
8-04	30	22.5	35	9	1/2	14
10-01	26.5	16	24.5	5	1/8	16
10-02	27.5	19	27	7	1/4	21
10-03	29.5	20	32	7.5	3/8	24
10-04	29.5	22.5	35	9	1/2	14
12-01	28	17	24.5	5	1/8	16
12-02	29	20	27	7	1/4	21
12-03	31	21	32	7.5	3/8	24
12-04	32	22.5	35	9	1/2	21
14-03	40	22.5	32	7.5	3/8	24
14-04	40	24	35	9	1/2	21
16-03	40	22.5	32	7.5	3/8	24
16-04	40	24	35	9	1/2	21

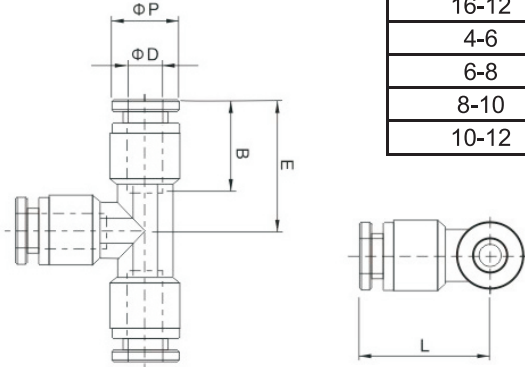PEG- Stainless steel T- reducer tee

Specifications	ΦD1	ΦD2	ΦP1	ΦP2	L	E	B1	B2	B2
6-4	6.2	4.2	11.8	9.8	23	23	15	15	30
8-4	8.2	4.2	13.8	9.8	25	25	15	15	41
8-6	8.2	6.2	13.8	11.8	25	25	15	15	43
10-6	10.3	6.2	15.8	11.8	26	26	15	15	63
10-8	10.3	8.2	15.8	13.8	26	26	15	15	63
12-8	12.3	8.2	17.8	13.8	26	26	15	15	74
12-10	12.3	10.3	17.8	15.8	26	26	15	15	70
16-10	16.3	10.3	21.8	15.8	32	32	16	16	94
16-12	16.3	12.3	21.8	17.8	32	32	16	16	97
4-6	4.2	6.2	9.8	11.8	23	23	15	15	30
6-8	6.2	8.2	11.8	13.8	25	25	15	15	42
8-10	8.2	10.3	13.8	15.8	26	26	15	15	62
10-12	10.3	12.3	15.8	17.8	26	26	15	15	76

PP- Stainless Steel flat head silencer

Specifications	Height	Hexagon size	Thread size
01	15	12	1/8
02	18	17	1/4
03	18	19	3/8
04	21.2	22	1/2
06	24	27	3/4

PJ- Stainless Steel pointed silencer

Specifications	Height	Hexagon size	Thread size
01	30	12	1/8
02	37	17	1/4
03	43.5	19	3/8
04	49	22	1/2
06	56	27	3/4

Stainless Steel Card Sets Terminal Through Joint

Matching Thread		Matching Diameter			
R1/8	NPT1/8	4	16	1/8-3.18	
R1/4	NPT1/4	6	18	1/4-6.35	
R3/8	NPT3/8	8	20	3/8-9.53	
R1/2	NPT1/2	10	22	1/2-12.7	
R3/4	NPT3/4	12	24	3/4-19.1	
R1	NPT1	14	26	1-25.4	

Card Sets Type Through Pipe Joint

Matching Diameter		
4	16	1/8-3.18
6	18	1/4-6.35
8	20	3/8-9.53
10	22	1/2-12.7
12	24	3/4-19.1
14	26	1-25.4

Stainless Steel Card Sets Bend Joint


Matching Diameter		
4	16	1/8-3.18
6	18	1/4-6.35
8	20	3/8-9.53
10	22	1/2-12.7
12	24	3/4-19.1
14	26	1-25.4

Stainless Steel Card Sets Three Way Joint

Matching Diameter		
4	16	1/8-3.18
6	18	1/4-6.35
8	20	3/8-9.53
10	22	1/2-12.7
12	24	3/4-19.1
14	26	1-25.4

Card Sets Type Right Angle Pipe Joint


Matching Diameter		
4	16	1/8-3.18
6	18	1/4-6.35
8	20	3/8-9.53
10	22	1/2-12.7
12	24	3/4-19.1
14	26	1-25.4

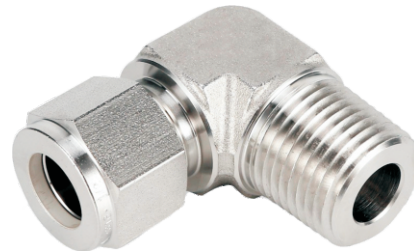Stainless Steel Card Sets Terminal Right Angle Joint


Matching Thread		Matching Diameter		
R1/8	NPT1/8	4	16	1/8-3.18
R1/4	NPT1/4	6	18	1/4-6.35
R3/8	NPT3/8	8	20	3/8-9.53
R1/2	NPT1/2	10	22	1/2-12.7
R3/4	NPT3/4	12	24	3/4-19.1
R1	NPT1	14	26	1-25.4

Card Sets Type Three Way Joint

Matching Diameter		
4	16	1/8-3.18
6	18	1/4-6.35
8	20	3/8-9.53
10	22	1/2-12.7
12	24	3/4-19.1
14	26	1-25.4

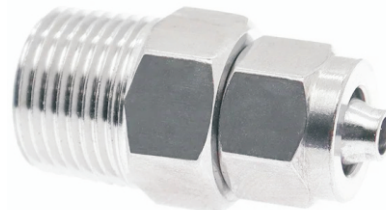Stainless Steel Quick Twist Through Joint

Matching Thread		Matching Diameter		
R1/8	NPT1/8	4	16	1/8-3.18
R1/4	NPT1/4	6	18	1/4-6.35
R3/8	NPT3/8	8	20	3/8-9.53
R1/2	NPT1/2	10	22	1/2-12.7
R3/4	NPT3/4	12	24	3/4-19.1
R1	NPT1	14	26	1-25.4

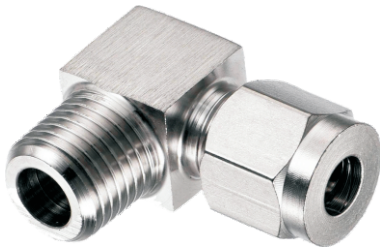Stainless Steel Card Sets Bend Joint

Matching Thread		Matching Diameter		
R1/8	NPT1/8	4	16	1/8-3.18
R1/4	NPT1/4	6	18	1/4-6.35
R3/8	NPT3/8	8	20	3/8-9.53
R1/2	NPT1/2	10	22	1/2-12.7
R3/4	NPT3/4	12	24	3/4-19.1
R1	NPT1	14	26	1-25.4

Stainless Steel Card Sets Three Way Joint

Matching Diameter		
4	16	1/8-3.18
6	18	1/4-6.35
8	20	3/8-9.53
10	22	1/2-12.7
12	24	3/4-19.1
14	26	1-25.4

KZF Type Stainless Steel Self Locking Type Quick Joint

Model	Matching Thread	Model	Matching Thread
DN8	R1/4 NPT1/4	DN32	R1-1/4 NPT1-1/4
DN10	R3/8 NPT3/8	DN40	R1-1/2 NPT1-1/2
DN15	R1/2 NPT1/2	DN50	R2 NPT2
DN20	R3/4 NPT3/4	DN65	R2-1/2 NPT2-1/2
DN25	R1 NPT1	DN80	R3 NPT3

KZF-Stainless Steel Self-styled Quick Joint -Male Head

Model	Matching Thread	Model	Matching Thread
DN8	RC1/4	DN32	RC1-1/4
DN10	RC3/8	DN40	RC1-1/2
DN15	RC1/2	DN50	RC2
DN20	RC3/4	DN65	RC2-1/2
DN25	RC1	DN80	RC3

KZF-Stainless Steel Self-styled Quick Joint -Female Head

Model	Matching Thread	Model	Matching Thread
DN8	RC1/4	DN32	RC1-1/4
DN10	RC3/8	DN40	RC1-1/2
DN15	RC1/2	DN50	RC2
DN20	RC3/4	DN65	RC2-1/2
DN25	RC1	DN80	RC3

SP-Stainless Steel Quick Joint

Model	Matching Diameter
10SP	6
20SP	8
30SP	10
40SP	12

PP-Stainless Steel Quick Joint

Model	Matching Diameter
10PP	6
20PP	8
30PP	10
40PP	12

SM-Stainless Steel Quick Joint

Model	Matching Diameter	
10SM	R1/8	NPT1/8
20SM	R1/4	NPT1/4
30SM	R3/8	NPT3/8
40SM	R1/2	NPT1/2

PM-Stainless Steel Quick Joint

Model	Matching Diameter	
10PM	R1/8	NPT1/8
20PM	R1/4	NPT1/4
30PM	R3/8	NPT3/8
40PM	R1/2	NPT1/2

SH-Stainless Steel Quick Joint

Model	Matching Diameter
10SH	6
20SH	8
30SH	10
40SH	12

PH-Stainless Steel Quick Joint

Model	Matching Diameter
10PH	6
20PH	8
30PH	10
40PH	12

SF-Stainless Steel Quick Joint

Model	Matching Thread	
20SF	R1/4	NPT1/4
30SF	R3/8	NPT3/8
40SF	R1/2	NPT1/2

PF-Stainless Steel Quick Joint

Model	Matching Thread	
20PF	R1/4	NPT1/4
30PF	R3/8	NPT3/8
40PF	R1/2	NPT1/2