


A1014 SERIES

1.00mm pitch wire to board connector

A1014-T

1.00mm pitch Crimp Terminal

Reference Informations:

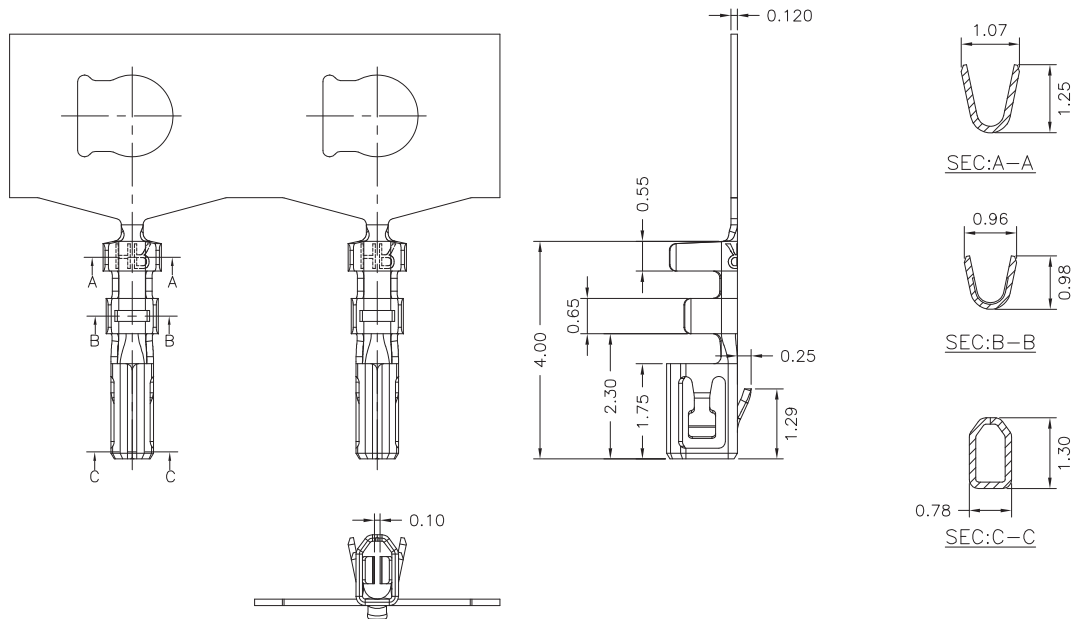

Ordering Information & Specifications:

Unit:mm

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1014-GPE-A	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Gold-plated	15,000pcs


Note:E-Stamping before Gold-plated

A1014H-2

1.00mm pitch Dual Row Housing


Reference Informations:

*Material: Nylon 66,UL94V-0

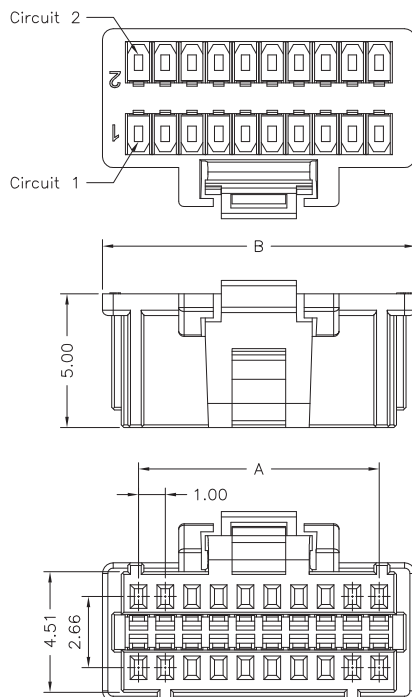

A1014H-2X15P	N	0	W	NP	N	00	G
	①	②	③	④	⑤	⑥	⑦

① N=Halogen Free
② Material: 0=Nylon 66-V0
③ Color: W=White
④ Plating code: NP=Non-plating
⑤ Plating code: N=Non-plating
⑥ Option code: 00=Standard
⑦ Packing code: G=Bag



Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A1014H-2X10P	9.00	11.70
A1014H-2X15P	14.00	16.70
A1014H-2X16P	15.00	17.70
A1014H-2X20P	19.00	21.70
A1014H-2X25P	24.00	26.70

Unit:mm

A1014 SERIES

1.00mm pitch wire to board connector



A1014WV-S-2

1.00mm pitch 180° Dual Row Wafer - SMT TYPE

Reference Informations:

*Material: Pin: Phosphor Bronze/Gold-plated
Solder Tabs: Brass/Tin-plated
Wafer: Nylon 6T,UL94V-0
Cap: Nylon 6T,UL94V-0

A1014WV-S-2X15P		N	6	B	G2	T	00	L
①	②	③	④	⑤	⑥	⑦		
① N=Halogen Free								
② Material: 6=Nylon 6T								
③ Color: B=Black								
④ Plating code: G2=Gold-plated 3u"								
⑤ Plating code: T=Tin-plated								
⑥ Option code: 00=Standard								
⑦ Packing code: L=Tape & Reel(With Cap)								

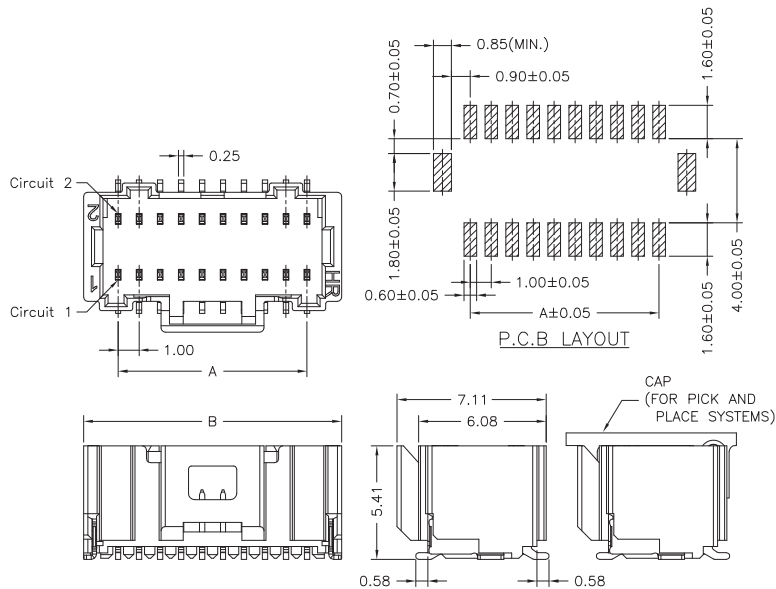

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A1014WV-S-2X10P	9.00	12.30
A1014WV-S-2X15P	14.00	17.30
A1014WV-S-2X16P	15.00	18.30
A1014WV-S-2X20P	19.00	22.30
A1014WV-S-2X25P	24.00	27.30

Unit:mm



A1014WVA-S-2

1.00mm pitch 180° Dual Row Wafer - SMT TYPE

Reference Informations:

*Material: Pin: Phosphor Bronze/Gold-plated
Solder Tabs: Brass/Tin-plated
Wafer: Nylon 6T,UL94V-0
Cap: Nylon 6T,UL94V-0

A1014WVA-S-2X15P		N	6	B	G2	T	00	L
①	②	③	④	⑤	⑥	⑦		
① N=Halogen Free								
② Material: 6=Nylon 6T								
③ Color: B=Black								
④ Plating code: G2=Gold-plated 3u"								
⑤ Plating code: T=Tin-plated								
⑥ Option code: 00=Standard								
⑦ Packing code: L=Tape & Reel(With Cap)								

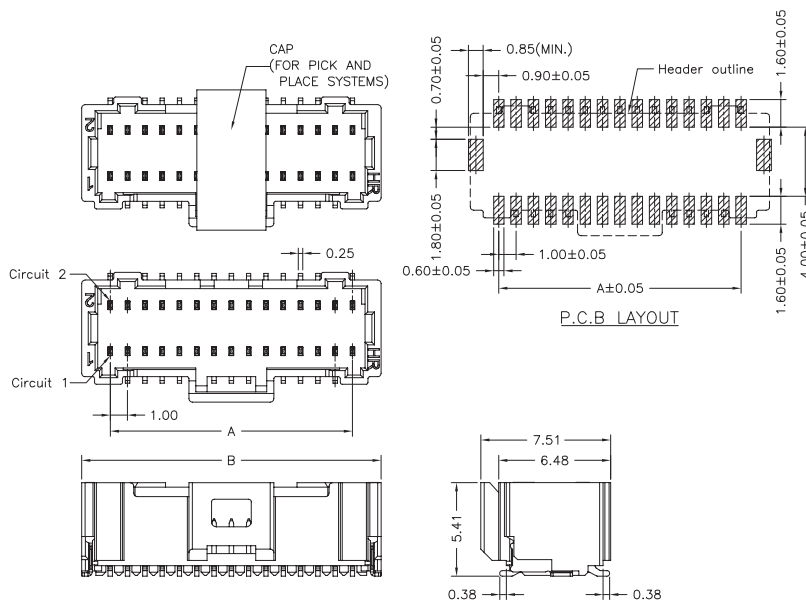

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A1014WVA-S-2X10P	9.00	12.30
A1014WVA-S-2X15P	14.00	17.30
A1014WVA-S-2X16P	15.00	18.30
A1014WVA-S-2X20P	19.00	22.30
A1014WVA-S-2X25P	24.00	27.30

Unit:mm

A1014 SERIES



1.00mm pitch wire to board connector

A1014WVB-S-2

— 1.00mm pitch 180° Dual Row Wafer - SMT TYPE —

Reference Informations:

*Material: Pin: Phosphor Bronze/Gold-flash
Solder Tabs: Brass/Tin-plated
Wafer: Nylon 6T,UL94V-0
Cap: Nylon 6T,UL94V-0

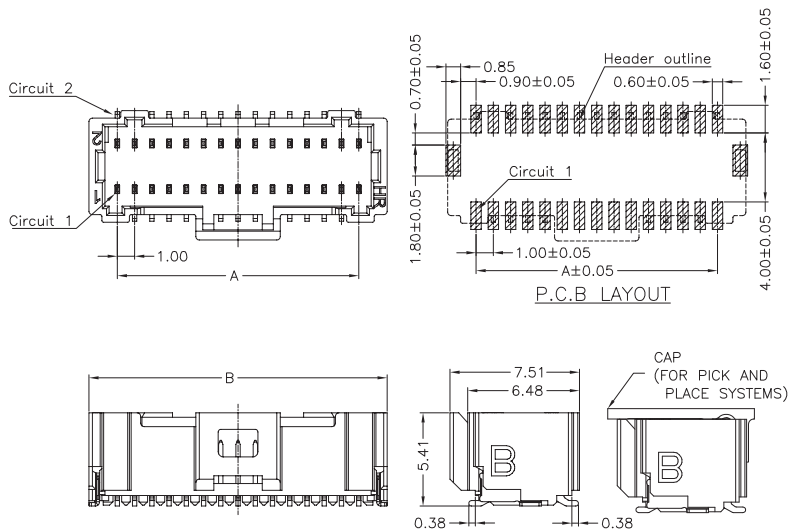

	A1014	WVB	S-S-2X15P	XXX
①	②	③	④	⑤
① Series No.				
② Connector type: WV=Vertical B Type				
③ Mounting type: S=SMT				
④ NO. of Circuits				
⑤ Plating code:				
Blank=Contacts/Gold+flash and				
Solder tabs/Matte Tin-plated				

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A1014WVB-S-2X08P	7.00	10.30
A1014WVB-S-2X10P	9.00	12.30
A1014WVB-S-2X15P	14.00	17.30
A1014WVB-S-2X16P	15.00	18.30
A1014WVB-S-2X20P	19.00	22.30
A1014WVB-S-2X25P	24.00	27.30

Unit:mm