
KUUVAN

マグネットQi2(25W)
ワイヤレス充電器
(冷却機能付き)
取扱説明書

品番:C5



この度はマグネットQi2(25W)(冷却機能付き)「C5」(以下本製品)をお買い上げいただき、
誠にありがとうございます。ご使用の前にこの取扱説明書をよくお読みください。
読み終わったあともこの取扱説明書は大切に保管してください。

最初にご確認ください。

お使いになる前に、セット内容がすべて揃っているかご確認ください。
万一、足りないものがありましたら、お買い求めの販売店にご連絡ください。

セット内容

①充電器(冷却機能付き) ……1台
②USB Type-Cケーブル(1m) …1本
③メタルリング ……2枚
④取扱説明書・保証書(本書) ……1部

※部品の欠品や破損があった場合は、**品番**(C5)と
上記の番号(①~④)と**名称**(USB Type-Cケーブルなど)をお知らせください。

デザイン及び仕様については改良のため予告なしに変更することがあります。
本書に記載の社名及び製品名は各社の商標又は登録商標です。


1.特長

●WPC(ワイヤレスパワーコンソーシアム)が策定したワイヤレス給電の国際標準規格「Qi(チー)2」に準拠した、正規認証品です。
●本製品は最新規格Qi2に対応し、マグネット吸着でiPhone16以降やPixel 10 Pro XL以降、Galaxy S26 Ultra以降の最新機種を最大25W、iPhone12以降やGalaxy S25/Z Fold7/Z Flip7などを最大15Wで効率よく急速充電できる車載ワイヤレス充電ホルダーです。
●冷却のみモードを搭載しており、スマートフォンに負荷がかかる作業時でも、効果的に冷却できます。
●冷却機能を搭載され、充電中の発熱を抑制し、通常のワイヤレス充電器に比べ効率よく充電できます。
●MagSafe対応iPhoneに内蔵されているマグネットと同じ形状でマグネットを配置しているので、iPhone12以降型番やPixel 10以降型番をピッタリ固定できます。
●マグネットでぴったり固定することで縦・横いずれの向きでも設置でき、充電しながらスマートフォンを使えます。
●ワイヤレス充電のため、スマートフォン本体の充電ポートは使用しません。有線イヤホンやUSBメモリなどを挿した状態での充電も可能です。
●スマートフォンが濡れた直後でも、背面の水滴を拭き取ることですぐに充電できます。
「コネクターが濡れてすぐに接続できない…」といったシーンでも活躍します。
※本製品に防水機能はありません。
●スマートフォンが揺っても、振動で充電部分がズレたり外れたりせず、安定して充電が可能です。
●異物検知機能(FOD)を搭載しており、安全にご利用いただけます。
●マグネット搭載ワイヤレス充電対応ケースを付けたままの充電が可能です。
●ワイヤレス充電対応ケース以外の、金属・磁石などを含むリング・ケースなどはご利用いただけません。
発熱の危険性があるため取り外してご利用ください。

2.仕様

サイズ・重量	約67X67X22mm、約90g
素材	ABS樹脂、アルミニウム
対応機種	Qi2(MPP)25W規格のワイヤレス充電に対応した機器
コネクタ(入力)	USB Type-Cポート メス
定格入力	5V/3A、DC9V/3A、DC12V/3A、**DC15V/3A(推奨)**
定格出力	5W/7.5W/10W/15W/25W iPhone:最大25W
動作温度範囲	0℃~40℃
消費電力(冷却)	約6W
ファン回転数	4200回転数/分

3.各部の名称

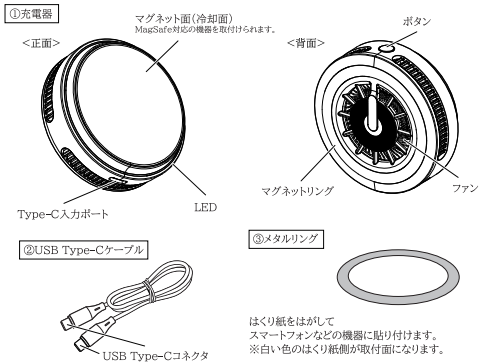


ボタンの操作について
上部のボタンを押すことで、LEDライトの切り替えやモードの変更ができます。
1回押し:LEDライトの色調が切り替わります。(虹色 → 青色 → ピンク → 順に繰り返し)
2回連続押し(ダブルクリック):LEDライトが消灯あるいは点灯します。
5秒間長押し:「冷却のみモード(ブルーライト)」あるいは「冷却+充電モード」に切り替わります。

※電源の再接続について
再度電源を入れた際、LEDライトは前回OFFにした時の点灯モードが引き継がれます。
モード設定はリセットされ、**「冷却+ワイヤレス充電モード」**に戻ります。


4.機器の取付け方法

機器をマグネットホルダーに近づけ、
しっかりと磁力で固定される位置に取付けます。

ご使用前に機器がしっかりと取付けられていることを確認してください。




〈MagSafe非対応の機器の場合〉

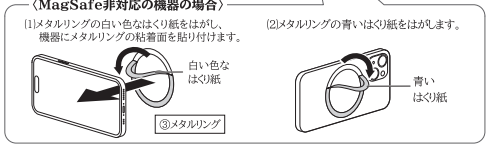

■スマートフォンの取付け
本製品はマグネット内蔵なのでMagSafe対応スマートフォンを当てるだけで片手で簡単に取付けることができます。自動的にスマートフォンの充電と冷却を開始します。

■スマートフォンの取外し
スマートフォンを離すだけで簡単に取外すことができます。
●MagSafe対応スマートフォン・カバーまたはメタルリングを貼り付けた機器を必ずご使用ください。
上記を満たしていない場合、スマートフォンが落下する恐れがあります。
●充電器の磁力が強いので、スマートフォンを取外す際は、スマートフォンを持たないもう片方の手でホルダーをしっかり押さえながら取外してください。

5.電源の接続

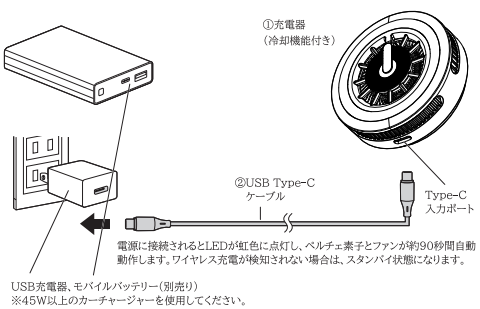


■5W充電モードで使用する場合
3A以上の出力に対応したUSB外部電源に接続してください。
最大5Wまでのワイヤレス充電でお使いいただけます。または、冷却機能を動作されない。

⚠ **本製品を最大出力が5V/3A未満のUSB外部電源に接続した場合、正常に充電できない場合があります。必ず5V/3A以上、またはDC12V/3A、DC15V/3Aの USB Power Delivery対応のUSB外部電源に接続してください。**


■25W急速充電モードで使用する場合
最大25Wの急速充電モードで使用する場合は、DC15V/3AのUSB Power Deliveryに対応したUSB外部電源に接続してください。
※Qi2(MPP)25W規格のワイヤレス充電に対応した機器は最大25Wでの充電になります。

6.多機能の拡張対応



❗ ●MagSafe非対応機種は付属のメタルリング③を機器裏面に取付けることで充電器への取付けが可能です。
●MagSafe対応スマートフォン・カバーまたはメタルリングを貼り付けた機器を必ずご使用ください。
上記を満たしていない場合、スマートフォンが落下する恐れがあります。

当販売店で取り扱っている各種マグネットアームやマグネットホルダーにも対応しています。

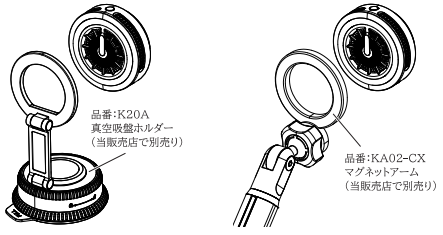

7.使用上のご注意

●機能が正常に働かない恐れがある状況
下記の状況では正常に充電できない場合があります。
・充電機器が濡れ電の場合。
・5V/3A未満の出力のUSB外部電源に接続している場合。
・本製品と充電機器の間に異物がある場合。
・充電により、充電機器の温度が高温になっている場合。
・充電機器の充電面を正面にして設置した場合。
・充電機器と本製品の充電エリアがずれて設置された場合。
・近くにテレビ塔、発電所、ガソリンスタンド、放送局、大型ディスプレイ、空港など強い電波やノイズの発生する場所で使用した場合。
・充電機器がアルミ箔などの金属の貼られたカードに接している場合。
・充電機器が金属製のスマートフォンカバーなどで覆われている場合。
・近くで電波式ワイヤレスリモコンを使用している時。
上記以外で充電が正常に行われなかったり、LED赤色灯(FOD)が点滅したままの場合は、本製品の異常の可能性があります。
その際はお買い求めの販売店、または弊社までご連絡ください。

●使用できる充電機器について
・ワイヤレス充電に対応した機器を使用できます。ただし、全てのワイヤレス充電機器と互換性を保証しているものではありません。
・スマートフォンなどの携帯機器を対象とした低電力給電を対象としています。

●充電機器のカバーやアクセサリーについて
・ワイヤレス充電器非対応のカバーやアクセサリーを付けた状態で充電しないでください。
・充電エリアに充電機器を設置しても充電が行われない場合は、カバーやアクセサリーを取外してください。

●充電中の留意事項
・充電中は、本製品と充電機器が温かくなりますが、異常ではありません。
・充電中に温かくなった場合は、充電機器側の保護機能により充電が停止することがあります。
その場合は充電機器の温度が十分に下がってから再度充電を行ってください。
・磁気を帯びたものを近づけないでください。強い磁気を近づけると誤動作の原因になります。
・バイブレーション機能のある充電機器はバイブレーション機能をOFFにして設置してください。充電機器が振動により、本製品から脱落する恐れがあります。
・一度に複数の充電機器を充電することはできません。

●その他の留意事項
・本製品の故障、またはその使用によって生じた事故や直接、間接の損害については弊社はその責を負わないものとします。あらかじめご了承ください。
・本製品の使用に際し、設置機器を破損した場合について弊社は設置機器の保証は致しかねます。

8.品質保証

1)保証期間内に正常な使用状態でご使用の場合に限り品質を保証しております。万一保証期間内で故障がありました場合は、弊社所定の方法で無償修理いたしますので、販売店のレシートまたは領収書を製品に添えてお買い上げの販売店までお持ちください。
2)次のような場合は保証期間内でも有償修理になります。
(1)販売店のレシートまたは領収書をご提示いただけない場合。
(2)所定の項目をご記入いただけない場合、あるいは字句を書き換えられた場合。
(3)故障の原因が取扱い上の不注意による場合。
(4)故障の原因がお客様による輸送・移動中の衝撃による場合。
(5)天変地異、ならびに公害や異常電圧その他の外部要因による故障及び損傷の場合。
(6)譲渡や中古販売、オークション、転売などでご購入された場合。
3)お客様ご自身による改造または修理があったと判断された場合は、保証期間内での修理もお受けいたしかねます。
4)本製品の故障、またはその使用によって生じた直接、間接の損害については弊社はその責を負わないものとします。
5)本製品を使用中に発生したデータやプログラムの消失、または破損についての補償はいたしかねます。
6)本製品は医療機器、原子力設備や機器、航空宇宙機器、輸送設備や機器などの人命に関わる設備や機器、及び高度な信頼性を必要とする設備や機器やシステムなどへの組み込みや使用は意図されておりません。これらの用途に本製品を使用され、人身事故、社会的障害などが生じても弊社はいかなる責も負いかねます。
7)修理ご依頼品を郵送、またはご持参される場合の諸費用は、お客様のご負担となります。
8)販売店のレシートまたは領収書は再発行いたしませんので、大切に保管してください。
9)販売店のレシートまたは領収書は日本国内においてのみ有効です。

保証期間 1年


製品の品質管理には細心の注意をはらっていますが、万一、不具合な点や製品に関する
お問い合わせなどございましたら、お買い求めの販売店又は下記までお気軽にご相談ください。

SHENZHEN KUUVAN TRADING CO.,LTD.
Room 2002A, Block B, Building 2, Sihai Yunchuang Building,
Comunidad houting, Shajing Subdistrict, Bao'an District,
Shenzhen City, Guangdong Province, CN 518-104
Website: www.kuuvan.com
Line公式アカウント: @kuuvan
E-Mail: kuuvan.jp@outlook.com

KUUVAN

Magnetic Qi2 Wireless Charger (25W) with Cooling Fan User Manual

Model: C5



Thank you for purchasing the Magnetic Qi2 (25W) Wireless Charger with Cooling Fan (Model: C5). (hereinafter referred to as "the product").
Please read this manual carefully before use and keep it for future reference.

Before You Begin

Please verify that all package contents are included before using the product.
If any items are missing, please contact your retailer immediately.

Package Contents

①Wireless Charger ·····X1
②USB Type-C Cable (3.3 ft) ···X1
③Magnetic Metal Rings ·····X2
④User Manual ·····X1

Note: If any parts are missing or damaged, please specify the Model Number (C5) along with the item number (① - ④) and item name (e.g., Metal Ring) when contacting customer support.

Design and specifications are subject to change without notice for product improvement.
All company and product names mentioned herein are trademarks or registered trademarks of their respective owners.


1.FEATURES

- Certified compliant with the international Qi2 wireless charging standard established by the Wireless Power Consortium (WPC).
- Supports Qi2 magnetic charging, delivering up to 25W fast charging for iPhone 16 or newer, Pixel 10 Pro XL or newer, and Galaxy S26 Ultra or newer, as well as up to 15W for iPhone 12 or newer, Galaxy S25, Z Fold7, and Z Flip7.
- Features a dedicated cooling-only mode to effectively dissipate heat during heavy phone usage and demanding tasks.
- Integrated cooling system minimizes heat buildup during charging, ensuring faster and more efficient power delivery than conventional wireless chargers.
- Engineered to match MagSafe magnet arrays for a secure, seamless snap on iPhone 12 or newer and Pixel 10 or newer.
- Strong magnetic hold allows seamless switching between portrait and landscape orientations while charging.
- Keeps your phone's charging port accessible for wired headphones, USB drives, or other accessories while charging.
- If your phone gets wet, simply wipe the back dry to start charging without waiting for the charging port to dry out. (Note: This charger is not waterproof.)
- Incoming calls or notification vibrations won't shift or dislodge your phone, ensuring steady charging.
- Built-in FOD protection ensures safe operation by stopping power when metal objects are detected.
- Fully compatible with magnetic wireless charging cases.
- Do NOT use non-compatible cases, metal kickstands, finger rings, or cases containing metal/magnets, as they can cause overheating. Please remove them before charging.

2.SPECIFICATIONS

Dimensions & Weight	Approx. 2.64" × 2.64" × 0.87" , 3.17 oz
Materials	ABS, Aluminum Alloy
Compatibility	Qi2 (MPP) 25W wireless charging enabled devices
Input Port	USB Type-C Female
Rated Input	5V/3A, DC9V/3A, DC12V/3A, **DC15V/3A(Recommended)**
Wireless Output	5W/7.5W/10W/15W/25W (Up to 25W for iPhone)
Operating Temperature	32°F – 104°F
Cooling Power	Approx. 6W
Fan Speed	4,200 RPM

3.PRODUCT OVERVIEW

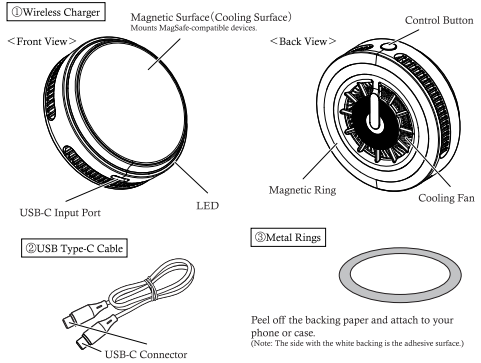


Button Operations
Press the top button to cycle LED lights and switch modes:
Single Press: Cycle LED colors (Rainbow → Cyan → Pink → Repeat).
Double Press: Turn the LED light ON/OFF.
Press & Hold for 5s: Toggle between Cooling-Only Mode (Blue Light) and Cooling + Charging Mode.

※Power Reconnection Memory
When reconnected to power, the LED retains your last lighting mode, while the operation mode resets to the default "Cooling + Wireless Charging Mode."

4.DEVICE MOUNTING

Bring your device close to the magnetic mount until it snaps firmly into place.

Verify that your phone is securely attached before use.



〈For Non-MagSafe Phones〉

[1]Remove the white backing film of the metal ring and stick the adhesive side onto the device.


[2]Peel off the blue release film from the metal ring.



■Attaching Your Smartphone
Built-in magnets allow effortless one-handed mounting for MagSafe devices. Wireless charging and active cooling will begin automatically.

■Removing Your Smartphone
Simply pull your phone away to detach.
- Always use MagSafe-compatible phones, MagSafe cases, or devices fitted with the included metal ring to prevent accidental drops.
- Due to strong magnetic force, hold the charger base with your free hand while removing your phone.

5.CONNECTING POWER

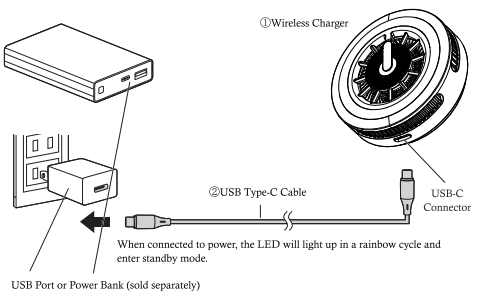


■For 5W Standard Wireless Charging
Connect to an external USB power source with a 3A or higher output. Supports standard wireless charging up to 5W. (Note: Active cooling fan will NOT operate in this mode.)

⚠ **Connecting to a USB power source with less than 5V/3A output may cause improper charging. Always use a USB Power Delivery power supply supporting 5V/3A, 9V/3A, 12V/3A, or 15V/3A (Recommended).**


■For 25W Ultra-Fast Wireless Charging
To enable maximum 25W fast charging, connect to a USB Power Delivery (PD) power source that supports DC 15V/3A output.
*Up to 25W charging rate applies only to Qi2 (MPP) 25W compatible devices.

6.MULTIFUNCTIONAL EXPANSION

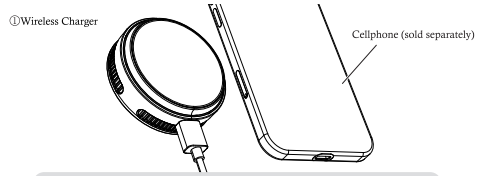

- Non-MagSafe devices can be mounted by attaching the included ③Metal Ring to the back of the phone or case.
- Always use MagSafe-compatible phones, MagSafe cases, or devices fitted with the metal ring to prevent your device from falling.

Compatible with various magnetic arms and mounts available in our store.

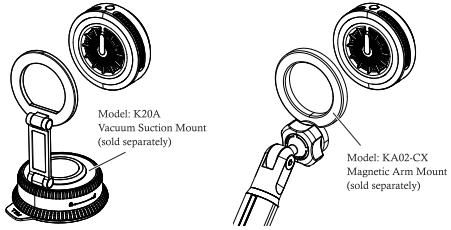

7.PRECAUTIONS FOR USE

●Conditions That May Affect Charging Performance
- Charging may be interrupted or fail under the following conditions:
- The connected device is already fully charged.
- Connected to a USB power source with an output below 5V/3A.
- Foreign objects (e.g., metal, magnetic cards) are placed between the charger and the phone.
- Overheating occurs on the phone during charging.
- The charging coils between the phone and the mount are misaligned.
- Operating in areas with strong electromagnetic interference (near broadcast towers, power stations, gas stations, airports, or large LED displays).
- Cards containing metal foil or magnetic materials are attached to the phone.
- The phone is in a heavy-duty metal case.
- Nearby RF wireless remote controls are actively operating.
- If charging fails under normal conditions or the FOD(red LED) light continues to flash,the product may be experiencing an issue. Please contact customer support or your original retailer for assistance.

●Vehicle Electronics Interference
- On certain vehicle models, radio frequencies may interfere with keyless entry systems, engine immobilizers, or other electronic control modules. Verify system functionality after installation. If issues persist after relocating the mount, discontinue use.

●Compatible Devices
- Designed for wireless-charging-enabled cellphones. Note: Compatibility with all third-party wireless devices is not guaranteed.
- Designed specifically for mobile electronic devices.

●Precautions During Charging
- It is normal for the mount and phone to feel warm during operation.
- If charging stops due to cellphone thermal protection, allow the phone to cool down before resuming.
- Keep magnetic stripe cards or sensitive magnetic objects away from the unit.
- Disable phone vibration (haptics) while mounted. Strong vibrations may cause the phone to slip or detach.
- Do not attempt to charge multiple devices simultaneously.

●Disclaimer & Limitation of Liability
- The manufacturer shall not be liable for any incidental, indirect, or consequential damages resulting from the use or misuse of this product.
- This warranty covers the charger holder only and does not cover damage to mounted electronic devices (cellphones, cases, etc.) under any circumstances.

8.LIMITED WARRANTY POLICY

1)This limited warranty covers manufacturing defects under normal use during the warranty period. If a defect arises, we will repair or replace the product free of charge upon presentation of a valid proof of purchase (sales receipt or order confirmation).
2)The warranty is void or fees may apply even within the warranty period for:
[1]Failure to provide a valid proof of purchase or order ID.
[2]Altered, defaced, or incomplete warranty documentation.
[3]Misuse, neglect, or failure to follow operational instructions.
[4]Damage caused by drop, impact, or improper transport after purchase.
[5]Damage resulting from natural disasters, power surges, or external factors.
[6]Products purchased secondhand, from unauthorized resellers, or online auctions.
3)Any unauthorized modifications, disassemblies, or self-repairs will automatically void this warranty.
4)The manufacturer is not liable for any incidental, special, or consequential damages resulting from product use or failure.
5)This warranty does not cover loss or corruption of data, apps, or software during device use.
6)This product is not intended for use in life-critical, medical, aerospace, or mission-critical equipment. The manufacturer disclaims all liability for injury or damages resulting from unauthorized critical applications.
7)Customers are responsible for shipping costs associated with returning products for warranty service.
8)Proof of purchase documents will not be reissued; please retain them for your records.
9)Warranty terms apply only within the Under U.S. of authorized purchase.

1-Year Limited Warranty

Products are manufactured under strict quality standards. If you encounter any issues or have questions, please reach out to your authorized retailer or contact us directly below:

SHENZHEN KUUVAN TRADING CO.,LTD.
Room 1803-1804, Block B, Building 2,
Sihai Yunchuang Building, Comunidad houting, Shajing Subdistrict,
Bao'an District, Shenzhen City, Guangdong Province, CN 518-104
Website: www.kuuvan.com
E-Mail: kuuvan.jp@outlook.com